



# splunk>

## tutorialspoint

SIMPLY EASY LEARNING

[www.tutorialspoint.com](http://www.tutorialspoint.com)



<https://www.facebook.com/tutorialspointindia>



<https://twitter.com/tutorialspoint>

## About the Tutorial

---

Splunk is a software used to search and analyze machine data. This machine data can come from web applications, sensors, devices or any data created by user. It serves the needs of IT infrastructure by analyzing the logs generated in various processes but it can also analyze any structured or semi-structured data with proper data modelling. It has built-in features to recognize the data types, field separators and optimize the search processes. It also provides data visualization on the search results.

## Audience

---

This tutorial targets IT professionals, students, and IT infrastructure management professionals who want a solid grasp of essential Splunk concepts. After completing this tutorial, you will achieve intermediate expertise in Splunk, and easily build on your knowledge to solve more challenging problems.

## Prerequisites

---

The reader should be familiar with querying language like SQL. General knowledge in typical operations in using computer applications like storing and retrieving data and reading the logs generated by computer programs will be an highly useful.

## Copyright & Disclaimer

---

© Copyright 2019 by Tutorials Point (I) Pvt. Ltd.

All the content and graphics published in this e-book are the property of Tutorials Point (I) Pvt. Ltd. The user of this e-book is prohibited to reuse, retain, copy, distribute or republish any contents or a part of contents of this e-book in any manner without written consent of the publisher.

We strive to update the contents of our website and tutorials as timely and as precisely as possible, however, the contents may contain inaccuracies or errors. Tutorials Point (I) Pvt. Ltd. provides no guarantee regarding the accuracy, timeliness or completeness of our website or its contents including this tutorial. If you discover any errors on our website or in this tutorial, please notify us at [contact@tutorialspoint.com](mailto:contact@tutorialspoint.com)

## Table of Contents

---

|                                         |           |
|-----------------------------------------|-----------|
| About the Tutorial .....                | ii        |
| Audience.....                           | ii        |
| Prerequisites.....                      | ii        |
| Copyright & Disclaimer .....            | ii        |
| Table of Contents .....                 | iii       |
| <b>1. Splunk – Overview .....</b>       | <b>1</b>  |
| Product Categories .....                | 1         |
| Splunk Features .....                   | 1         |
| <b>2. Splunk – Environment.....</b>     | <b>3</b>  |
| Linux Version .....                     | 3         |
| Windows Version.....                    | 6         |
| <b>3. Splunk – Interface .....</b>      | <b>9</b>  |
| Administrator Link .....                | 9         |
| Settings Link.....                      | 10        |
| Search and Reporting Link .....         | 11        |
| <b>4. Splunk – Data Ingestion .....</b> | <b>13</b> |
| Selecting Source Type.....              | 14        |
| Input Settings .....                    | 15        |
| Review Settings .....                   | 17        |
| <b>5. Splunk – Source Types.....</b>    | <b>19</b> |
| Supported Source Types.....             | 19        |
| Source Type Sub-Category.....           | 20        |
| Pre-Trained Source Types.....           | 21        |
| <b>6. Splunk – Basic Search.....</b>    | <b>22</b> |
| Combining Search Terms.....             | 23        |
| Using Wild Card .....                   | 24        |

|                                                |           |
|------------------------------------------------|-----------|
| Refining Search Results .....                  | 25        |
| <b>7. Splunk – Field Searching.....</b>        | <b>27</b> |
| Choosing the Fields.....                       | 28        |
| Field Summary .....                            | 29        |
| Using Fields in Search .....                   | 30        |
| <b>8. Splunk – Time Range Search .....</b>     | <b>31</b> |
| Selecting a Time Subset.....                   | 32        |
| Earliest and Latest .....                      | 33        |
| <b>9. Splunk – Sharing Exporting .....</b>     | <b>35</b> |
| Sharing the Search Result.....                 | 35        |
| Finding the Saved Results.....                 | 36        |
| Exporting the Search Result .....              | 37        |
| <b>10. Splunk – Search Language .....</b>      | <b>39</b> |
| Components of SPL.....                         | 39        |
| <b>11. Splunk – Search Optimization .....</b>  | <b>44</b> |
| Analysing Search Optimisations .....           | 44        |
| Turning Off Optimization.....                  | 46        |
| <b>12. Splunk – Transforming Commands.....</b> | <b>49</b> |
| Examples of Transforming Commands.....         | 49        |
| <b>13. Splunk – Reports.....</b>               | <b>53</b> |
| Report Creation .....                          | 53        |
| Report Configuration.....                      | 54        |
| Modifying Report Search Option .....           | 56        |
| <b>14. Splunk – Dashboards.....</b>            | <b>58</b> |
| Creating Dashboard.....                        | 58        |
| Adding Panel to Dashboard .....                | 60        |
| <b>15. Splunk – Pivot and Datasets.....</b>    | <b>64</b> |

|                                               |            |
|-----------------------------------------------|------------|
| Creating a Dataset .....                      | 64         |
| Selecting a Dataset .....                     | 64         |
| Choosing Dataset Fields.....                  | 65         |
| Creating Pivot .....                          | 67         |
| Choose the Pivot Fields .....                 | 68         |
| <b>16. Splunk – Lookups .....</b>             | <b>70</b>  |
| Steps to Create and Use Lookup File .....     | 70         |
| <b>17. Splunk – Schedules and Alerts.....</b> | <b>77</b>  |
| Creating a Schedule .....                     | 77         |
| Schedule Actions .....                        | 79         |
| Alerts .....                                  | 79         |
| <b>18. Splunk – Knowledge Management.....</b> | <b>84</b>  |
| Knowledge Object .....                        | 84         |
| Uses of Knowledge Objects .....               | 84         |
| <b>19. Splunk – Subsearching .....</b>        | <b>86</b>  |
| Example .....                                 | 86         |
| <b>20. Splunk – Search Macros .....</b>       | <b>89</b>  |
| Macro Creation.....                           | 89         |
| Macro Scenario.....                           | 90         |
| Defining the Macro.....                       | 90         |
| Using the Macro .....                         | 92         |
| <b>21. Splunk – Event Types .....</b>         | <b>94</b>  |
| Creating Event Type.....                      | 94         |
| Using New Event Types .....                   | 96         |
| Viewing the Event Type .....                  | 98         |
| Using the Event Type.....                     | 100        |
| <b>22. Splunk – Basic Chart.....</b>          | <b>101</b> |

|                                             |            |
|---------------------------------------------|------------|
| Creating Charts .....                       | 102        |
| Changing the Chart Type .....               | 103        |
| Formatting a Chart .....                    | 104        |
| <b>23. Splunk – Overlay Chart.....</b>      | <b>105</b> |
| Chart Scenario .....                        | 105        |
| Creating Chart Overlay .....                | 107        |
| <b>24. Splunk – Sparklines .....</b>        | <b>110</b> |
| Selecting the Fields .....                  | 110        |
| Creating the Sparkline .....                | 111        |
| Changing the Time Period .....              | 112        |
| <b>25. Splunk – Managing Indexes.....</b>   | <b>113</b> |
| Checking Indexes .....                      | 113        |
| Creating a New Index .....                  | 115        |
| Indexing the Events .....                   | 116        |
| <b>26. Splunk – Calculated Fields .....</b> | <b>118</b> |
| Example .....                               | 118        |
| Using the eval Function .....               | 119        |
| Adding New Fields .....                     | 120        |
| Displaying the calculated Fields.....       | 120        |
| <b>27. Splunk – Tags .....</b>              | <b>122</b> |
| Creating Tags .....                         | 123        |
| Search Using Tags .....                     | 124        |
| <b>28. Splunk – Apps .....</b>              | <b>126</b> |
| Listing Splunk Apps .....                   | 126        |
| App Permissions .....                       | 127        |
| App Marketplace .....                       | 128        |
| <b>29. Splunk – Removing Data .....</b>     | <b>130</b> |

|                                          |            |
|------------------------------------------|------------|
| Assigning Delete Privilege.....          | 130        |
| Identifying the data to be removed ..... | 131        |
| Deleting the Selected Data .....         | 132        |
| <b>30. Splunk – Custom Chart.....</b>    | <b>135</b> |
| Axis Customization .....                 | 136        |
| Legend Customization .....               | 136        |
| <b>31. Splunk – Monitor Files .....</b>  | <b>138</b> |
| Add files to Monitor .....               | 138        |
| <b>32. Splunk – Sort Command.....</b>    | <b>142</b> |
| Sorting by Field Types.....              | 142        |
| Sorting up to a Limit .....              | 143        |
| Using Reverse .....                      | 145        |
| <b>33. Splunk – Top Command .....</b>    | <b>146</b> |
| Top Values for a Field .....             | 146        |
| Top Values for a Field by a Field .....  | 147        |
| Show Options .....                       | 148        |
| <b>34. Splunk – Stats Command .....</b>  | <b>149</b> |
| Finding Average .....                    | 149        |
| Finding Range .....                      | 150        |
| Finding Mean and Variance.....           | 151        |

# 1. Splunk – Overview

Splunk is a software which processes and brings out insight from machine data and other forms of big data. This machine data is generated by CPU running a webserver, IOT devices, logs from mobile apps, etc. It is not necessary to provide this data to the end users and does not have any business meaning. However, they are extremely important to understand, monitor and optimize the performance of the machines.

Splunk can read this unstructured, semi-structured or rarely structured data. After reading the data, it allows to search, tag, create reports and dashboards on these data. With the advent of big data, Splunk is now able to ingest big data from various sources, which may or may not be machine data and run analytics on big data.

So, from a simple tool for log analysis, Splunk has come a long way to become a general analytical tool for unstructured machine data and various forms of big data.

## Product Categories

---

Splunk is available in three different product categories as follows:

- **Splunk Enterprise:** It is used by companies which have large IT infrastructure and IT driven business. It helps in gathering and analysing the data from websites, applications, devices and sensors, etc.
- **Splunk Cloud:** It is the cloud hosted platform with same features as the enterprise version. It can be availed from Splunk itself or through the AWS cloud platform.
- **Splunk Light:** It allows search, report and alert on all the log data in real time from one place. It has limited functionalities and features as compared to the other two versions.

## Splunk Features

---

In this section, we shall discuss the important features of enterprise edition:

### Data Ingestion

Splunk can ingest a variety of data formats: JSON, XML and unstructured machine data such as web and application logs. The unstructured data can be modeled into a data structure by the user as and when needed.

### Data Indexing

The ingested data is indexed by Splunk for faster searching and querying on different conditions.

## Data Searching

Searching in Splunk involves using the indexed data for the purpose of creating metrics, predicting future trends and identifying patterns in the data.

## Using Alerts

Splunk alerts can be used to trigger emails or RSS feeds when some specific criteria are found in the data being analyzed.

## Dashboards

Splunk Dashboards can show the search results in the form of charts, reports and pivots, etc.

## Data Model

The indexed data can be modelled into one or more data sets that is based on specialized domain knowledge. This leads to easier navigation by the end users who analyze the business cases without learning the technicalities of the search processing language used by Splunk.

## 2. Splunk – Environment

In this tutorial, we will aim to install the enterprise version. This version is available for a free evaluation for 60 days with all features enabled. You can download the setup using the below link which is available for both windows and Linux platforms.

[https://www.splunk.com/en\\_us/download/splunk-enterprise.html](https://www.splunk.com/en_us/download/splunk-enterprise.html).


### Linux Version

The Linux version is downloaded from the download link given above. We choose the .deb package type as the installation will be done in a Ubuntu platform.

We shall learn this with a step by step approach:

#### Step 1

Download the .deb package as shown in the screenshot below:

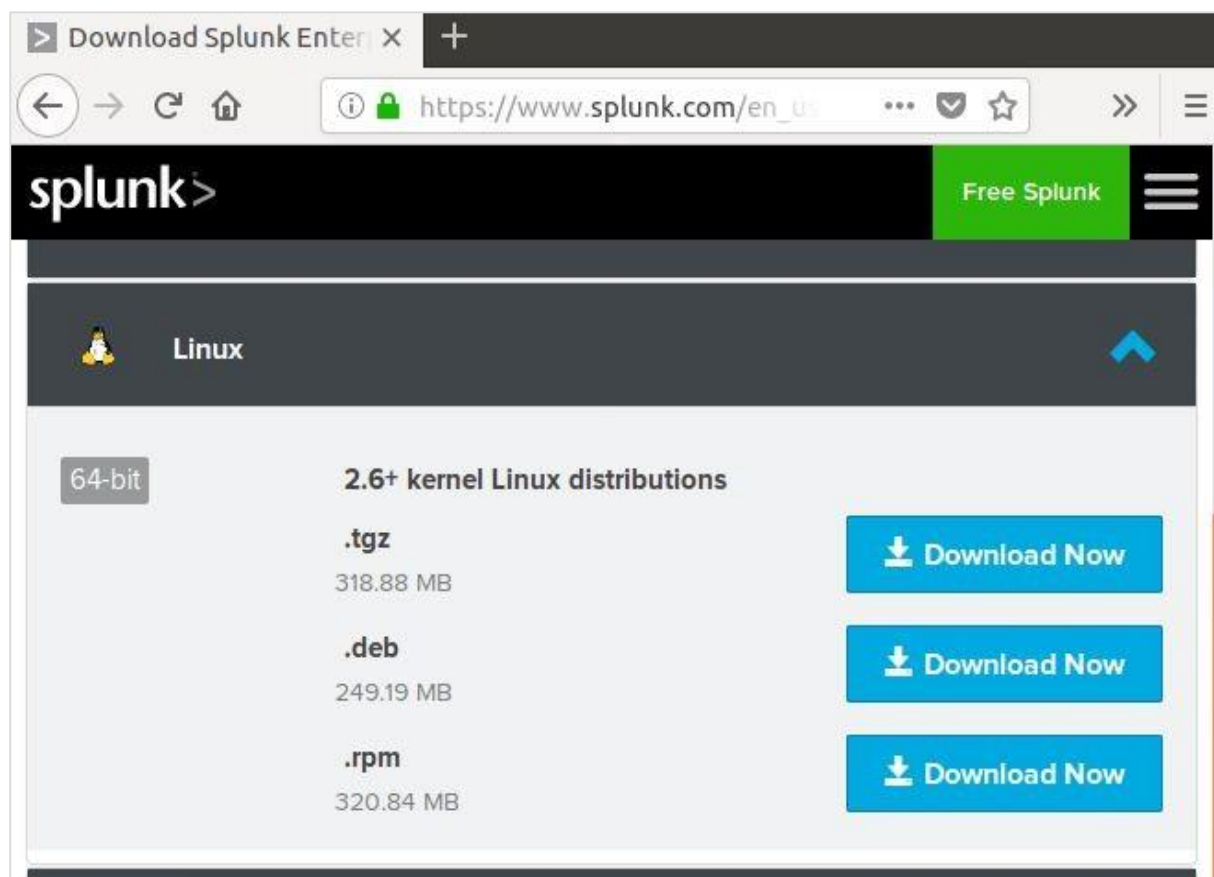

## Step 2

Go to the download directory and install Splunk using the above downloaded package.

```
ubuntutrain@ubuntu: ~/Downloads
ubuntutrain@ubuntu:~/Downloads$ ls
splunk-7.2.0-8c86330ac18-linux-2.6-amd64.deb
ubuntutrain@ubuntu:~/Downloads$ sudo dpkg -i splunk-7.2.0-8c86330ac18-
linux-2.6-amd64.deb
[sudo] password for ubuntutrain:
Selecting previously unselected package splunk.
(Reading database ... 176940 files and directories currently installed.)
Preparing to unpack splunk-7.2.0-8c86330ac18-linux-2.6-amd64.deb ...
Unpacking splunk (7.2.0) ...
Setting up splunk (7.2.0) ...
complete
ubuntutrain@ubuntu:~/Downloads$
```

## Step 3

Next, you can start Splunk by using the following command with accept license argument. It will ask for administrator user name and password which you should provide and remember.

```
ubuntutrain@ubuntu:/opt/splunk/bin$ sudo ./splunk start --accept-li
cense

This appears to be your first time running this version of Splunk.

Splunk software must create an administrator account during startup
. Otherwise, you cannot log in.
Create credentials for the administrator account.
Characters do not appear on the screen when you type in credentials
.

Please enter an administrator username: admin
Password must contain at least:
* 8 total printable ASCII character(s).
Please enter a new password:
```

## Step 4

The Splunk server starts and mentions the URL where the Splunk interface can be accessed.

```

Starting splunk server daemon (splunkd)...
Generating a 2048 bit RSA private key
...++++
.....++++
writing new private key to 'privKeySecure.pem'
-----
Signature ok
subject=/CN=ubuntu/O=SplunkUser
Getting CA Private Key
writing RSA key
Done

Waiting for web server at http://127.0.0.1:8000 to be available....
..... Done

If you get stuck, we're here to help.
Look for answers here: http://docs.splunk.com

The Splunk web interface is at http://ubuntu:8000

```


## Step 5

Now, you can access the Splunk URL and enter the admin user ID and password created in step 3.

The screenshot shows a web browser window with the title 'Login | Splunk'. The address bar displays 'ubuntu:8000/en-US/account'. The main content area features a login form with two input fields: the first contains the username 'admin', and the second is for the password, shown as a series of dots. Below these fields is a green 'Sign In' button. Underneath the button, a message reads: 'First time signing in? If you installed this instance, use the username and password you created at installation. Otherwise, use the username and password that your Splunk administrator gave you. If you've forgotten your credentials, contact your Splunk administrator.'

## Windows Version

The windows version is available as a msi installer as shown in the below image:

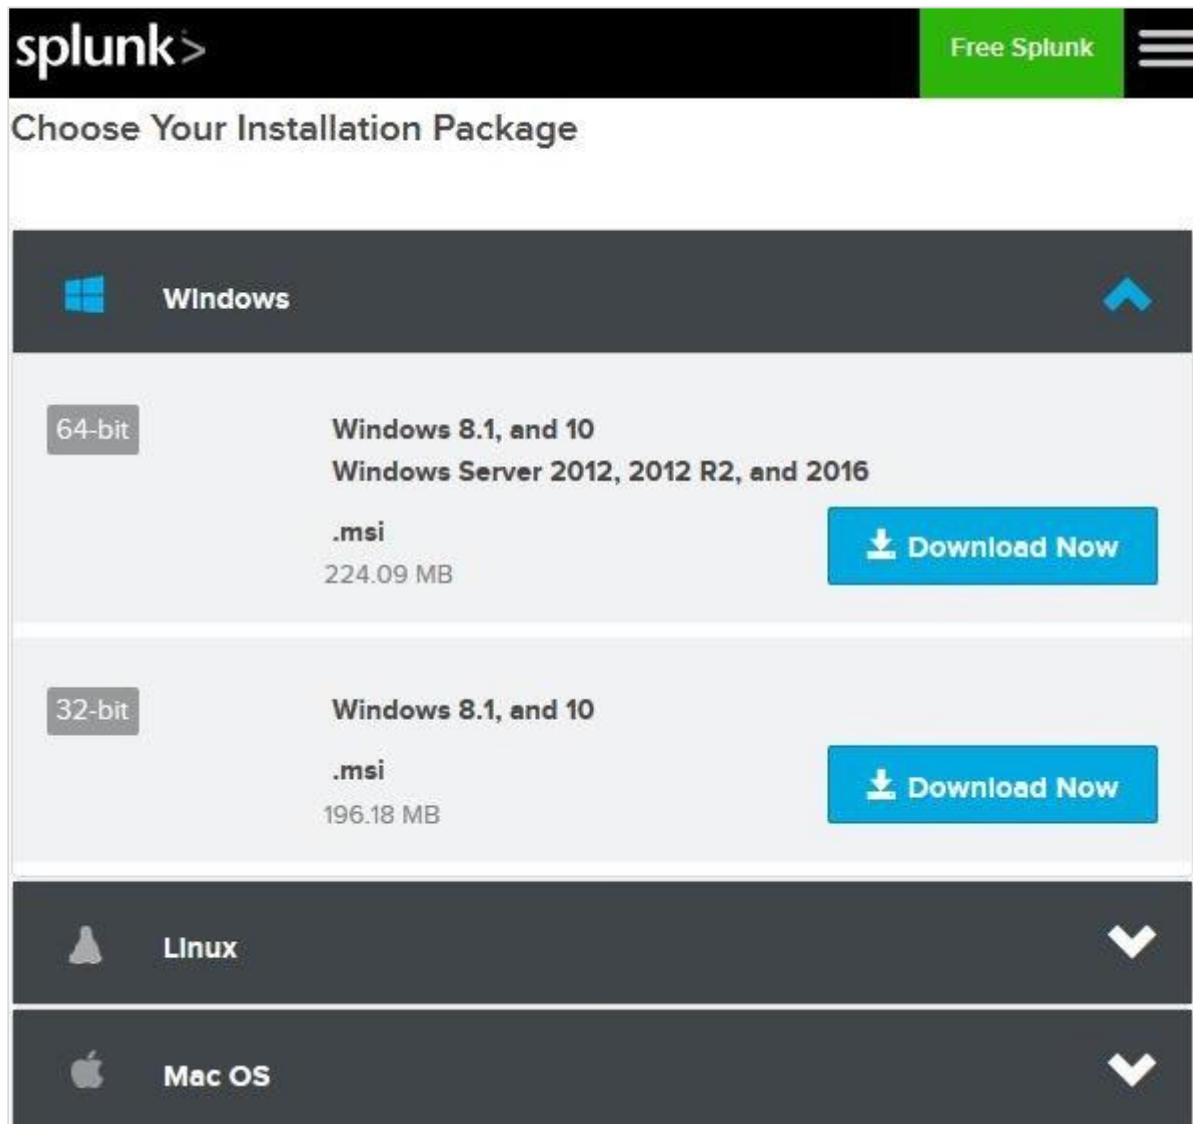

Double clicking on the msi installer installs the Windows version in a straight forward process. The two important steps where we must make the right choice for successful installation are as follows.


### Step 1

As we are installing it on a local system, choose the local system option as given below:




## Step 2

Enter the password for the administrator and remember it, as it will be used in the future configurations.

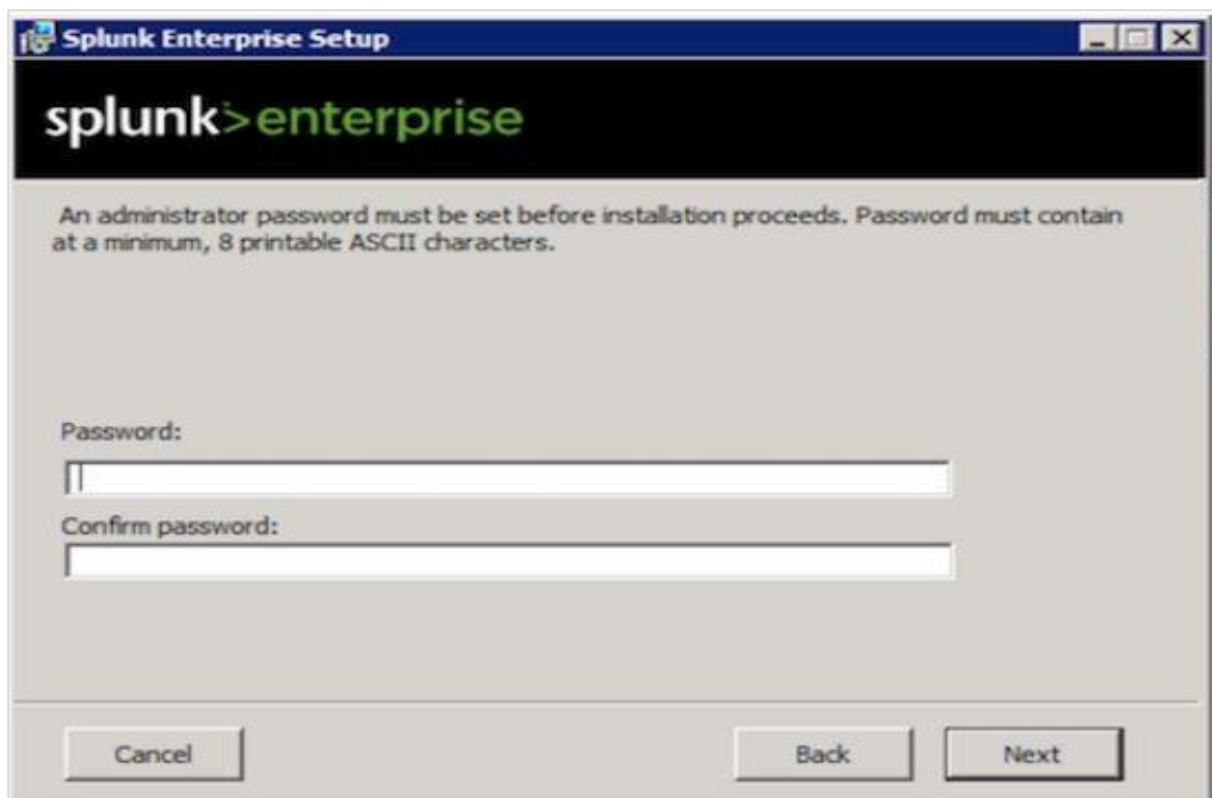


### Step 3

In the final step, we see that Splunk is successfully installed and it can be launched from the web browser.

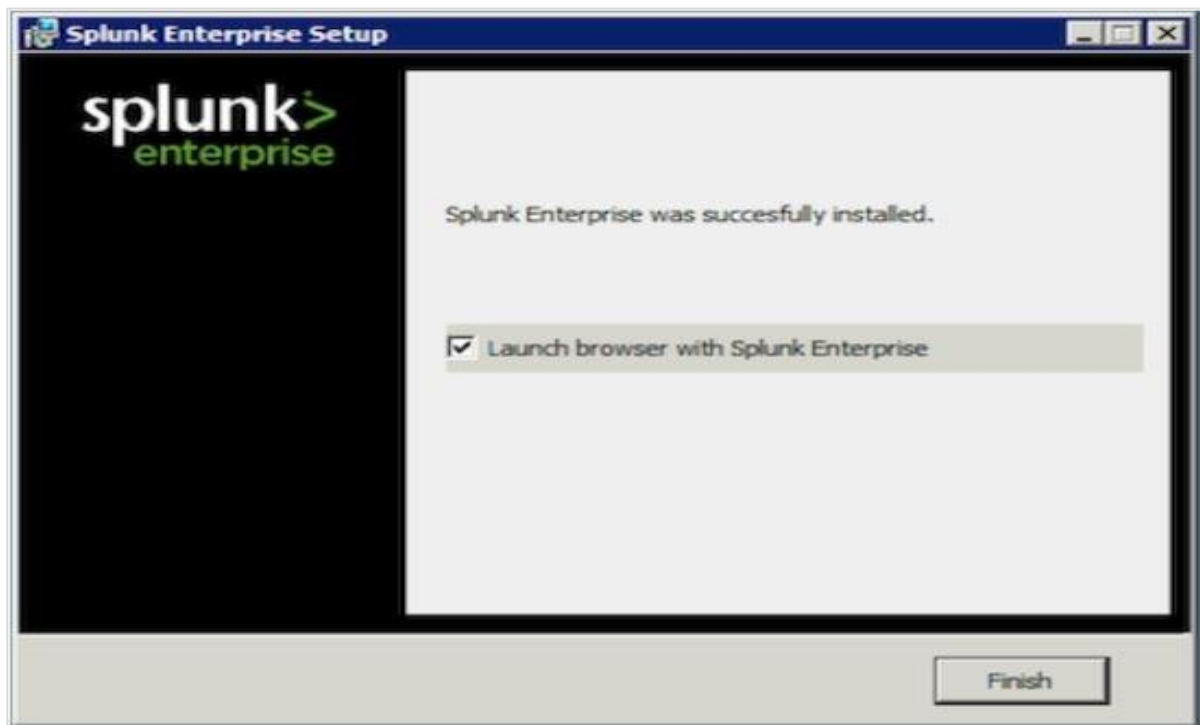

### Step 4


Next, open the browser and enter the given url, <http://localhost:8000>, and login to the Splunk using the admin user ID and password.

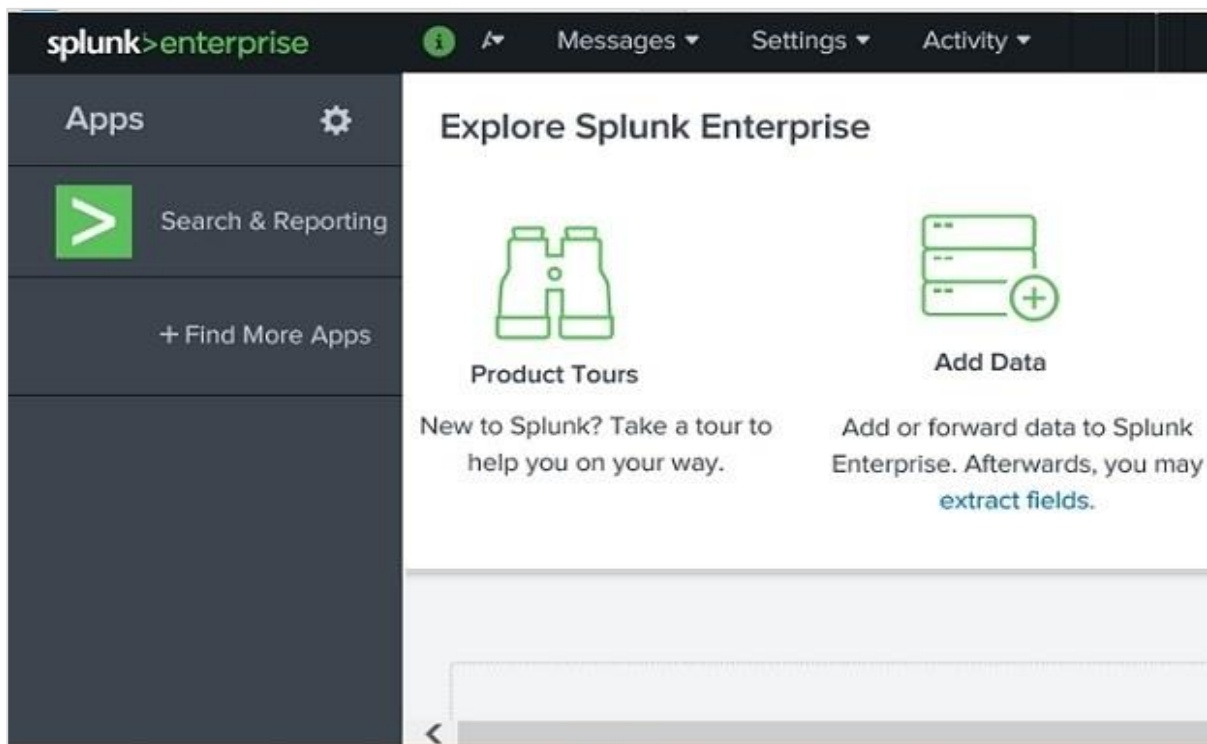

### 3. Splunk – Interface

The Splunk web interface consists of all the tools you need to search, report and analyse the data that is ingested. The same web interface provides features for administering the users and their roles. It also provides links for data ingestion and the in-built apps available in Splunk.

The below picture shows the initial screen after your login to Splunk with the admin credentials.

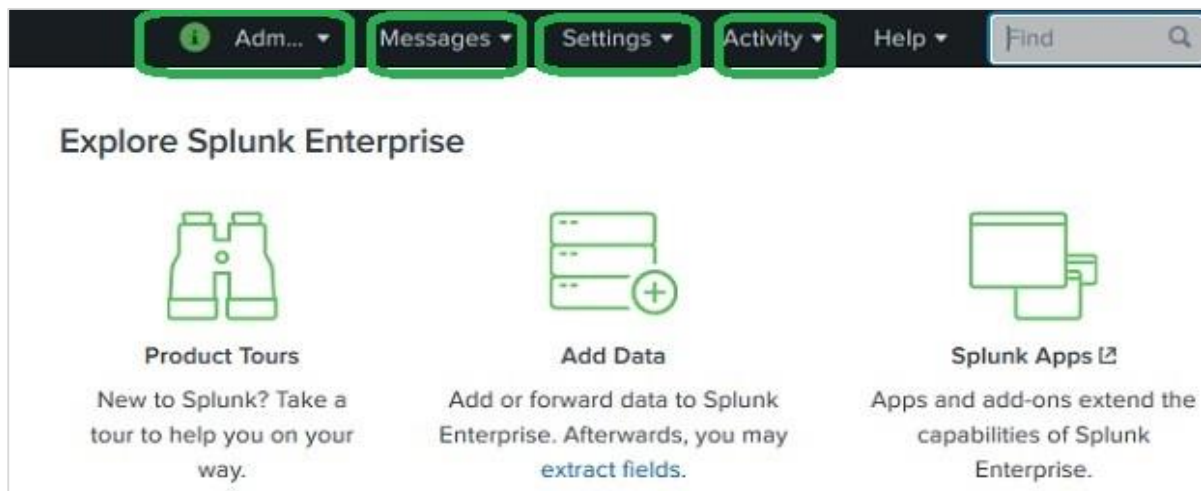


#### Administrator Link

The Administrator drop down gives the option to set and edit the details of the administrator. We can reset the admin email ID and password using the below screen:

The image shows the 'Personal' settings page for the administrator. It contains several input fields for user information: 'Full name' (filled with 'Administrator'), 'Email address' (filled with 'changeme@example.com'), 'Old password', 'Set password' (with a sub-field for 'New password'), and 'Confirm password' (with a sub-field for 'Confirm new password'). Below these fields is a password requirement note: 'Password must contain at least 8 characters'. A green 'Save' button is located at the bottom right of the form.

Further from the administrator link, we can also navigate to the preferences option where we can set the time zone and home application on which the landing page will open after your login. Currently, it opened on the Home page as shown below:

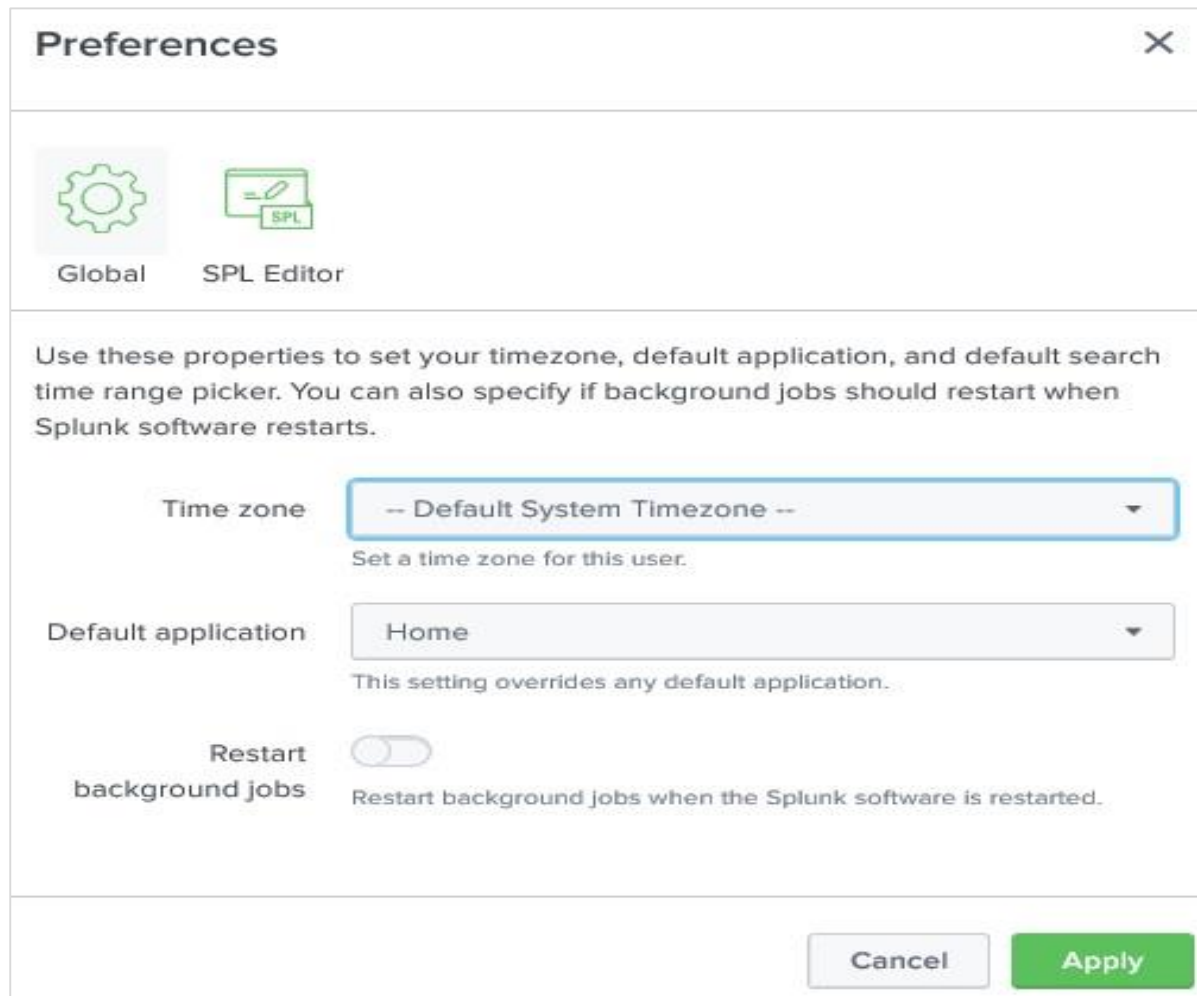


The screenshot shows the 'Preferences' dialog box in Splunk. At the top, there are two tabs: 'Global' (selected, with a gear icon) and 'SPL Editor' (with a notepad icon). Below the tabs, a text block explains: 'Use these properties to set your timezone, default application, and default search time range picker. You can also specify if background jobs should restart when Splunk software restarts.' There are three settings: 1. 'Time zone' with a dropdown menu showing '-- Default System Timezone --' and a subtext 'Set a time zone for this user.' 2. 'Default application' with a dropdown menu showing 'Home' and a subtext 'This setting overrides any default application.' 3. 'Restart background jobs' with a toggle switch that is currently turned off and a subtext 'Restart background jobs when the Splunk software is restarted.' At the bottom right, there are two buttons: 'Cancel' and 'Apply'.

## Settings Link


This is a link which shows all the core features available in Splunk. For example, you can add the lookup files and lookup definitions by choosing the lookup link.

We will discuss the important settings of these links in the subsequent chapters.

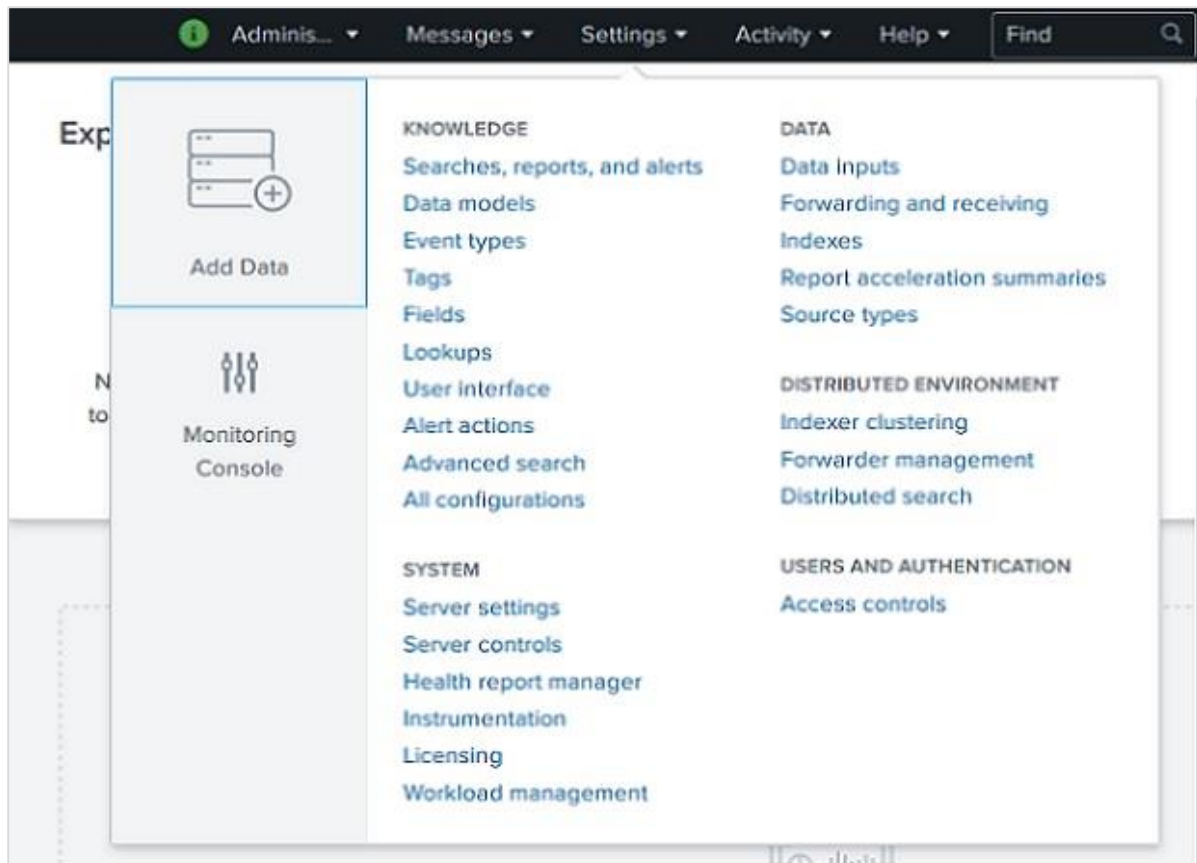

## Search and Reporting Link

The search and reporting link takes us to the features where we can find the data sets that are available for searching the reports and alerts created for these searches. It is clearly shown in the below screenshot:

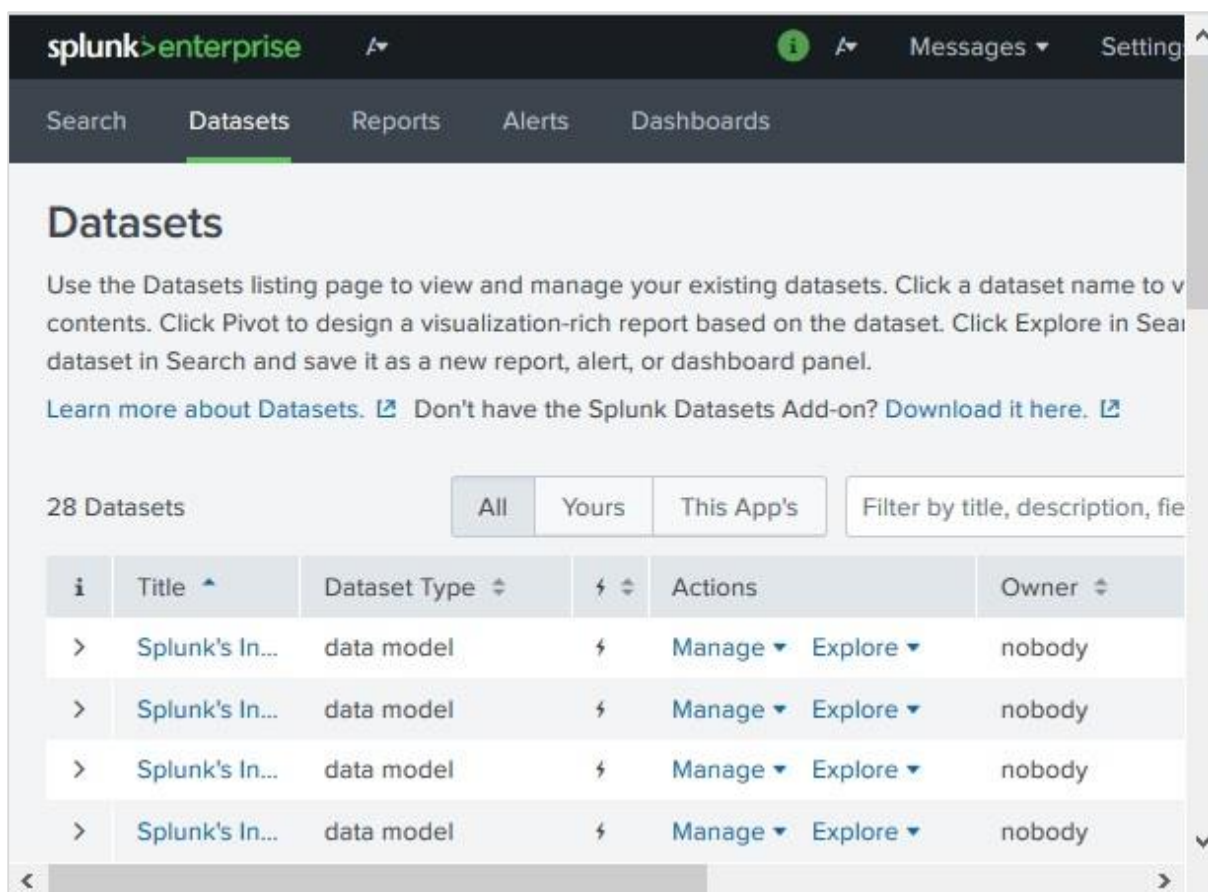

**splunk>enterprise** Messages Settings

**Datasets** | Search | Reports | Alerts | Dashboards

## Datasets

Use the Datasets listing page to view and manage your existing datasets. Click a dataset name to view its contents. Click Pivot to design a visualization-rich report based on the dataset. Click Explore in Search to create a new report, alert, or dashboard panel.

[Learn more about Datasets.](#) [Don't have the Splunk Datasets Add-on? Download it here.](#)


28 Datasets

All Yours This App's

| i | Title          | Dataset Type |   | Actions                                        | Owner  |
|---|----------------|--------------|---|------------------------------------------------|--------|
| > | Splunk's In... | data model   | ⚡ | <a href="#">Manage</a> <a href="#">Explore</a> | nobody |
| > | Splunk's In... | data model   | ⚡ | <a href="#">Manage</a> <a href="#">Explore</a> | nobody |
| > | Splunk's In... | data model   | ⚡ | <a href="#">Manage</a> <a href="#">Explore</a> | nobody |
| > | Splunk's In... | data model   | ⚡ | <a href="#">Manage</a> <a href="#">Explore</a> | nobody |

## 4. Splunk – Data Ingestion

Data ingestion in Splunk happens through the **Add Data** feature which is part of the search and reporting app. After logging in, the Splunk interface home screen shows the **Add Data** icon as shown below.

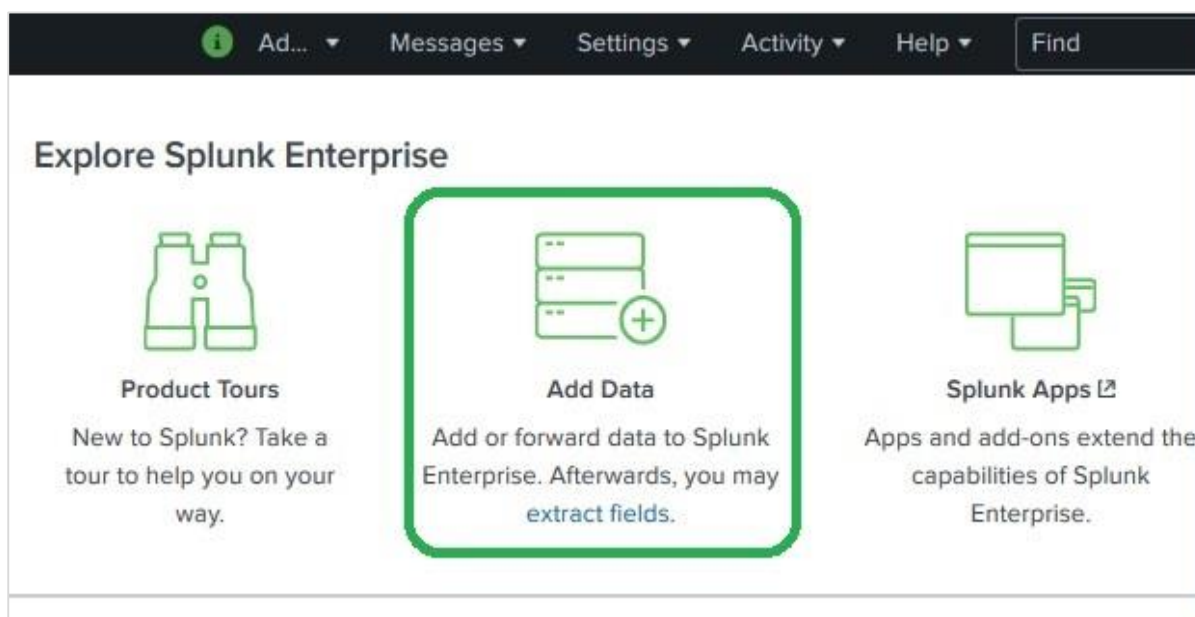

On clicking this button, we are presented with the screen to select the source and format of the data we plan to push to Splunk for analysis.

### Gathering The Data

We can get the data for analysis from the Official Website of Splunk. Save this file and unzip it in your local drive. On opening the folder, you can find three files which have different formats. They are the log data generated by some web apps. We can also gather another set of data provided by Splunk which is available at from the Official Splunk webpage.

We will use data from both these sets for understanding the working of various features of Splunk.

### Uploading data

Next, we choose the file, **secure.log** from the folder, **mailsv** which we have kept in our local system as mentioned in the previous paragraph. After selecting the file, we move to next step using the green coloured next button in the top right corner.

The screenshot displays the 'Add Data' workflow in Splunk. At the top, a progress bar shows five steps: 'Add Data', 'Select Source', 'Set Source Type', 'Input Settings', 'Review', and 'Done'. The 'Select Source' step is currently active, indicated by a green dot. Below the progress bar, the 'Select Source' section prompts the user to 'Choose a file to upload to the Splunk platform, either by browsing your computer or by dropping a file'. It shows a 'Selected File: secure.log' and a 'Select File' button. A large dashed box below this contains the text 'Drop your data file here' and 'The maximum file upload size is 500 Mb'. At the bottom of the interface is a 'Done' button.

## Selecting Source Type

Splunk has an in-built feature to detect the type of the data being ingested. It also gives the user an option to choose a different data type than the chosen by Splunk. On clicking the source type drop down, we can see various data types that Splunk can ingest and enable for searching.

In the current example given below, we choose the default source type.

**Add Data**

Select Source   Set Source Type   Input Settings   Review   Done

## Set Source Type

This page lets you see how the Splunk platform sees your data before indexing. If the events look correct, click "Next" to proceed. If not, use the options below to define proper event breaks and timestamps. If you cannot identify the source of your data, create a new one by clicking "Save As".

Source: **secure.log**

Source type: default ▾ Save As

Search for source types:

- ✓ Default Settings  
Splunk's default source type settings
- Application
- Database
- Email
- Metrics
- Miscellaneous
- Network & Security
- Operating System
- Structured
- Uncategorized
- Web

List ▾   Format   20 Per Page

< Prev   1   2   3

|   | Time                       | Event |
|---|----------------------------|-------|
| 1 | 10/8/18<br>12:15:05.000 AM | ...   |
| 2 | 10/8/18<br>12:15:05.000 AM | ...   |
| 3 | 10/8/18<br>12:15:05.000 AM | ...   |
| 4 | 10/8/18<br>12:15:05.000 AM | ...   |
| 5 | 10/8/18<br>12:15:05.000 AM | ...   |

## Input Settings

In this step of data ingestion, we configure the host name from which the data is being ingested. Following are the options to choose from, for the host name:

### Constant value

It is the complete host name where the source data resides.

### regex on path

When you want to extract the host name with a regular expression, enter the regex for in the regular expression field.

## segment in path

When you want to extract the host name from a segment in your data source's path, enter the segment number in the Segment number field. For example, if the path to the source is **/var/log/** and you want the third segment (the host server name) to be the host value, enter "3".

Next, we choose the index type to be created on the input data for searching. We choose the default index strategy. The summary index only creates summary of the data through aggregation and creates index on it while the history index is for storing the search history. It is clearly depicted in the image below:

ers for this data input as follows:

a, each event receives a  
the name of the machine  
pe of input you choose  
options. [Learn More](#)

☒ Constant value  
☐ Regular expression on path  
☐ Segment in path

Host field value

ata as events in the  
box" index as a  
mining a source type for  
ubleshoot your  
ction indexes. You can  
[More](#)


Index **Default** Create a new index

- ✓ Default
- history
- main
- summary

e multiple indexes?

## Review Settings

After clicking on the next button, we see a summary of the settings we have chosen. We review it and choose Next to finish the uploading of data.

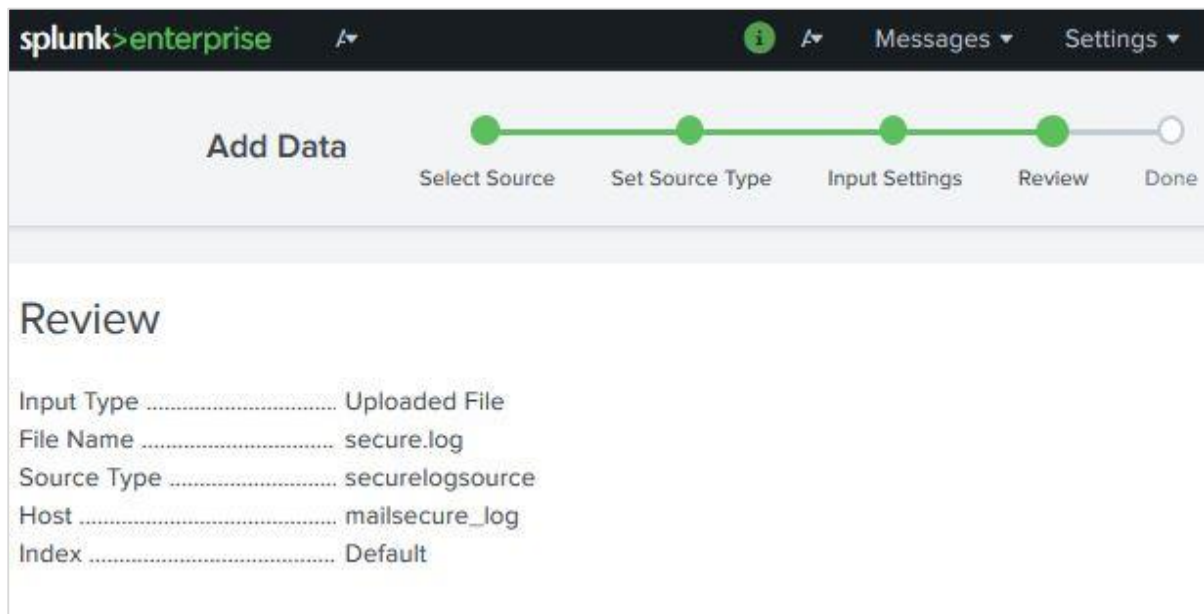

The screenshot shows the Splunk Enterprise interface. At the top, there's a navigation bar with 'splunk>enterprise', a search icon, an information icon, and dropdown menus for 'Messages' and 'Settings'. Below this is a progress bar with five steps: 'Add Data', 'Select Source', 'Set Source Type', 'Input Settings', 'Review', and 'Done'. The 'Review' step is currently active, indicated by a green dot. The main content area is titled 'Review' and displays the following configuration details:

|                   |                 |
|-------------------|-----------------|
| Input Type .....  | Uploaded File   |
| File Name .....   | secure.log      |
| Source Type ..... | securelogsource |
| Host .....        | mailsecure_log  |
| Index .....       | Default         |

On finishing the load, the below screen appears which shows the successful data ingestion and further possible actions we can take on the data.

## Add Data

✓

Select SourceSet Source TypeInput SettingsReviewDone

### File has been uploaded successfully.

Configure your inputs by going to [Settings > Data Inputs](#)

Start Searching

Search your data now or see [examples and tutorials](#). [🔗](#)

Extract Fields

Create search-time field extractions. [Learn more about fields](#). [🔗](#)

Add More Data

Add more data inputs now or see [examples and tutorials](#). [🔗](#)

Download Apps

Apps help you do more with your data. [Learn more](#). [🔗](#)

Build Dashboards

Visualize your searches. [Learn more](#). [🔗](#)

## 5. Splunk – Source Types

All the incoming data to Splunk are first judged by its inbuilt data processing unit and classified to certain data types and categories. For example, if it is a log from apache web server, Splunk is able to recognize that and create appropriate fields out of the data read.

This feature in Splunk is called source type detection and it uses its built-in source types that are known as "pretrained" source types to achieve this.

This makes things easier for analysis as the user does not have to manually classify the data and assign any data types to the fields of the incoming data.

### Supported Source Types

The supported source types in Splunk can be seen by uploading a file through the **Add Data** feature and then selecting the dropdown for Source Type. In the below image, we have uploaded a CSV file and then checked for all the available options.

The screenshot displays the 'Set Source Type' page in the Splunk interface. At the top, the 'Add Data' section shows a progress bar with 'Set Source Type' as the current step. Below this, the page title 'Set Source Type' is followed by an explanatory paragraph. The source is identified as 'prodcutidvals.csv'. A dropdown menu for 'Source type: csv' is open, listing various categories: Default Settings, Application, Custom, Database, Email, Metrics, Miscellaneous, Network & Security, Operating System, Structured, Uncategorized, and Web. To the right, a table displays event data with columns for ID, status, and timestamp.

| ID | Status  | Timestamp      |
|----|---------|----------------|
| 1  | Warning | 11/23/12:05:12 |
| 2  | Warning | 11/23/12:05:12 |
| 3  | Warning | 11/23/12:05:12 |
| 4  | Warning | 11/23/12:05:12 |
| 5  | Warning | 11/23/12:05:12 |
| 6  | Warning | 11/23/12:05:12 |
| 7  | Warning | 11/23/12:05:12 |
| 8  | Warning | 11/23/12:05:12 |

## Source Type Sub-Category

Even in those categories, we can further click to see all the sub categories that are supported. So when you choose the database category, you can find the different types of databases and their supported files which Splunk can recognize.

**splunk>enterprise** Messages

**Add Data**

Select Source Set Source Type Input Settings Re

### Set Source Type

This page lets you see how the Splunk platform sees your data before indexing. If the even "Next" to proceed. If not, use the options below to define proper event breaks and timestar your data, create a new one by clicking "Save As".

Source: **prodcutidvals.csv**

Source type: csv ▼

filter

- Default Settings  
Splunk's default source type settings
- Application
- Custom
- Database**
- Email
- Metrics
- Miscellaneous
- Network & Security
- Operating System
- Structured
- Uncategorized
- Web

- db\_auditcsv
- postgresql log
- mysql\_slow  
Slow query log output produced by the MySQL database server
- mysql  
Output produced by the MySQL database server
- mysql\_bin  
Binary log output produced by the MySQL database server
- mysql\_error

|   |   |               |
|---|---|---------------|
| 4 | ⚠ | 11/23/12:05:1 |
| 5 | ⚠ | 11/23/12:05:1 |
| 6 | ⚠ | 11/23/12:05:1 |
| 7 | ⚠ | 11/23/12:05:1 |
| 8 | ⚠ | 11/23/12:05:1 |

## Pre-Trained Source Types


---

The below table lists some of the important pre-trained source types Splunk recognizes:

| Source Type Name        | Nature                                                                                                                      |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| access_combined         | NCSA combined format http web server logs (can be generated by apache or other web servers)                                 |
| access_combined_wcookie | NCSA combined format http web server logs (can be generated by apache or other web servers), with cookie field added at end |
| apache_error            | Standard Apache web server error log                                                                                        |
| linux_messages_syslog   | Standard linux syslog (/var/log/messages on most platforms)                                                                 |
| log4j                   | Log4j standard output produced by any J2EE server using log4j                                                               |
| mysqld_error            | Standard mysql error log                                                                                                    |


## 6. Splunk – Basic Search

Splunk has a robust search functionality which enables you to search the entire data set that is ingested. This feature is accessed through the app named as **Search & Reporting** which can be seen in the left side bar after logging in to the web interface.

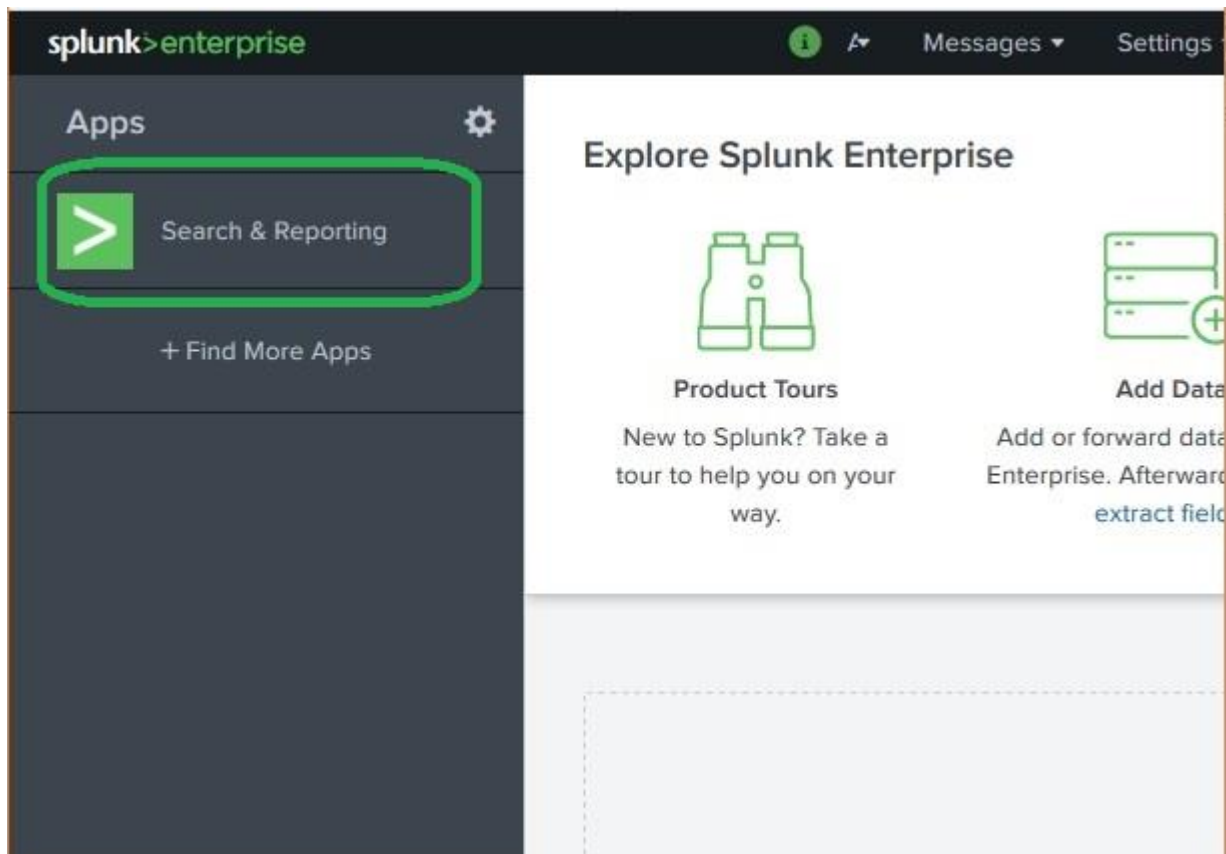

On clicking on the **search & Reporting** app, we are presented with a search box, where we can start our search on the log data that we uploaded in the previous chapter.

We type the host name in the format as shown below and click on the search icon present in the right most corner. This gives us the result highlighting the search term.

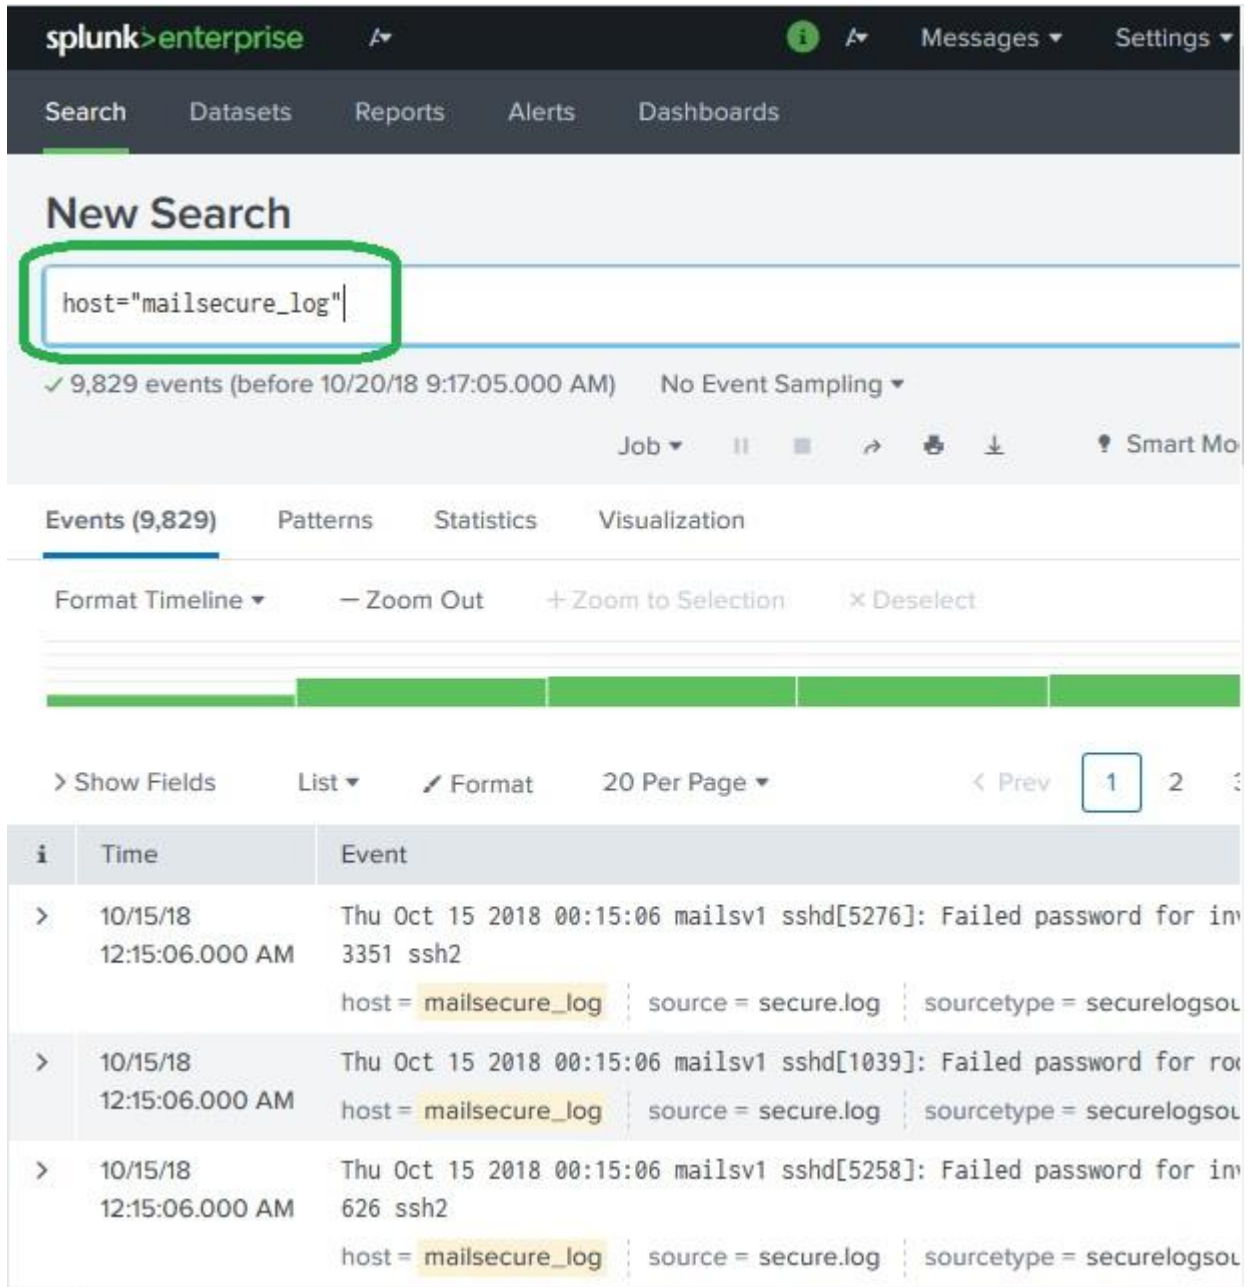

**splunk>enterprise** Messages Settings

Search Datasets Reports Alerts Dashboards

## New Search

`host="mailsecure_log"`

✓ 9,829 events (before 10/20/18 9:17:05.000 AM) No Event Sampling ▾

Job ▾ || [ ] ↻ [ ] [ ] [ ] Smart Mo

Events (9,829) Patterns Statistics Visualization

Format Timeline ▾ — Zoom Out + Zoom to Selection × Deselect

> Show Fields List ▾ / Format 20 Per Page ▾ < Prev 1 2 3

| i | Time                        | Event                                                                                                                                                      |
|---|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password for im<br>3351 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securelogso |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[1039]: Failed password for ro<br>host = mailsecure_log   source = secure.log   sourcetype = securelogso              |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5258]: Failed password for im<br>626 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securelogso  |

## Combining Search Terms

We can combine the terms used for searching by writing them one after another but putting the user search strings under double quotes.

The screenshot shows the Splunk Enterprise web interface. At the top, the navigation bar includes 'splunk>enterprise', a search icon, 'Messages', and 'Settings'. Below this is a secondary navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'Search' tab is active, leading to the 'New Search' page.

The search query entered is: `source="secure.log" host="mailsecure_log" sourcetype="securelogsource"`. Below the query bar, it indicates '9,829 events (before 10/20/18 9:30:24.000 AM)' and 'No Event Sampling'. There are icons for job management, pausing, and downloading.


Below the search bar, there are tabs for 'Events (9,829)', 'Patterns', 'Statistics', and 'Visualization'. The 'Events' tab is selected. Below these tabs are controls for 'Format Timeline', 'Zoom Out', 'Zoom to Selection', and 'Deselect'.

At the bottom of the search results area, there are links for '> Show Fields', 'List', 'Format', and '20 Per Page'. There are also navigation links for '< Prev', '1' (selected), '2', and '3'.

| i | Time                        | Event                                                                                                                                                          |
|---|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password for im<br>3351 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securelogsource |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[1039]: Failed password for ro<br>host = mailsecure_log   source = secure.log   sourcetype = securelogsource              |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5258]: Failed password for im<br>626 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securelogsource  |

## Using Wild Card

We can use wild cards in our search option combined with the **AND/OR** operators. In the below search, we get the result where the log file has the terms containing fail, failed, failure, etc., along with the term password in the same line.

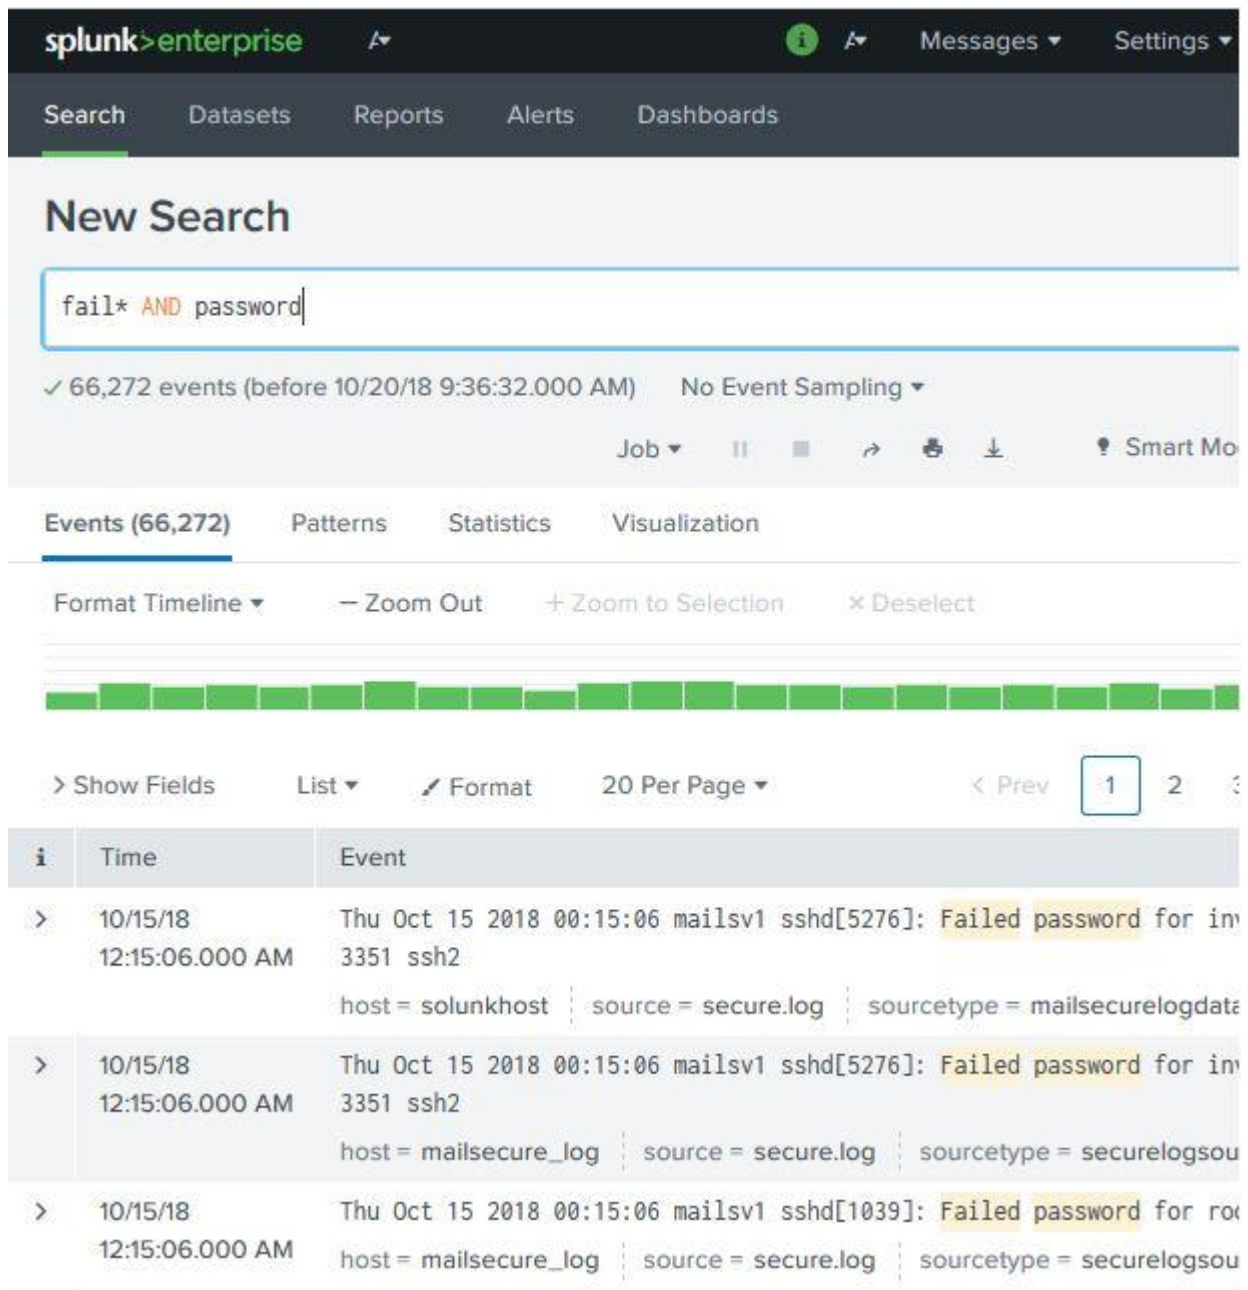

**splunk>enterprise** Messages Settings

Search Datasets Reports Alerts Dashboards

## New Search

fail\* AND password

✓ 66,272 events (before 10/20/18 9:36:32.000 AM) No Event Sampling

Job II [Icons] Smart Monitor

Events (66,272) Patterns Statistics Visualization

Format Timeline - Zoom Out + Zoom to Selection x Deselect

> Show Fields List Format 20 Per Page < Prev 1 2 3

| i | Time                        | Event                                                                                                                                                                    |
|---|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password for invalid user root 3351 ssh2<br>host = solunkhost   source = secure.log   sourcetype = mailsecurelogdata |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password for invalid user root 3351 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securelogsou  |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[1039]: Failed password for invalid user root 3351 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securelogsou  |

## Refining Search Results

We can further refine the search result by selecting a string and adding it to the search. In the below example, we click over the string **3351** and select the option **Add to Search**.

After **3351** is added to the search term, we get the below result which shows only those lines from the log containing 3351 in them. Also mark how the time line of the search result has changed as we have refined the search.

splunk>enterprise Messages

Search Datasets Reports Alerts Dashboards

## New Search


fail\* AND password 3351

✓ 21 events (before 10/20/18 9:53:14.000 AM) No Event Sampling ▾

Job ▾ || ■ ↻ ⬇ ⬆ ⬇ Smart Mo

Events (21) Patterns Statistics Visualization

Format Timeline ▾ - Zoom Out + Zoom to Selection × Deselect



> Show Fields List ▾ ↗ Format 20 Per Page ▾


| i | Time                        | Event                                                                                                                              |
|---|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed  <br>3351 ssh2<br>host = solunkhost   source = secure.log   sourcetype = r     |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed  <br>3351 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = r |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[3351]: Failed  <br>4856 ssh2<br>host = solunkhost   source = secure.log   sourcetype = r     |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[3351]: Failed  <br>4856 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = r |

## 7. Splunk – Field Searching

When Splunk reads the uploaded machine data, it interprets the data and divides it into many fields which represent a single logical fact about the entire data record.

For example, a single record of information may contain server name, timestamp of the event, type of the event being logged whether login attempt or a http response, etc. Even in case of unstructured data, Splunk tries to divide the fields into key value pairs or separate them based on the data types they have, numeric and string, etc.

Continuing with the data uploaded in the previous chapter, we can see the fields from the **secure.log** file by clicking on the show fields link which will open up the following screen. We can notice the fields Splunk has generated from this log file.

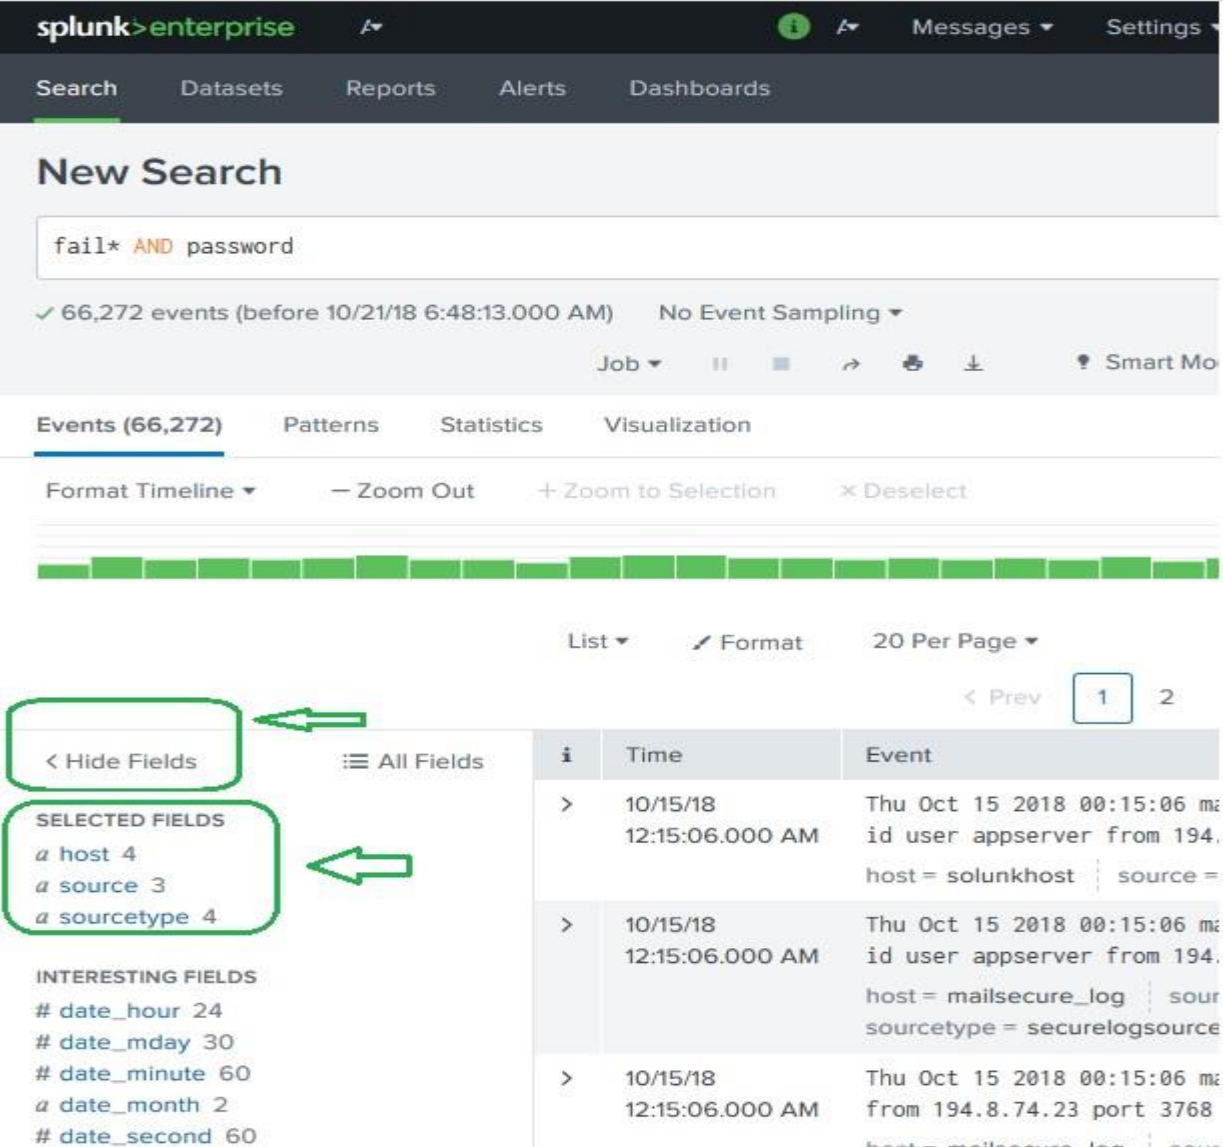

The screenshot shows the Splunk Enterprise interface. At the top, the search bar contains the query `fail* AND password`. Below the search bar, it indicates 66,272 events. The 'Fields' sidebar on the left is open, showing a list of fields. The 'SELECTED FIELDS' section lists `host`, `source`, and `sourcetype`. The 'INTERESTING FIELDS' section lists `date_hour`, `date_mday`, `date_minute`, `date_month`, and `date_second`. The main table displays event details, including Time and Event.

|   | Time                        | Event                                                                                                                      |
|---|-----------------------------|----------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 ma<br>id user appserver from 194.<br>host = solunkhost   source =                                 |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 ma<br>id user appserver from 194.<br>host = mailsecure_log   sour<br>sourcetype = securelogsource |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 ma<br>from 194.8.74.23 port 3768<br>host = mailsecure_log   sour                                  |

## Choosing the Fields

We can choose what fields to be displayed by selecting or unselecting the fields from the list of all fields. Clicking on **all fields** opens a window showing the list of all the fields. Some of these fields have check marks against them showing they are already selected. We can use the check boxes to choose our fields for display.

Besides the name of the field, it displays the number of distinct values the fields have, its data type and what percentage of events this field is present in.

| Select Fields <span>×</span> |                                     |              |                 |                        |          |
|------------------------------|-------------------------------------|--------------|-----------------|------------------------|----------|
| Select All Within Filter     |                                     | Deselect All |                 | Coverage: 1% or more ▾ |          |
| i                            | ✓ ▾                                 | Field ▴ ▾    | # of Values ▴ ▾ | Event Coverage ▴ ▾     | Type ▴ ▾ |
| >                            | <input checked="" type="checkbox"/> | host         | 4               | 100%                   | String   |
| >                            | <input checked="" type="checkbox"/> | source       | 3               | 100%                   | String   |
| >                            | <input checked="" type="checkbox"/> | sourcetype   | 4               | 100%                   | String   |
| >                            | <input type="checkbox"/>            | date_hour    | 24              | 100%                   | Number   |
| >                            | <input type="checkbox"/>            | date_mday    | 30              | 100%                   | Number   |
| >                            | <input type="checkbox"/>            | date_minute  | 60              | 100%                   | Number   |
| >                            | <input type="checkbox"/>            | date_month   | 2               | 100%                   | String   |
| >                            | <input type="checkbox"/>            | date_second  | 60              | 100%                   | Number   |
| >                            | <input type="checkbox"/>            | date_wday    | 7               | 100%                   | String   |
| >                            | <input type="checkbox"/>            | date_year    | 1               | 100%                   | Number   |
| >                            | <input type="checkbox"/>            | date_zone    | 1               | 100%                   | String   |
| >                            | <input type="checkbox"/>            | index        | 1               | 100%                   | String   |
| >                            | <input type="checkbox"/>            | linecount    | 1               | 100%                   | Number   |
| >                            | <input type="checkbox"/>            | pid          | >100            | 75.23%                 | Number   |

## Field Summary

Very detailed stats for every selected field become available by clicking on the name of the field. It shows all the distinct values for the field, their count and their percentages.

The screenshot shows the Splunk interface with the 'Field Summary' for the 'sourcetype' field. The top navigation bar includes 'Messages', 'Settings', 'Activity', and 'Help'. The main search bar is on the right. Below the search bar, there are tabs for 'Alerts' and 'Dashboards'. The 'Field Summary' panel is open, showing the following details:

- Field:** sourcetype
- Values:** 4 Values, 100% of events
- Selected:** Yes
- Reports:** Top values, Top values by time, Rare values, Events with this field
- Values Table:**

| Values                  | Count  | %       |
|-------------------------|--------|---------|
| linux_secure            | 49,858 | 75.232% |
| mailsecurelogdata       | 8,154  | 12.304% |
| securelogsource         | 8,154  | 12.304% |
| access_combined_wcookie | 106    | 0.16%   |
- Search Results:**

10/15/18 12:15:06.000 AM Thu Oct 15 2018 00:15:06 mailsv1 sshd[1039]: Failed password from 194.8.74.23 port 3768 ssh2

host = splunkhost | source = secure.log | sourcetype = mailsecure

## Using Fields in Search

The field names can also be inserted into the search box along with the specific values for the search. In the below example, we aim to find all the records for the date, 15<sup>th</sup> Oct for the host named **mailsecure\_log**. We get the result for this specific date.

**splunk>enterprise** Messages Settings

Search Datasets Reports Alerts Dashboards

### New Search

fail\* AND password host="mailsecure\_log" date\_mday=15

✓ 8,154 events (before 10/21/18 7:22:58)

Events (8,154) Patterns Statist

Format Timeline Zoom Out

List Format 20 Per Page

< Prev 1 2 3

< Hide Fields All Fields

**SELECTED FIELDS**

- a host 1
- a source 1
- a sourcetype 1

**INTERESTING FIELDS**


- # date\_hour 1
- # date\_mday 8
- # date\_minute 1
- a date\_month 1

| i | Time                        | Event                                                                                                                                |
|---|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv<br>id user appserver from 194.8.74<br>host = mailsecure_log source =<br>sourcetype = securelogsource |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv<br>from 194.8.74.23 port 3768 ssh2<br>host = mailsecure_log source =<br>sourcetype = securelogsource |
| > | 10/15/18                    | Thu Oct 15 2018 00:15:06 mailsv                                                                                                      |


## 8. Splunk – Time Range Search

The Splunk web interface displays timeline which indicates the distribution of events over a range of time. There are preset time intervals from which you can select a specific time range, or you can customize the time range as per your need.

The below screen shows various preset timeline options. Choosing any of these options will fetch the data for only that specific time period which you can also analyse further, using the custom timeline options available.

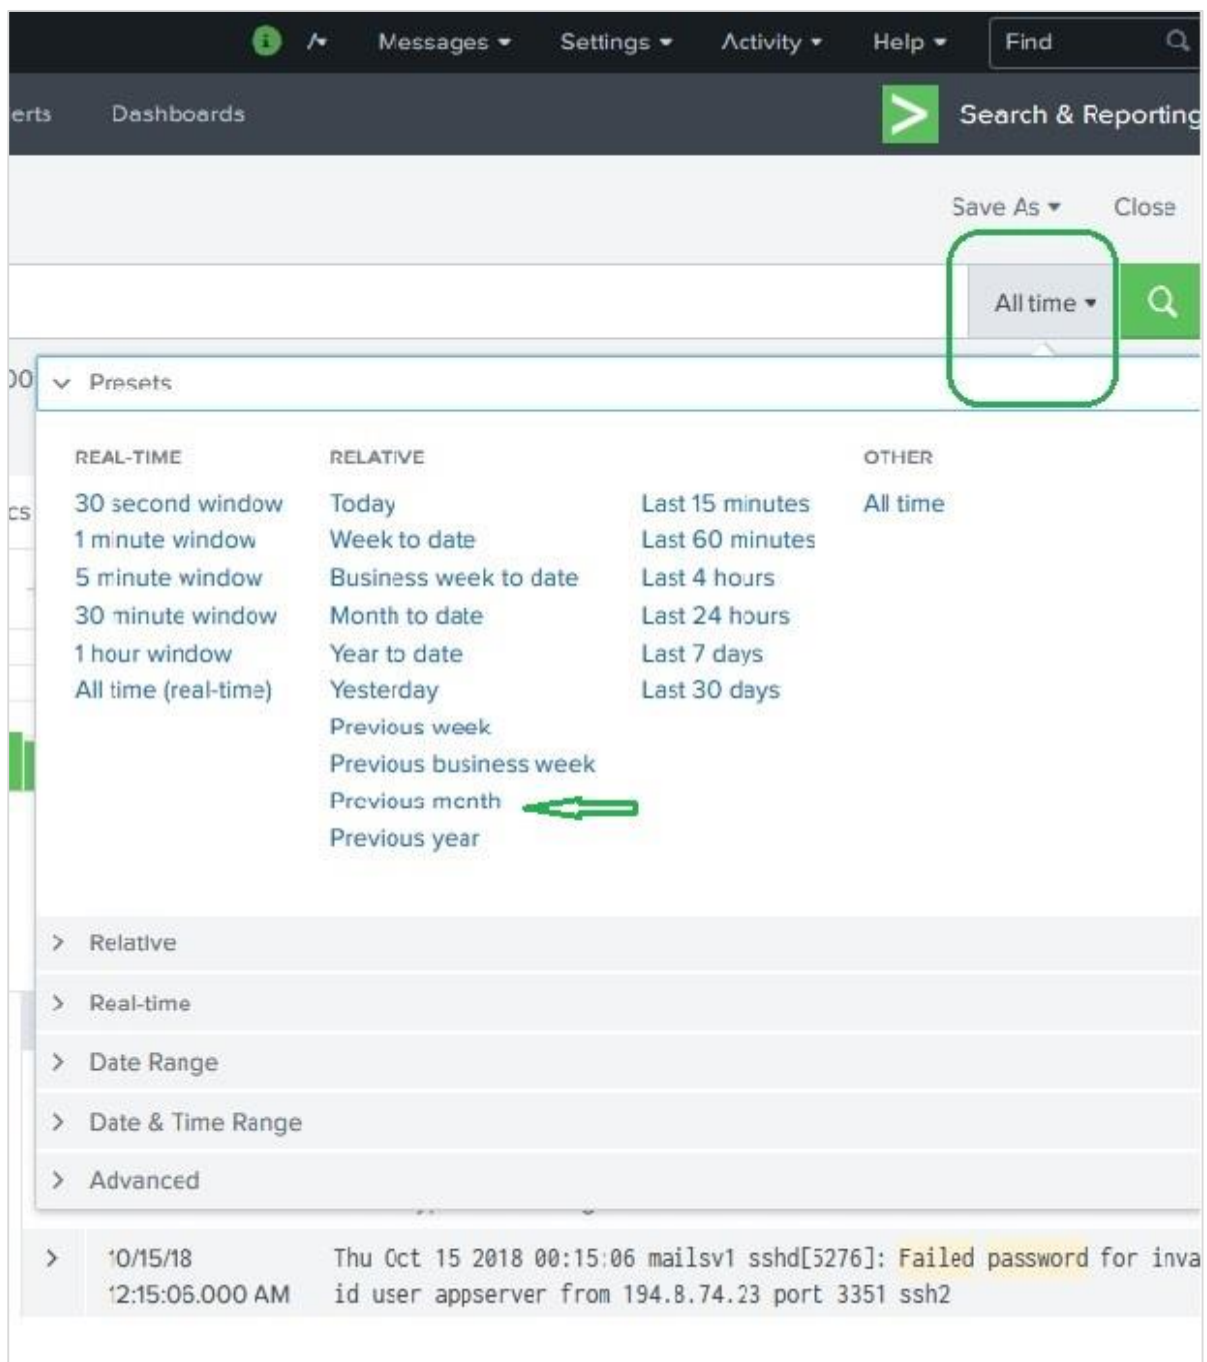


For example, choosing the previous month option gives us the result only for the previous month as you can see in the spread of the timeline graph below.

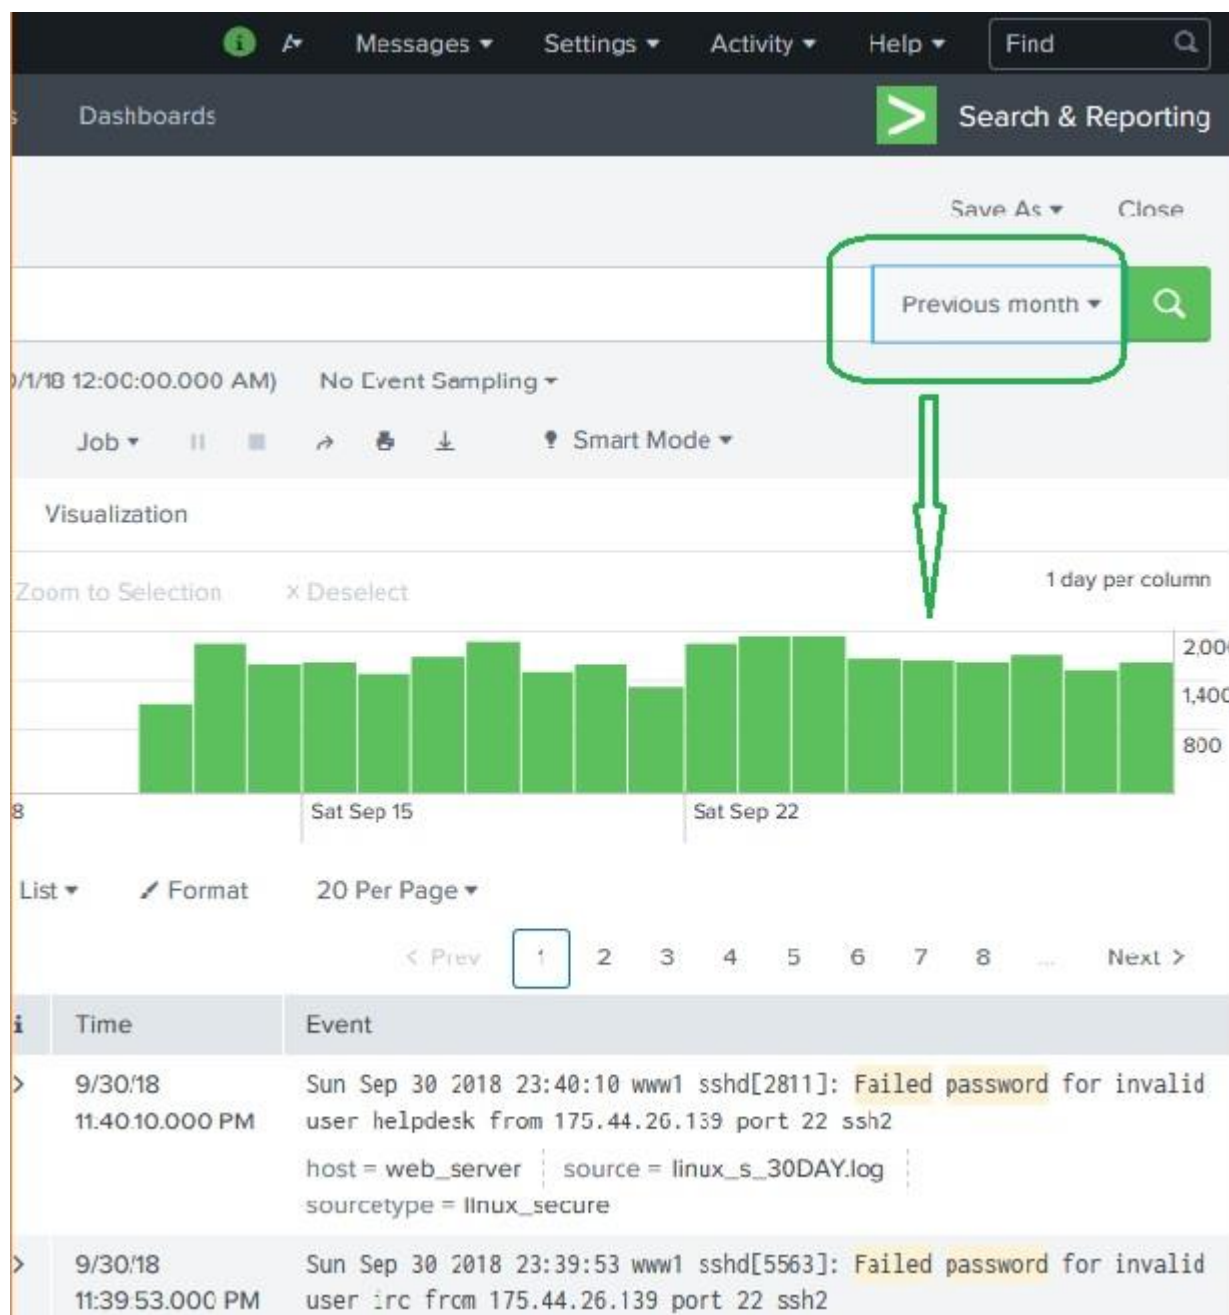

## Selecting a Time Subset

By clicking and dragging across the bars in the timeline, we can select a subset of the result that already exists. This does not cause the re-execution of the query. It only filters out the records from the existing result set.

Below image shows the selection of a subset from the result set:

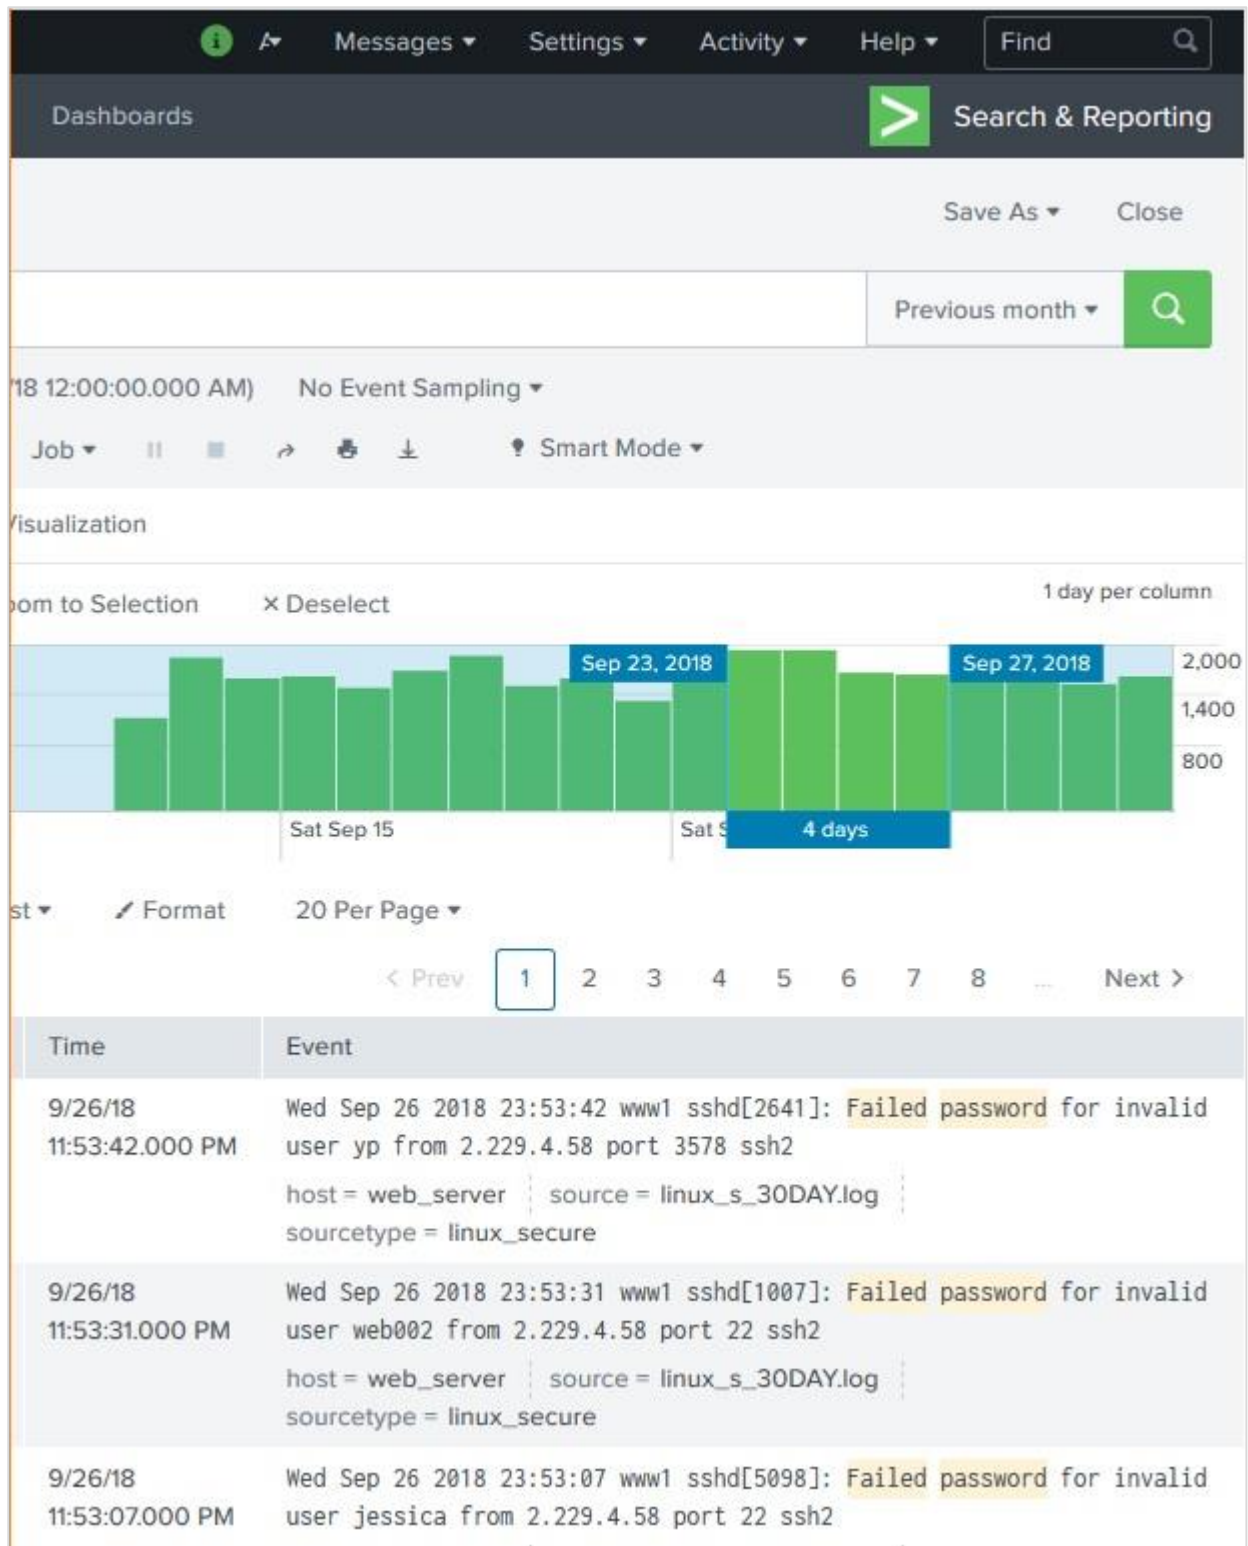

## Earliest and Latest

The two commands, `earliest` and `latest` can be used in the search bar to indicate the time range in between which you filter out the results. It is similar to selecting the time subset, but it is through commands rather than the option of clicking at a specific time line bar. So, it provides a finer control over that data range you can pick for your analysis.

## Nearby Events



tutorialspoint  
SIMPLY EASY LEARNING

## 9. Splunk – Sharing Exporting

When you run a search query, the result is stored as a job in the Splunk server. While this job was created by one specific user, it can be shared across with other users so that they can start using this result set without the necessity of building the query for it again. The results can also be exported and saved as files which can be shared with users who do not use Splunk.

### Sharing the Search Result

Once a query has run successfully, we can see a small upward arrow in the middle right of the web page. Clicking on this icon gives a URL where the query and the result can be accessed. There is a need to grant permission to the users who will be using this link. Permission is granted through the Splunk administration interface.

The screenshot displays the Splunk web interface. At the top, the navigation bar includes 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The main content area shows a 'New Search' with the query `host=mailsecure_log earliest=-15d latest=-7d`. Below the query, it indicates '✓ 8,858 events (before 10/14/18 10:34:18.000 AM)' and 'No Event S'. A 'Share' button is visible. A green arrow points to a small icon in the toolbar, which has triggered a 'Share Job' dialog box. The dialog box contains the following information:

- Share Job** (Title)
- The job's lifetime has been extended to 7 days and read permissions have been set to Everyone. Manage the job via [Job Settings](#).
- Link To Job**: `http://localhost:8000/en-US/app/search/search?sid=154`
- Copy or bookmark the link by right-clicking the icon, or drag the icon into your bookmarks bar.


Below the dialog box, the 'SELECTED FIELDS' section lists:

- `a host 1`
- `a source 1`
- `a sourcetype 1`

The event preview shows a log entry for 'Wed Oct 14 2018 00:15:06' with details like 'p from 193.33.170.23 port' and 'host = mailsecure\_log'.

## Finding the Saved Results

The jobs that are saved to be used by all users with appropriate permissions can be located by looking for the jobs link under the activity menu in the top right bar of the Splunk interface. In the below image, we click on the highlighted link named jobs to find the saved jobs.

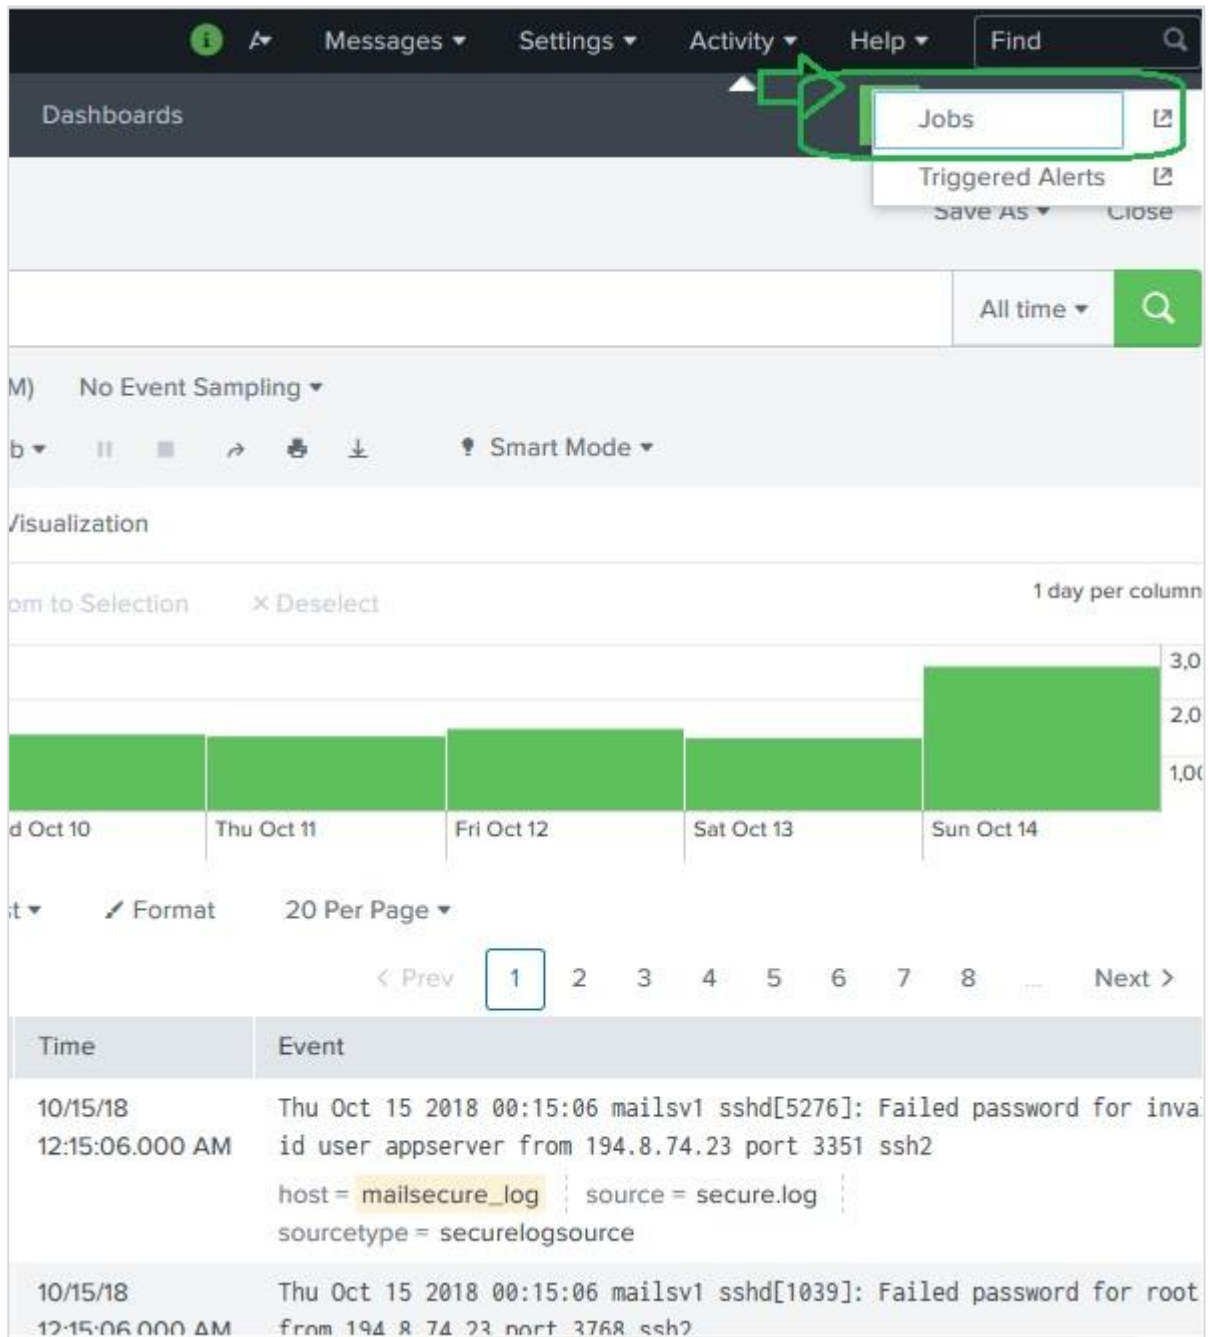

After the above link is clicked, we get the list of all the saved jobs as shown below. Here, we have to note that there is an expiry date post where the saved job will automatically get removed from Splunk. You can adjust this date by selecting the job and clicking on Edit selected and then choosing Extend Expiration.

The screenshot shows the Splunk Enterprise interface. At the top, the header includes the Splunk logo, 'enterprise', and navigation links for Messages and Settings. The main section is titled 'Jobs' with a subtitle 'Manage your jobs. [Learn More](#)'. Below this, there are filters: '2 Jobs', 'App: Search & Reporting (search)', 'Filter by owner', 'Status: All', and a 'filter' button. An 'Edit Selected' button is also present. The main content is a table of jobs.

|                                                                                                | <input type="checkbox"/> | Owner | Application | Events | Size   | Created at               | Expires                  |
|------------------------------------------------------------------------------------------------|--------------------------|-------|-------------|--------|--------|--------------------------|--------------------------|
| >                                                                                              | <input type="checkbox"/> | admin | search      | 9,829  | 364 KB | Oct 23, 2018 10:30:59 AM | Oct 30, 2018 10:53:58 AM |
| <a href="#">host=mailsecure_log</a> [before 10/23/18 10:30:59.000 AM]                          |                          |       |             |        |        |                          |                          |
| >                                                                                              | <input type="checkbox"/> | admin | search      | 8,858  | 300 KB | Oct 21, 2018 10:34:18 AM | Oct 28, 2018 10:45:39 PM |
| <a href="#">host=mailsecure_log earliest=-15d latest=-7d</a> [before 10/14/18 10:34:18.000 AM] |                          |       |             |        |        |                          |                          |

## Exporting the Search Result

We can also export the results of a search into a file. The three different formats available for export are: CSV, XML and JSON. Clicking on the Export button after choosing the formats downloads the file from the local browser into the local system. This is explained in the below image:

The screenshot shows the Splunk 'New Search' interface. At the top, the search bar contains 'host=mailsecure\_log'. Below the search bar, it indicates '9,829 events (before 10/23/18 10:30:59.000 AM)' and 'No Event Sampling'. An 'Export' button is visible in the top right. A green arrow points from this button to the 'Export Results' dialog box. The dialog box shows the 'Format' dropdown set to 'CSV'. Other options in the dropdown include 'Raw Events', 'XML', and 'JSON'. The 'Export' button is highlighted in green. The background shows a bar chart visualization of the search results.

# 10. Splunk – Search Language

The Splunk Search Processing Language (SPL) is a language containing many commands, functions, arguments, etc., which are written to get the desired results from the datasets. For example, when you get a result set for a search term, you may further want to filter some more specific terms from the result set. For this, you need some additional commands to be added to the existing command. This is achieved by learning the usage of SPL.

## Components of SPL

---

SPL has the following components:

- **Search Terms** – These are the keywords or phrases you are looking for.
- **Commands** – The action you want to take on the result set like format the result or count them.
- **Functions** – What are the computations you are going to apply on the results. Like Sum, Average etc.
- **Clauses** – How to group or rename the fields in the result set.

Let us discuss all the components with the help of images in the below section:

### Search Terms

These are the terms you mention in the search bar to get specific records from the dataset which meet the search criteria. In the below example, we are searching for records which contain two highlighted terms.

**splunk>enterprise** Messages Settings

Search Datasets Reports Alerts Dashboards

## New Search

`host="mailsecure_log" nsharp`

✓ 376 events (before 10/24/18 8:57:55.000 AM) No Event Sampling ▾

Job ▾ || ■ ➔ 🖨 ⬇️ ? Smart Mo

Events (376) Patterns Statistics Visualization

Format Timeline ▾ — Zoom Out + Zoom to Selection × Deselect

70  
50  
30

Mon Oct 8 2018 Tue Oct 9 Wed Oct 10 Thu Oct 11 Fri Oct 12

> Show Fields List ▾ ✎ Format 20 Per Page ▾ < Prev 1 :

| i | Time                        | Event                                                                                                                               |
|---|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/13/18<br>12:15:06.000 AM | Tue Oct 13 2018 00:15:06 mailsv1 sudo: nsharp ; TTY=pts/0 ;<br>host = mailsecure_log   source = secure.log   sourcetype = securel   |
| > | 10/13/18<br>12:15:06.000 AM | Tue Oct 13 2018 00:15:06 mailsv1 sshd[10249]: failed password<br>host = mailsecure_log   source = secure.log   sourcetype = securel |
| > | 10/13/18<br>12:15:06.000 AM | Tue Oct 13 2018 00:15:06 mailsv1 sshd[65318]: pam_unix(sshd:se<br>0)                                                                |

## Commands

You can use many in-built commands that SPL provides to simplify the process of analysing the data in the result set. In the below example we use the head command to filter out only the top 3 results from a search operation.

The screenshot shows the Splunk Enterprise web interface. At the top, the navigation bar includes 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'Search' tab is active, displaying a 'New Search' page. The search query entered is `host="mailsecure_log" | head 3`. Below the query bar, it indicates '3 events (before 10/24/18 9:23:59.000 AM)' and 'No Event Sampling'. The interface shows a timeline view with three green bars representing events at 12:15:06.000 AM on Monday, October 15, 2018. Below the timeline, there are controls for 'Show Fields', 'List', 'Format', and '20 Per Page'. A table displays the search results:

| i | Time                        | Event                                                                                                                                             |
|---|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password f<br>3351 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securel |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[1039]: Failed password f<br>host = mailsecure_log   source = secure.log   sourcetype = securel              |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5258]: Failed password f<br>626 ssh2<br>host = mailsecure_log   source = secure.log   sourcetype = securel  |

## Functions

Along with commands, Splunk also provides many in-built functions which can take input from a field being analysed and give the output after applying the calculations on that field. In the below example, we use the **Stats avg()** function which calculates the average value of the numeric field being taken as input.

The screenshot shows the Splunk Search interface. At the top, the navigation bar includes 'splunk>enterprise', a search icon, a green status icon, and links for 'Messages' and 'Settings'. Below this is a secondary navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The main heading is 'New Search'. The search bar contains the query: `host="web_application" | stats avg(bytes)`. Below the search bar, it indicates '✓ 131,645 events (before 10/25/18 6:25:14.000 AM)' and 'No Event Sampling'. A row of icons for job management is visible. Below this is a tabbed interface with 'Events', 'Patterns', 'Statistics (1)', and 'Visualization'. The 'Statistics (1)' tab is active. Below the tabs, there are controls for '20 Per Page', 'Format', and 'Preview'. The results section shows a single row with the field 'avg(bytes)' and its value '2178.2865965285428'.

## Clauses

When we want to get results grouped by some specific field or we want to rename a field in the output, we use the **group by** clause and the **as** clause respectively. In the below example, we get the average size of bytes of each file present in the **web\_application** log. As you can see, the result shows the name of each file as well as the average bytes for each file.

**splunk>enterprise** Messages Settings

Search Datasets Reports Alerts Dashboards

## New Search

Save As Close

host="web\_application" | stats avg(bytes) by file All time

✓ 131,645 events (before 10/25/18 6:32:00.000 AM)

Job

Events Patterns **Statistics (30)** Visualization

20 Per Page Format Preview 1 2

| file           | avg(bytes) |
|----------------|------------|
| ADMIN          | 3406       |
| Admin          | 3406       |
| account        | 2119       |
| adm            | 3406       |
| admin          | 3406       |
| administration | 3406       |

# 11. Splunk – Search Optimization

Splunk already includes the optimization features, analyses and processes your searches for maximum efficiency. This efficiency is mainly achieved through the following two optimization goals:

- **Early Filtering:** These optimizations filter the results very early so that the amount of data getting processed is reduced as early as possible during the search process. This early filter avoids unnecessary lookup and evaluation calculations for events that are not part of final search results.
- **Parallel Processing:** The built-in optimizations can reorder search processing, so that as many commands as possible are run in parallel on the indexers before sending the search results to the search head for final processing.

## Analysing Search Optimisations

---

Splunk has given us tools to analyse how the search optimization works. These tools help us figure out how the filter conditions are used and what is the sequence of these optimisation steps. It also gives us the cost of the various steps involved in the search operations.

### Example

Consider a search operation to find the events which contain the words: fail, failed or password. When we put this search query in the search box, the built-in optimizers act automatically to decide the path of the search. We can verify how long the search took to return a specific number of search results and if needed can go on to check each and every step of the optimization along with the cost associated with it.

We follow the path of **Search -> Job -> Inspect Job** to get these details as shown below:

**splunk>enterprise** 2 Messages

Search Datasets Reports Alerts Dashboards

## New Search

fail\* AND password All time Q

✓ 66,272 events (before 11/21/18 4:51:00.000 PM) No Event Sampling ▼

Job || ■ ↶ 🖨 ⬇ 💡 Smart Mode

Events (66,272) Edit Job Settings...

Send Job to Background

**Inspect Job**

Delete Job

Format Time

4,500  
3,500  
2,500  
1,500

1,930 events during Sunday, September 23, 2018

Sat Sep 15 2018 Sat Sep 22 Sat Sep 29

> Show Fields List ▼ ✍ Format 20 Per Page ▼ < Prev

| i | Time                        | Event                                                                                                                        |
|---|-----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password for root from 10.10.10.10 port 22 ssh2<br>host = mailsecure_log |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password for root from 10.10.10.10 port 22 ssh2<br>host = solunkhost     |

The next screen gives details of the optimization that has occurred for the above query. Here, we need to note the number of events and the time taken to return the result.

## Search job inspector

This search has completed and has returned **1,000** results by scanning **66,272** events in **3.747** seconds

(SID: 1542799259.474) [search.log](#)

### Execution costs

| Duration (seconds) | Component                                      | Invocations |
|--------------------|------------------------------------------------|-------------|
|                    | 0.00 command.fields                            | 28          |
| ██████████         | 2.08 command.search                            | 28          |
|                    | 0.09 command.search.expand_search              | 2           |
|                    | 0.00 command.search.calcfields                 | 25          |
|                    | 0.00 command.search.expand_search.calcfield    | 2           |
|                    | 0.00 command.search.expand_search.fieldaliaser | 2           |
|                    | 0.00 command.search.expand_search.kv           | 2           |
|                    | 0.00 command.search.expand_search.lookup       | 2           |
|                    | 0.00 command.search.expand_search.sourcetype   | 2           |

## Turning Off Optimization

We can also turn off the in-built optimization and notice the difference in the time taken for the search result. The result may or may not be better than the in-built search. In case it is better, we may always choose this option of turning off the optimization for only this specific search.

In the below diagram, we use the No Optimization command presented as **noop** in the search query.

**splunk>enterprise** 2 Messages

Search Datasets Reports Alerts Dashboards

## New Search

fail\* AND password |noop search\_optimization=false All time Q

✓ 66,272 events (before 11/21/18 5:28:57.000 PM) No Event Sampling ▾

Job ▾ || ■ → 🖨 ↓ 💡 Smart Mode

Events (66,272) Edit Job Settings...

Format Timeline × Deselect

4,500  
3,500  
2,500  
1,500

Sat Sep 15 2018 Sat Sep 22 Sat Sep 29

> Show Fields List ▾ ✍ Format 20 Per Page ▾ < Prev

| i | Time                        | Event                                                                                              |
|---|-----------------------------|----------------------------------------------------------------------------------------------------|
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password<br>3351 ssh2<br>host = mailsecure_log |
| > | 10/15/18<br>12:15:06.000 AM | Thu Oct 15 2018 00:15:06 mailsv1 sshd[5276]: Failed password<br>3351 ssh2<br>host = solunkhost     |

The next screen gives us the result of using no optimization. For this given query, the results come faster without using in-built optimizations.

## Search job inspector

This search has completed and has returned **1,000** results by scanning **66,272** events in **1.344** seconds  
(SID: 1542801536.478) [search.log](#)

### Execution costs

| Duration (seconds) | Component                                      | Invocations |
|--------------------|------------------------------------------------|-------------|
|                    | 0.00 command.addinfo                           | 30          |
|                    | 0.00 command.fields                            | 29          |
| ██████████         | 0.74 command.search                            | 29          |
|                    | 0.03 command.search.expand_search              | 2           |
|                    | 0.00 command.search.calcfields                 | 26          |
|                    | 0.00 command.search.expand_search.calcfield    | 2           |
|                    | 0.00 command.search.expand_search.fieldaliaser | 2           |
|                    | 0.00 command.search.expand_search.kv           | 2           |
|                    | 0.00 command.search.expand_search.lookup       | 2           |

# 12. Splunk – Transforming Commands

These are the commands in Splunk which are used to transform the result of a search into such data structures which will be useful in representing the statistics and data visualizations.

## Examples of Transforming Commands

---

Following are some of the examples of transforming commands:


- **Highlight** – To highlight the specific terms in a result.
- **Chart** – To create a chart out of the search result.
- **Stats** – To create statistical summaries from the search result.

### Highlight

This command is used to **highlight specific terms in the search result set**. It is used by supplying the search terms as arguments to the highlight function. Multiple search terms are supplied by separating them with comma.

In the below example, we search for the terms, **safari** and **butter** in the result set.

The **chart** command is a transforming command that returns your results in a table format. The results can then be used to display the data as a chart, such as column, line, area, etc. In the below example, we create a horizontal bar chart by plotting the average size of bytes for each file type.

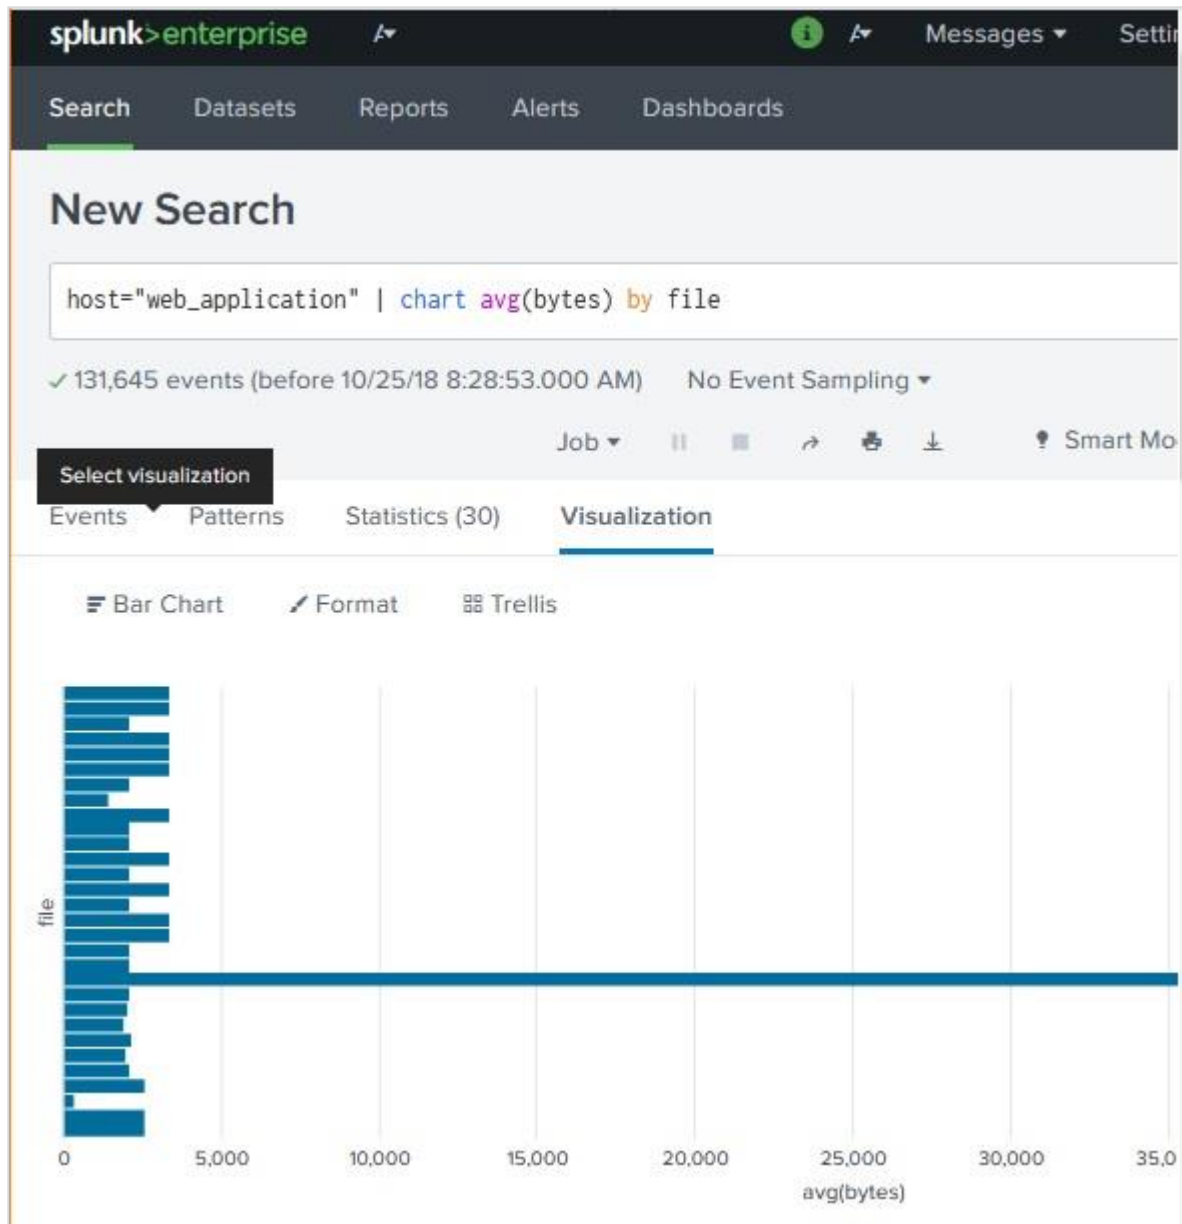

## Stats

The Stats command transforms the search result data set into various statistical representations depending on the types of arguments we supply for this command.

In the below example, we use the stats command with count function which is then grouped by another field. Here, we are counting the number of file names created on each week day. The result of the search string come out in a tabular form with rows created for each day.

The screenshot shows the Splunk Enterprise web interface. At the top, the navigation bar includes 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'Search' tab is active. Below the navigation bar, the 'New Search' section contains a search bar with the query `host="web_application" | stats count(file) by date_wday`. To the right of the search bar is a dropdown menu set to 'All time' and a green search button. Below the search bar, a status message indicates '131,645 events (before 10/25/18 9:00:03.000 AM)'. A 'Select visualization' dropdown menu is open, showing options: 'Events', 'Patterns', 'Statistics (7)', and 'Visualization'. The 'Statistics (7)' option is selected. Below the visualization options, there are controls for '50 Per Page', 'Format', and 'Preview'. The main content area displays a table with two columns: 'date\_wday' and 'count(file)'. The table lists the days of the week and their corresponding file counts.

| date_wday | count(file) |
|-----------|-------------|
| friday    | 22775       |
| monday    | 17754       |
| saturday  | 16899       |
| sunday    | 17217       |
| thursday  | 21541       |
| tuesday   | 17515       |
| wednesday | 17943       |


# 13. Splunk – Reports

Splunk reports are results saved from a search action which can show statistics and visualizations of events. Reports can be run anytime, and they fetch fresh results each time they are run. The reports can be shared with other users and can be added to dashboards. More sophisticated reports can allow a drill down function to see underlying events which create the final statistics.

In this chapter, we will see how to create and edit a sample report.

## Report Creation

Report creation is a straight forward process where we use the **Save As** option to save the result of a search operation choosing the Reports option. The below diagram shows the **Save As** option.

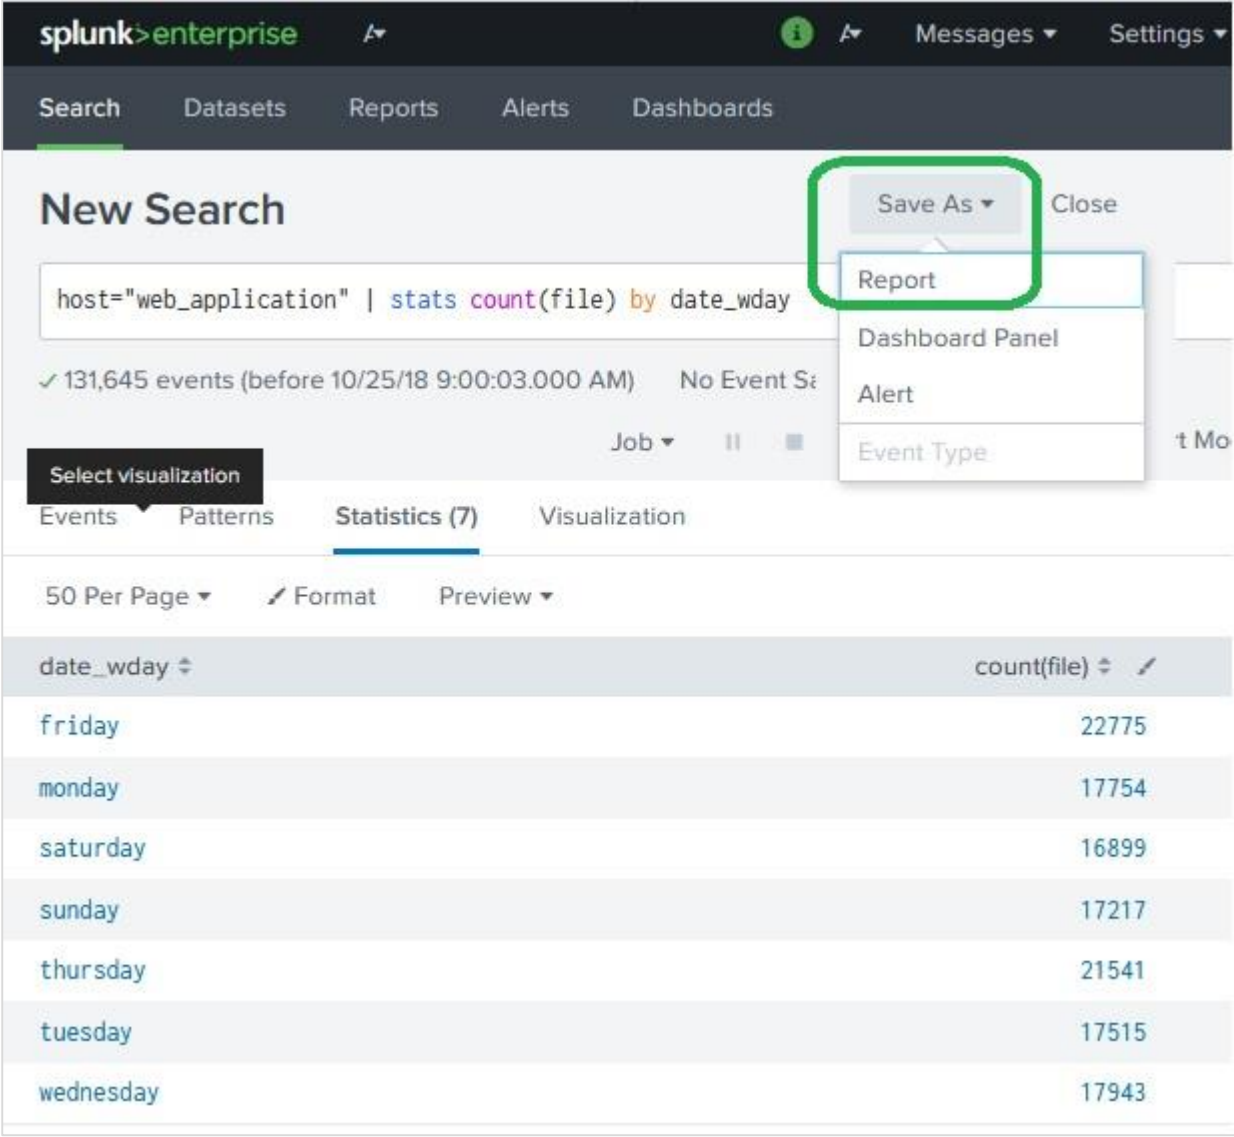

The screenshot shows the Splunk Enterprise interface. The top navigation bar includes 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'New Search' page displays a search query: `host="web_application" | stats count(file) by date_wday`. Below the query, it indicates 131,645 events. The 'Save As' dropdown menu is open, showing options: 'Report', 'Dashboard Panel', 'Alert', and 'Event Type'. The 'Report' option is highlighted. Below the search results, the 'Statistics (7)' visualization is selected, showing a table of results.

| date_wday | count(file) |
|-----------|-------------|
| friday    | 22775       |
| monday    | 17754       |
| saturday  | 16899       |
| sunday    | 17217       |
| thursday  | 21541       |
| tuesday   | 17515       |
| wednesday | 17943       |

By clicking on the Reports option from the dropdown, we get the next window which asks for additional inputs like the name of the report, the description and choosing the time picker. If we choose the time picker, it allows the time range to be adjusted when we run the report. Below diagrams show how we fill the required details and then click save.


The screenshot shows the 'Save As Report' dialog box in the Splunk interface. The dialog is titled 'Save As Report' and has a close button (X) in the top right corner. It contains the following fields and options:

- Title:** A text input field containing 'Files\_By\_Weekday'.
- Description:** A text input field containing 'Show the count of files by weekday'.
- Content:** A dropdown menu with a table icon, currently showing 'Statistics Table'.
- Time Range Picker:** Two buttons, 'Yes' and 'No', for selecting the time range.

At the bottom right of the dialog are two buttons: 'Cancel' and 'Save'.

## Report Configuration

After clicking save to create the report in the above step, we get the next screen asking for configuring the report as shown below. Here, we can configure the permissions, scheduling the report, etc. We also get an option to go to the next step and add the report to a dashboard.

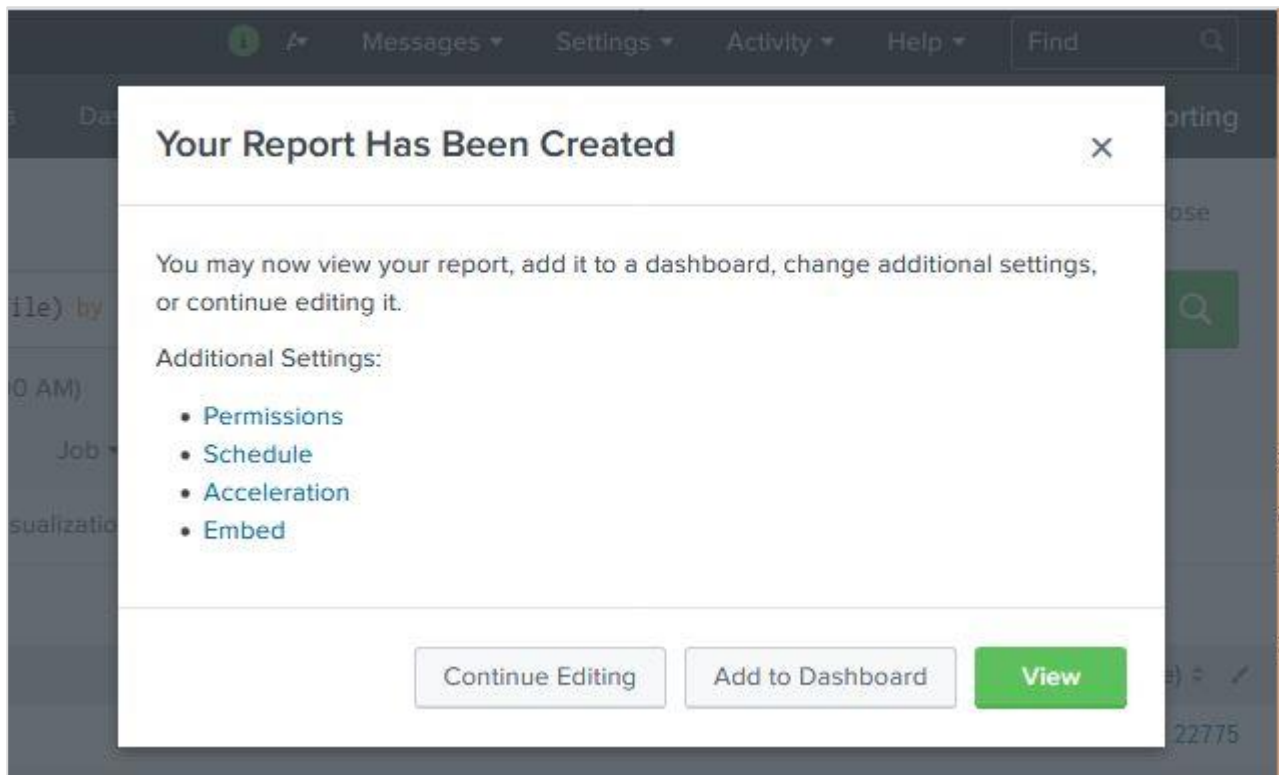

If we click on **View** in the above step, we can see the report. We also get configuration options after the report is created.

**Files\_By\_Weekday**

Show the count of files by weekday

**All time** ▼

✓ 131,645 events (before 10/25/18 9:00:00)

7 results    50 per page ▼

| date_wday ↕ | count(file) ↕ |
|-------------|---------------|
| friday      | 22775         |
| monday      | 17754         |
| saturday    | 16899         |
| sunday      | 17217         |
| thursday    | 21541         |
| tuesday     | 17515         |
| wednesday   | 17943         |

The 'Edit' dropdown menu is open, showing the following options: Open in Search, Edit Description, Edit Permissions, Edit Schedule, Edit Acceleration, Clone, Embed, and Delete. The 'Open in Search' option is highlighted.

## Modifying Report Search Option

While we can edit the permissions, schedule, etc., sometimes we need to modify the original search string. This can be done by choosing the **Open in Search** option as given in the above image. That will open the original search option again which we can be edited to a new search. Refer to the below image:

splunk>enterprise App: Sear... Administr... Help Find

Search Datasets Reports Alerts Dashboards Search & Rep

## Files\_By\_Weekday

host="web\_application" | stats count(file) by date\_wday All time Q

✓ 131,645 events (before 10/25/18 10:08:00.000 AM) No Event Sampling ▼

Events Patterns **Statistics (7)** Visualization

50 Per Page ▼ Format Preview ▼

| date_wday ↕ | count(file) ↕ ✎ |
|-------------|-----------------|
| friday      | 22775           |
| monday      | 17754           |
| saturday    | 16899           |
| sunday      | 17217           |
| thursday    | 21541           |
| tuesday     | 17515           |
| wednesday   | 17943           |


# 14. Splunk – Dashboards

A dashboard is used to represent tables or charts which are related to some business meaning. It is done through panels. The panels in a dashboard hold the chart or summarized data in a visually appealing manner. We can add multiple panels, and hence multiple reports and charts to the same dashboard.

## Creating Dashboard

We will continue with the search query from the previous chapter which shows the count of files by week days.

We choose the Visualization tab to see the result as a pie chart. To put the chart on a dashboard, we can choose the option **Save As -> Dashboard Panel** as shown below.

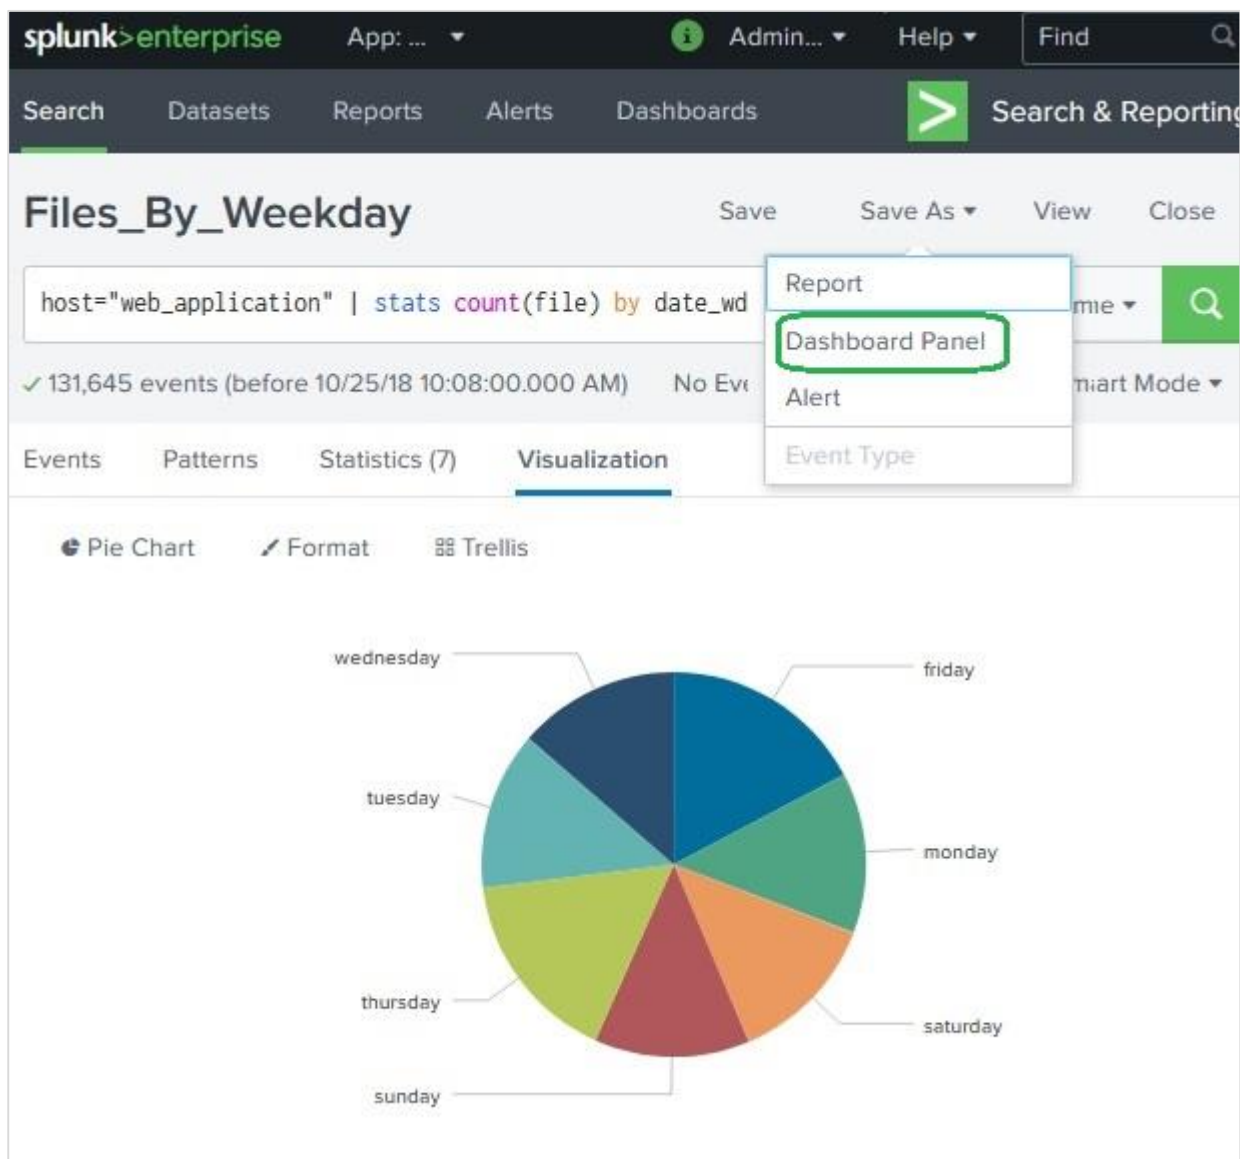

The next screen will ask for fillings the details of the dashboard and the panel in it. We fill the screen with details as shown below.

### Save As Dashboard Panel

Dashboard

New

Existing

Dashboard Title

File Invetigation

Dashboard ID ?

file\_invetigation

Can only contain letters, numbers and underscores.

Dashboard Description

Investigating the properties of the files

Dashboard Permissions

Private

Shared in App

Panel Title

Weekly Distribution

Panel Powered By

🔍 Inline Search

📄 Report

Drilldown ?

No action

Panel Content


📊 Statistics

🥞 Pie Chart

Cancel


Save

On clicking on Save button, the next screen gives an option to view dashboard. On choosing to view dashboard, we get the following output where we can see the dashboard and options to edit, export or delete.

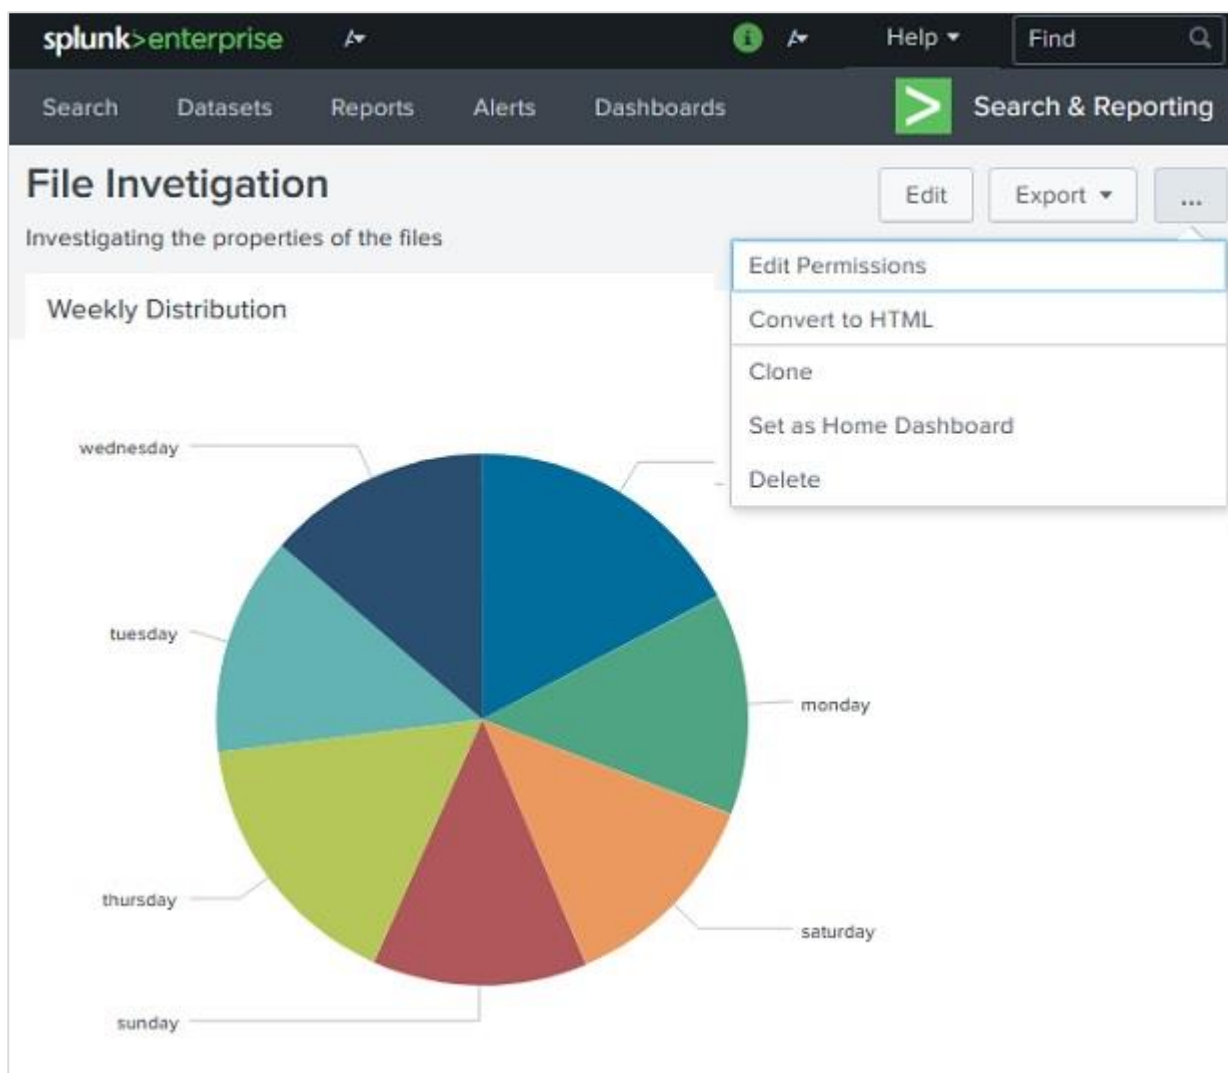

## Adding Panel to Dashboard

We can add a second chart to the dashboard by adding a new panel containing the chart. Below is the bar chart and its query which we are going to add to the above dashboard.

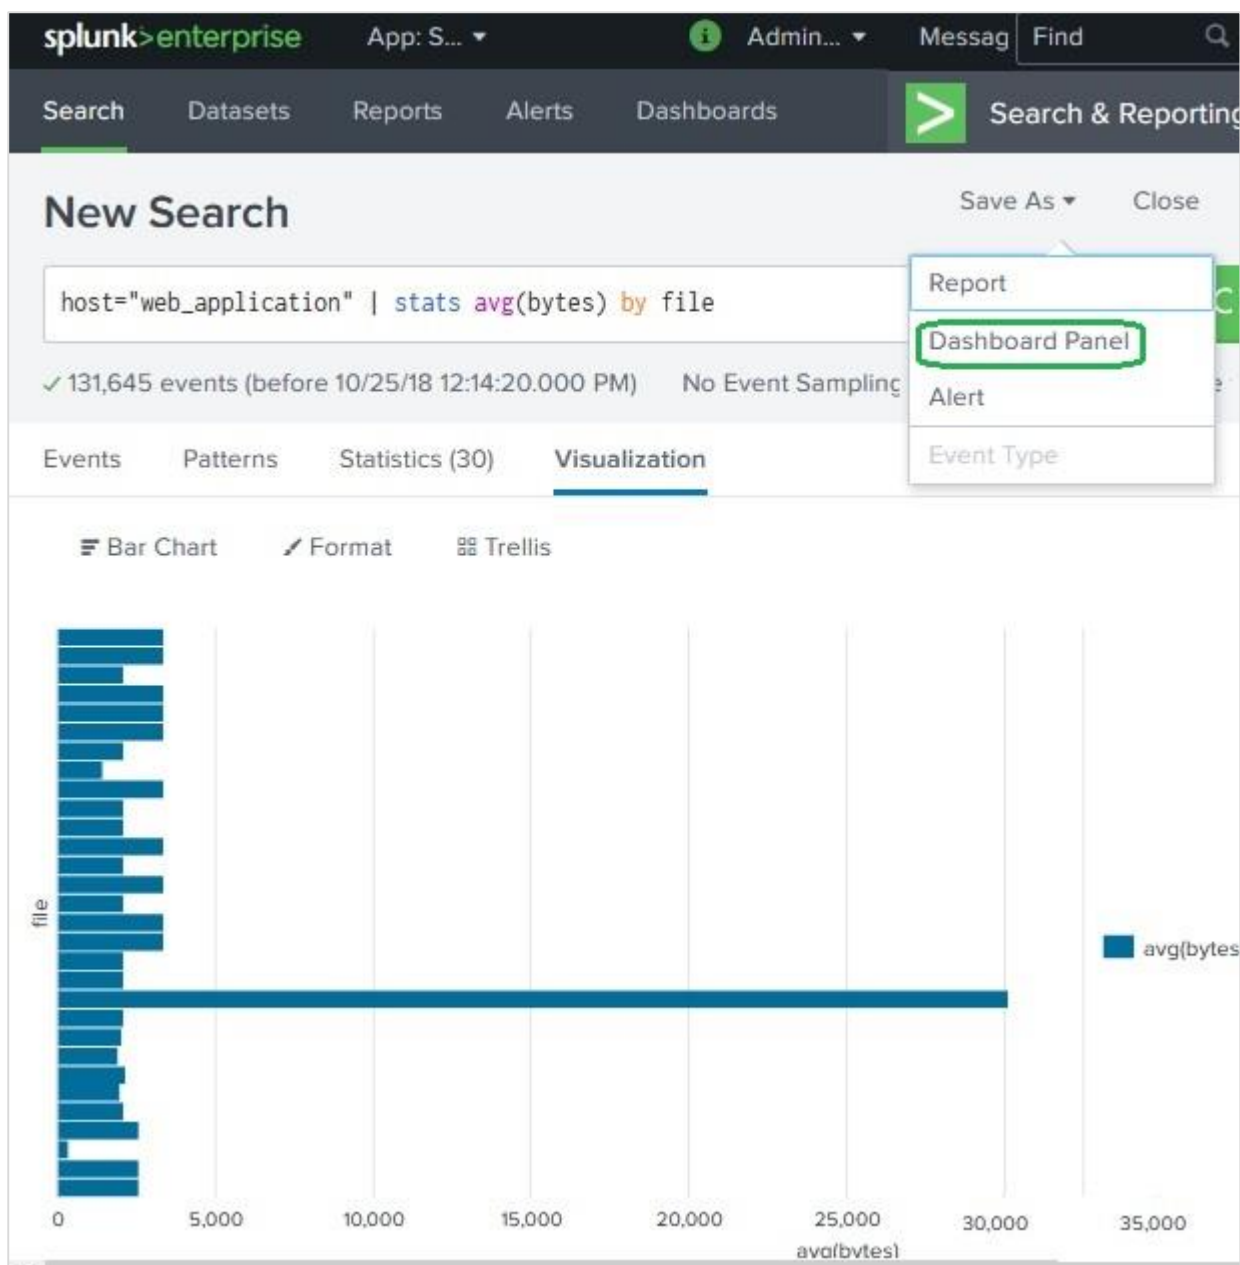

Next, we fill up the details for the second chart and click **Save** as shown in the below image:

### Save As Dashboard Panel

Dashboard

New

Existing

File Investigation ▼

Panel Title

File Average Size

Panel Powered By ?

Q Inline Search

Drilldown ?

No action

Panel Content


Statistics

Bar Chart

Cancel

Save

Finally, we get the dashboard which contains both the charts in two different panels. As you can see in the image below, we can edit the dashboard to add more panels and you can add more input elements: Text, Radio and Dropdown buttons to create more sophisticated dashboards.

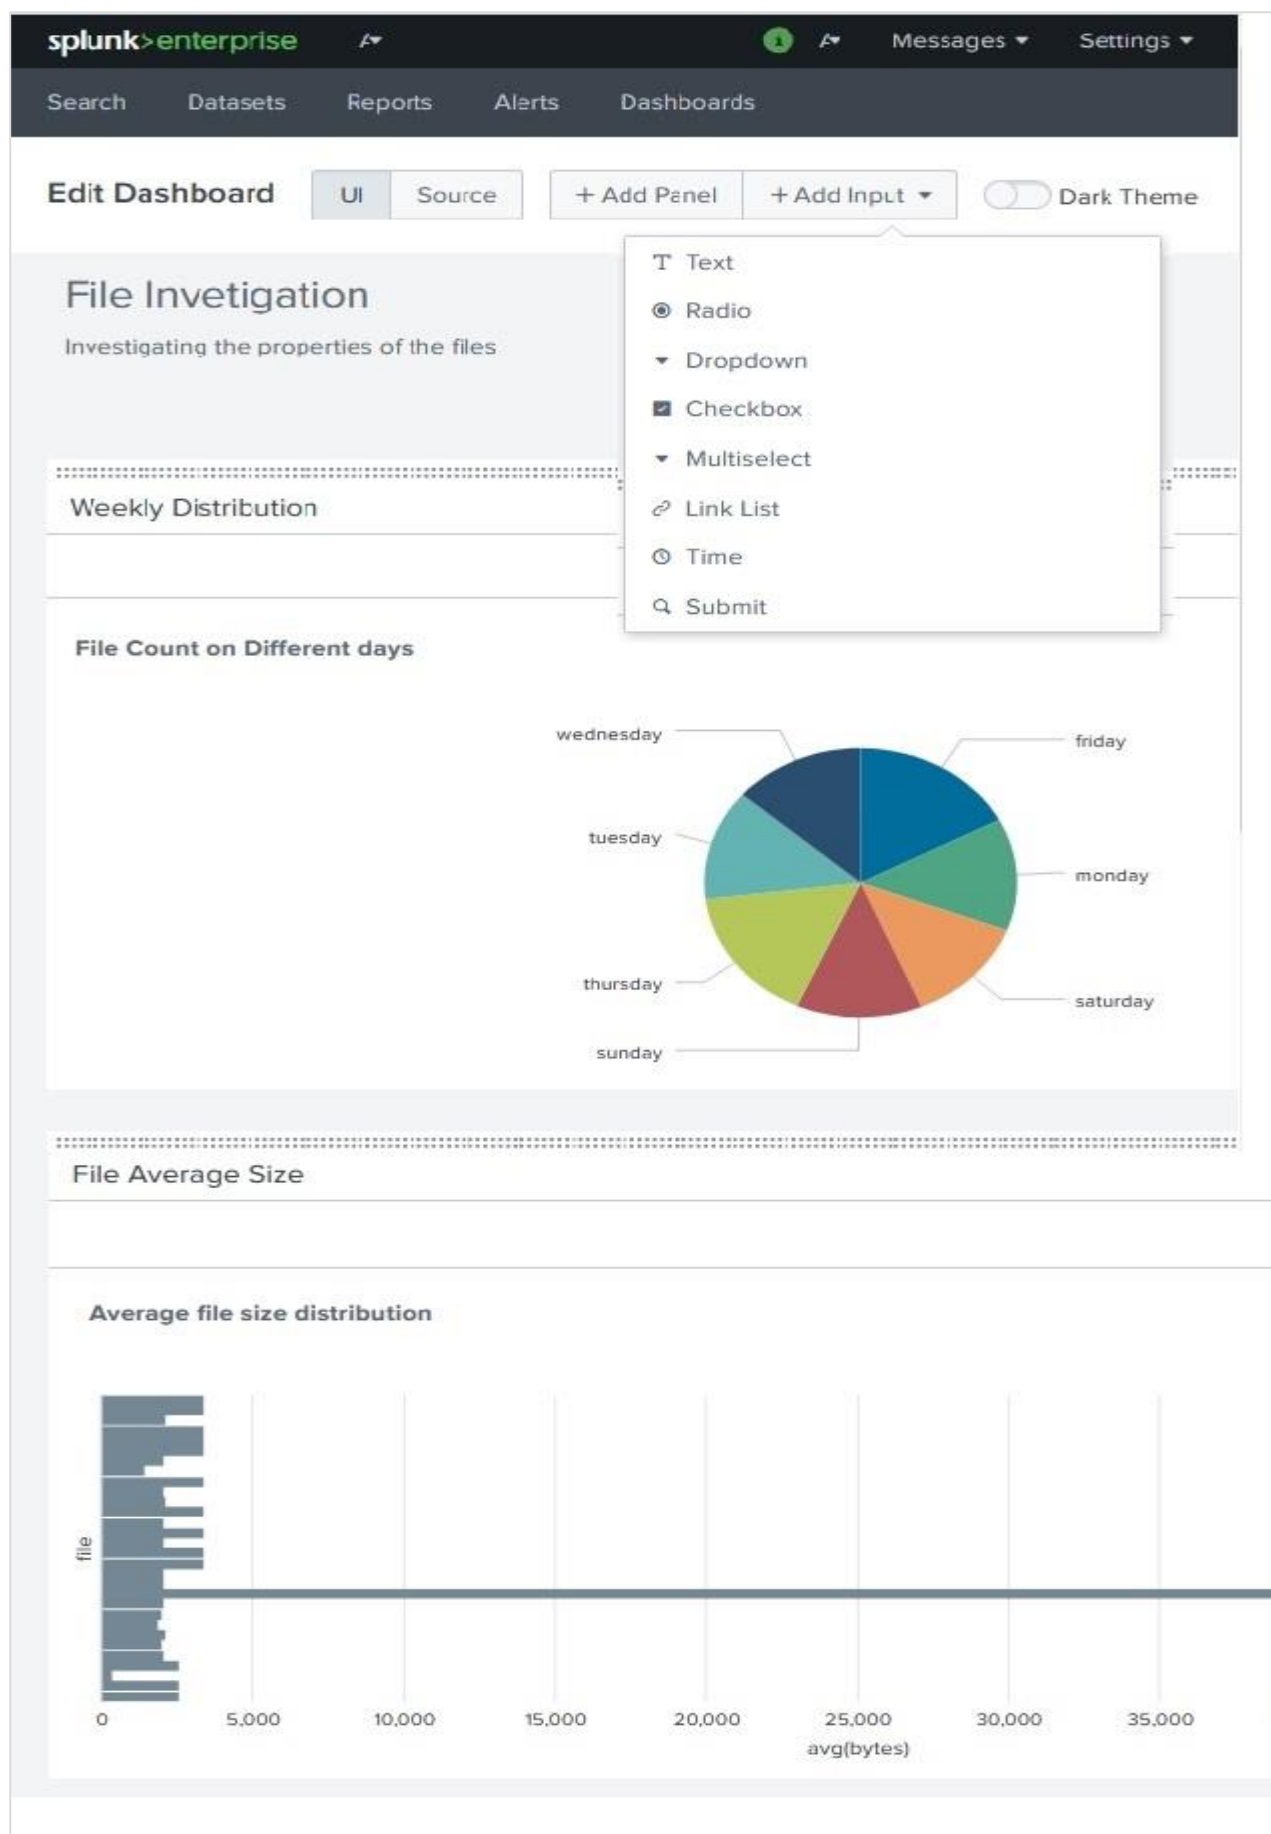


# 15. Splunk – Pivot and Datasets

Splunk can ingest different types of data sources and build tables which are similar to relational tables. These are called **table dataset** or just **tables**. They provide easy ways to analyse and filter the data and lookups, etc. These table data sets are also used in creating pivot analysis which we learn in this chapter.

## Creating a Dataset

We use a Splunk Add-on named **Splunk Datasets Add-on** to create and manage the datasets. It can be downloaded from the Splunk website, <https://splunkbase.splunk.com/app/3245/#/details>. It has to be installed by following the instructions given in the details tab in this link. On successful installation, we see a button named **Create New Table Dataset**.

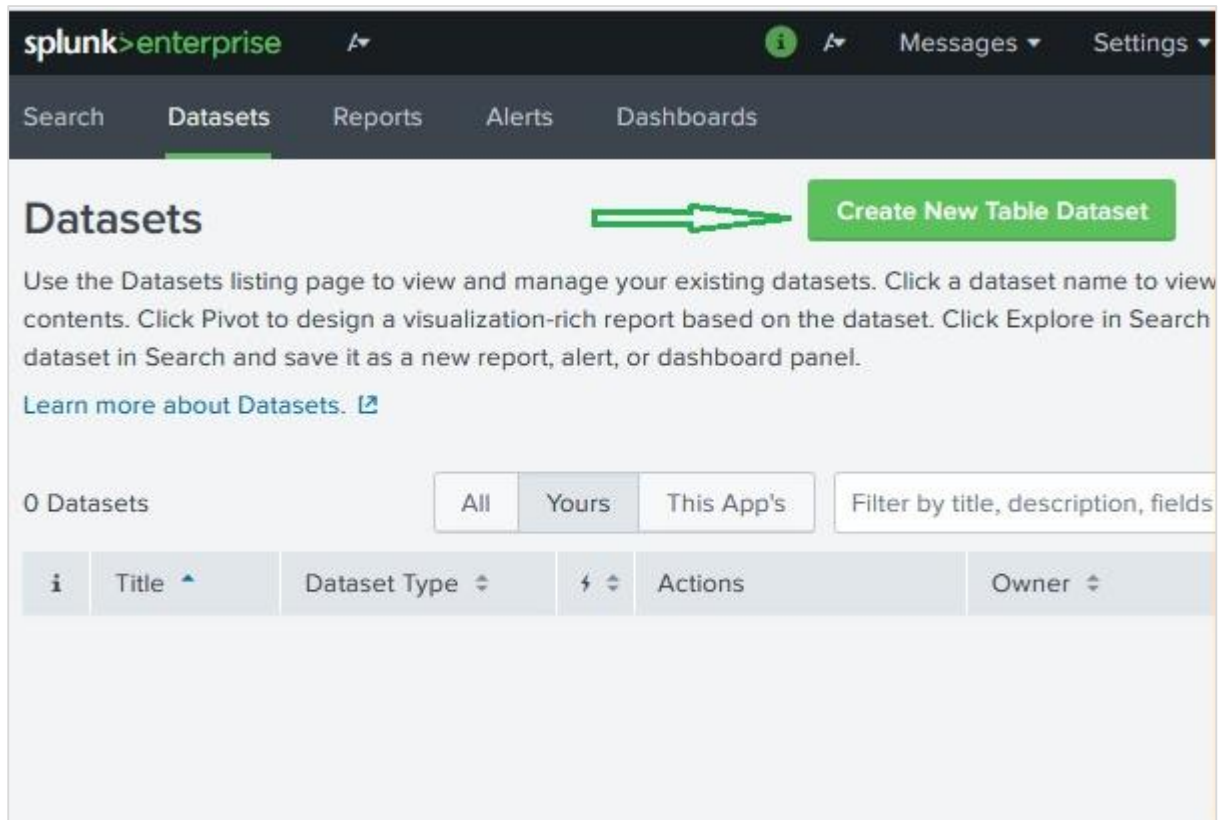


## Selecting a Dataset

Next, we click on the **Create New Table Dataset** button and it gives us the option to choose from the below three options.

- **Indexes and Source Types** – Choose from an existing index or source type which are already added to Splunk through Add Data app.

- **Existing Datasets** – You might have already created some dataset previously which you want to modify by creating a new dataset from it.
- **Search** – Write a search query and the result can be used to create a new dataset.

In our example, we choose an index to be our source of data set as shown in the image below:

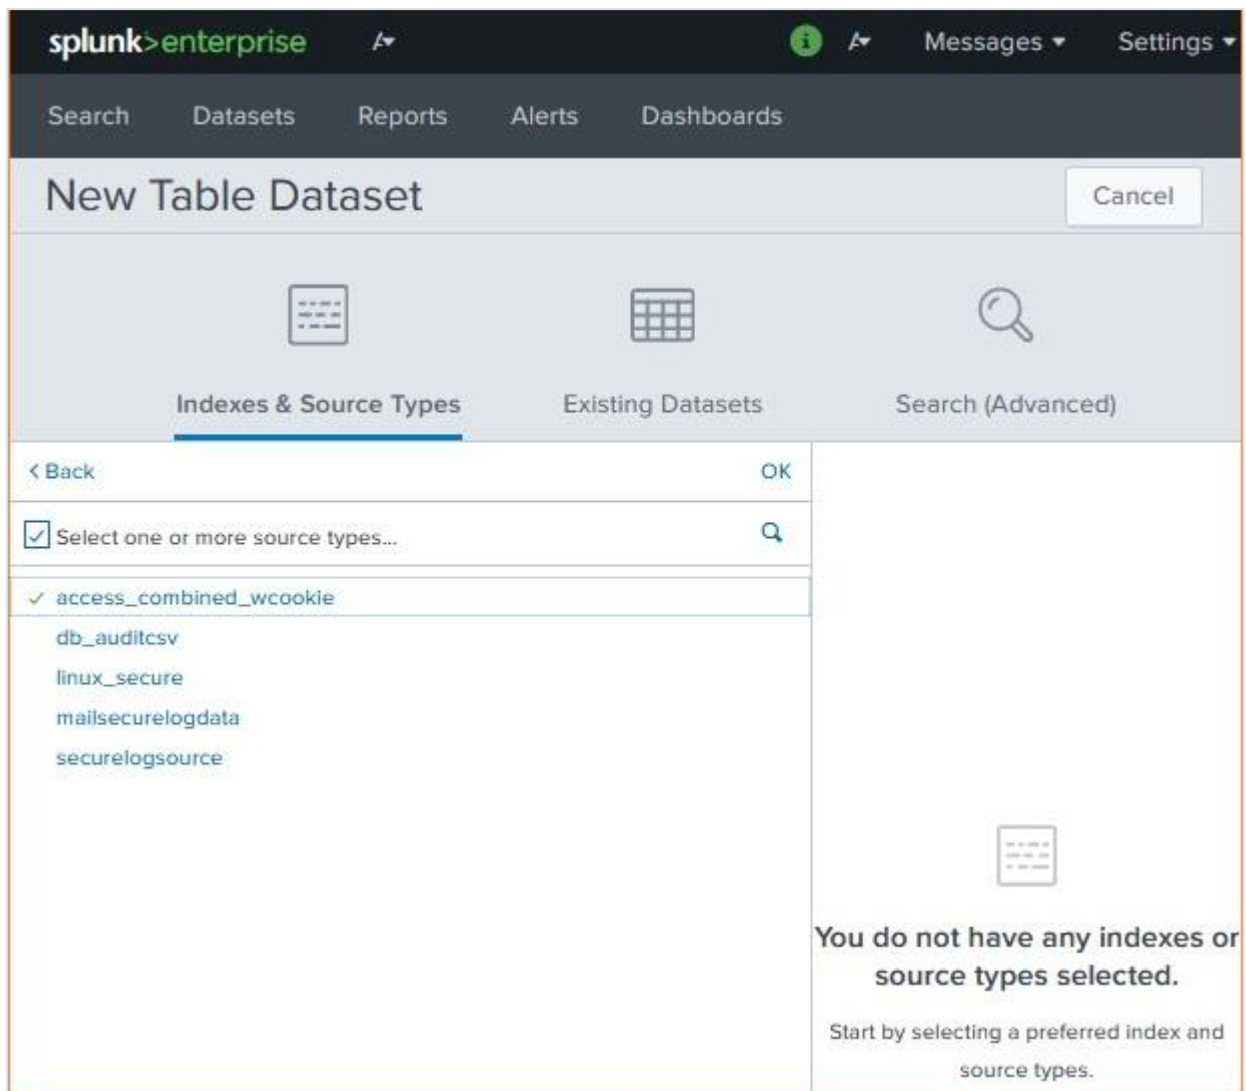

## Choosing Dataset Fields

On clicking OK in the above screen, we are presented with an option to choose the various fields we want to finally get into the Table Dataset. The `_time` field is selected by default and this field cannot be dropped. We choose the fields: **bytes**, **categoryID**, **clientIP** and **files**.

**splunk>enterprise** Messages Settings

Search Datasets Reports Alerts Dashboards

## New Table Dataset Cancel

**Indexes & Source Types** Existing Datasets Search (Advanced)

Index = main  
sourcetypes = access\_combined\_wcookie

+ Add an index and one or more source types...

Select existing fields

☒ Field name

- \_raw
- action
- ✓ bytes
- ✓ categoryid
- ✓ clientip
- date\_hour
- date\_mday
- date\_minute
- date\_month

✓ 50 events (9/12/18 5:05:02.000 AM to 10/26/18 7:10:56.000 AM)

Sample: Latest

| # bytes | a |
|---------|---|
| 2958    |   |
| 2198    |   |
| 669     |   |
| 2223    |   |
| 1911    |   |
| 1130    |   |
| 3833    |   |
| 3906    |   |

**Done**

On clicking done in the above screen, we get the final dataset table with all the selected fields, as seen below. Here the dataset has become similar to a relational table. We save the dataset with **save as** option available in the top right corner.

| * | _time                            | # bytes | a category | IP clientip     |
|---|----------------------------------|---------|------------|-----------------|
| 1 | 2018-10-1 2T23:59:4 5.000+05 :30 | 2958    | TEE        | 192.188.106.240 |
| 2 | 2018-10-1 2T23:59:4 3.000+05 :30 | 2198    | ARCADE     | 212.235.92.150  |
| 3 | 2018-10-1 2T23:59:4 1.000+05 :30 | 669     | null       | 212.235.92.150  |
| 4 | 2018-10-1 2T23:59:3 9.000+05 :30 | 2223    | ARCADE     | 212.235.92.150  |
| 5 | 2018-10-1 2T23:59:4 1.000+05 :30 | 1911    | null       | 192.188.106.240 |

## Creating Pivot

We use the above dataset to create a pivot report. The pivot report reflects aggregation of values of one column with respect to the values in another column. In other words, one columns values are made into rows and another columns values are made into rows.

### Choose Dataset Action

To achieve this, we first select the dataset using the dataset tab and then choose the option **Visualize with Pivot** from the Actions column for that data set.

splunk>enterprise

Search **Datasets** Reports Alerts Dashboards

## Datasets

Use the Datasets listing page to view and manage your existing datasets. Click a dataset name to view its contents. Click Pivot to design a visualization-rich report based on the dataset. Click Explore in Search to create a new dataset in Search and save it as a new report, alert, or dashboard panel.

[Learn more about Datasets.](#)

1 Datasets

All Yours This App's Filter by title, description, field

| i | Title        | Dataset Type | ⚡ | Actions                                                                       | Owner |
|---|--------------|--------------|---|-------------------------------------------------------------------------------|-------|
| > | Access Co... | table        | ⚡ | <b>Manage</b> <b>Explore</b><br>Visualize with Pivot<br>Investigate in Search | admin |

## Choose the Pivot Fields

Next, we choose the appropriate fields for creating the pivot table. We choose category ID in the **split columns** option as this is the field whose values should appear as different columns in the report. Then we choose File in the **Split Rows** option as this is the field whose values should be presented in rows. The result shows count of each categoryid values for each value in the file field.

## New Pivot

Save As...
Clear
Edit Dataset

✓ 131,645 events (before 10/28/18 10:28:19.000 AM)

Filters

All time
+

Split Rows

file
+

Split Columns

categoryId
+

Column Values

Count of Acc...
+

| file             | ACCESSORIES | ARCADE | NULL  | SHOOTER | SIMULATION |
|------------------|-------------|--------|-------|---------|------------|
| ADMIN            | 0           | 0      | 3     | 0       | 0          |
| Admin            | 0           | 0      | 3     | 0       | 0          |
| account          | 0           | 0      | 2     | 0       | 0          |
| adm              | 0           | 0      | 1     | 0       | 0          |
| admin            | 0           | 0      | 2     | 0       | 0          |
| administration   | 0           | 0      | 1     | 0       | 0          |
| anna_nicole.html | 0           | 0      | 235   | 0       | 0          |
| api              | 0           | 0      | 1     | 0       | 0          |
| bdoor            | 0           | 0      | 1     | 0       | 0          |
| cart.do          | 566         | 747    | 28341 | 377     | 372        |
| category.screen  | 2793        | 3750   | 3062  | 1834    | 1775       |
| door             | 0           | 0      | 1     | 0       | 0          |
| error.do         | 0           | 0      | 1796  | 0       | 0          |

20 per page
Format

Next, we can save the pivot table as a Report or a panel in an existing dashboard for future reference.

# 16. Splunk – Lookups

In the result of a search query, we sometimes get values which may not clearly convey the meaning of the field. For example, we may get a field which lists the value of product id as a numeric result. These numbers will not give us any idea of what kind of product it is. But if we list the product name along with the product id, that gives us a good report where we understand the meaning of the search result.

Such linking of values of one field to a field with same name in another dataset using equal values from both the data sets is called a lookup process. The advantage is, we retrieve the related values from two different data sets.

## Steps to Create and Use Lookup File

---

In order to successfully create a lookup field in a dataset, we need to follow the below steps:


### Create Lookup File

We consider the dataset with host as web\_application, and look at the productid field. This field is just a number, but we want product names to be reflected in our query result set. We create a lookup file with the following details. Here, we have kept the name of the first field as **productid** which is same as the field we are going to use from the dataset.


```
productid,productdescription
WC-SH-G04,Tablets
DB-SG-G01,PCs
DC-SG-G02,MobilePhones
SC-MG-G10,Wearables
WSC-MG-G10,Usb Light
GT-SC-G01,Battery
SF-BVS-G01,Hard Drive
```

### Add the Lookup File


Next, we add the lookup file to Splunk environment by using the Settings screens as shown below:

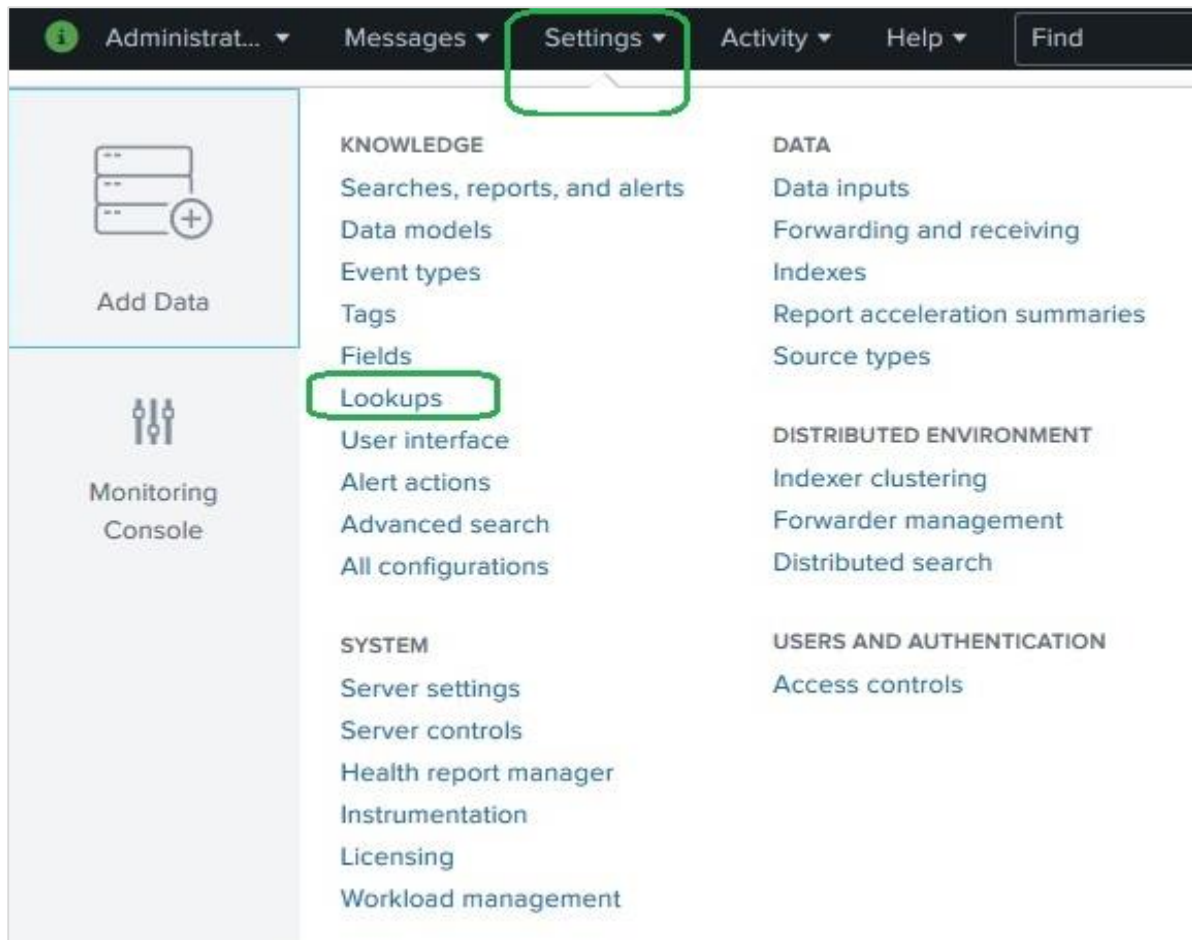

After selecting the Lookups, we are presented with a screen to create and configure lookup. We select lookup table files as shown below.

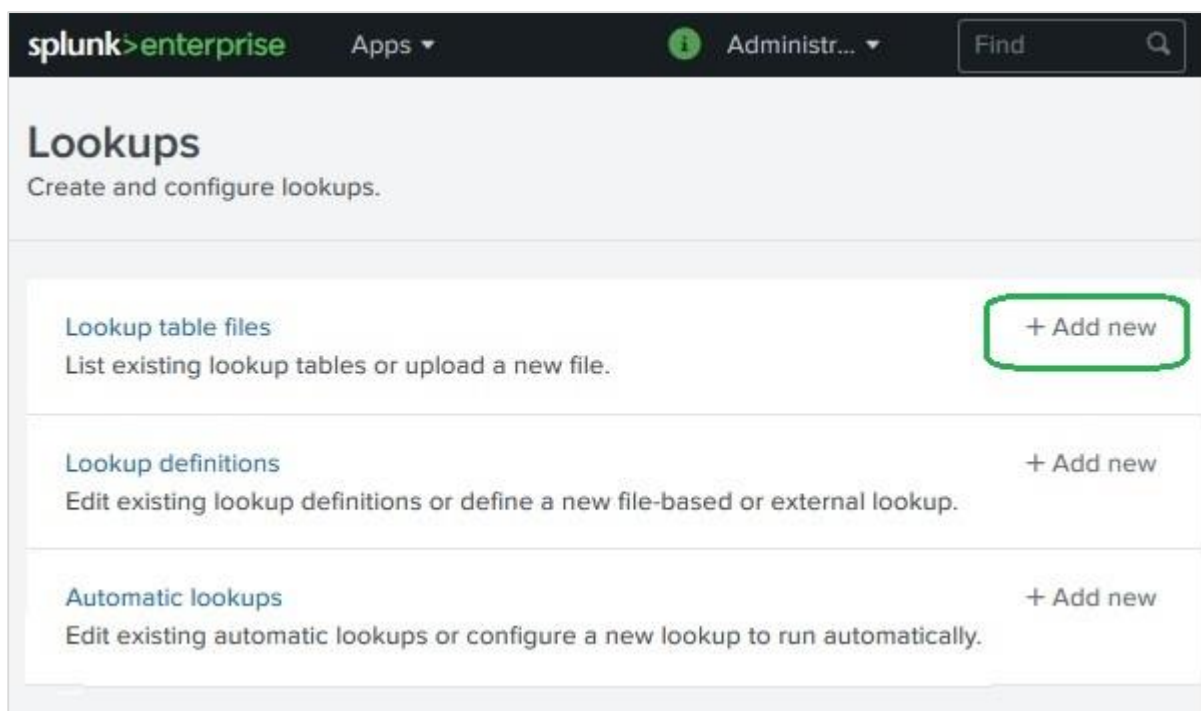

We browse to select the file **productidvals.csv** as our lookup file to be uploaded and select search as our destination app. We also keep the same destination file name.

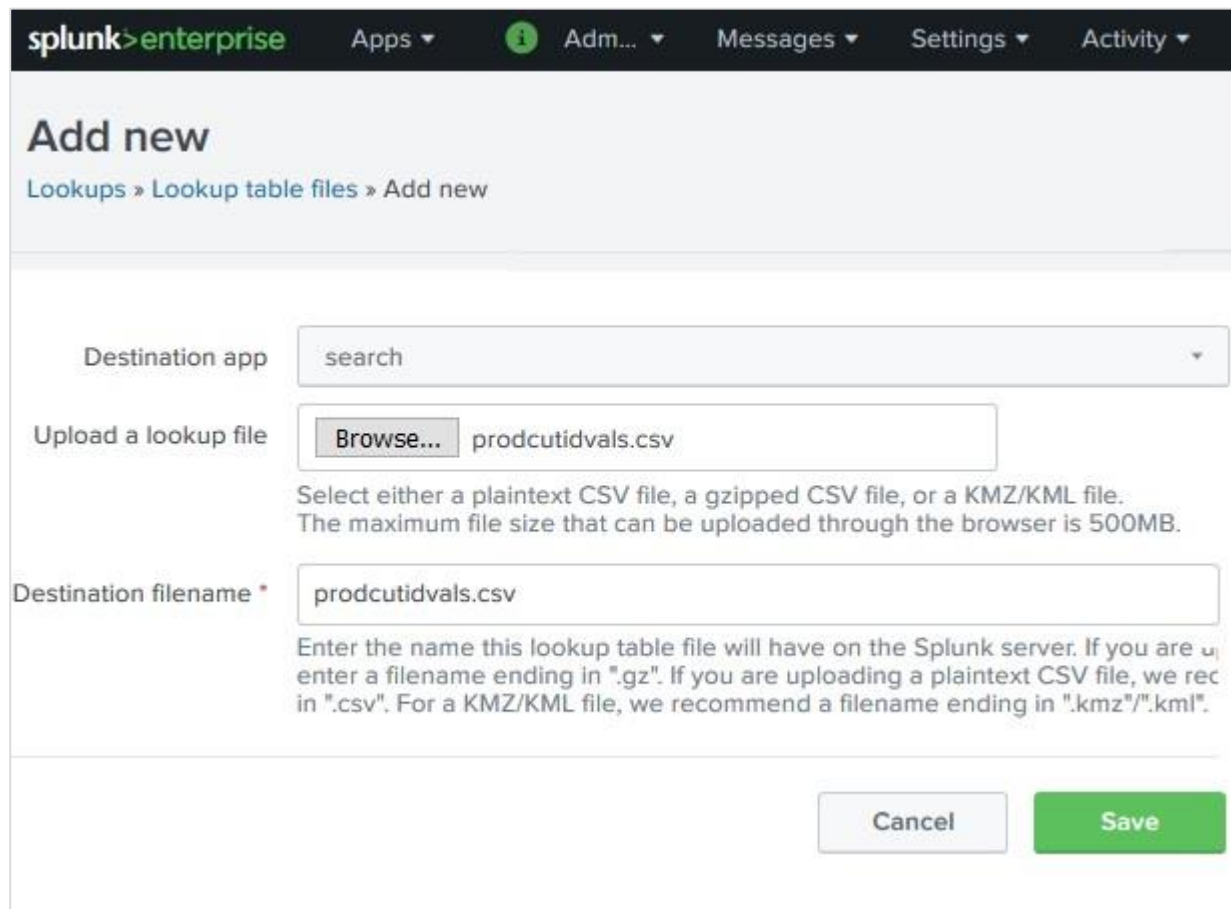


The screenshot shows the Splunk Enterprise web interface. The top navigation bar includes 'splunk>enterprise', 'Apps', 'Admin', 'Messages', 'Settings', and 'Activity'. The main heading is 'Add new', with a breadcrumb trail 'Lookups > Lookup table files > Add new'. The form contains three main sections: 'Destination app' with a dropdown menu set to 'search'; 'Upload a lookup file' with a 'Browse...' button and the filename 'productidvals.csv' displayed, accompanied by instructions to select a plaintext CSV, gzipped CSV, or KMZ/KML file with a 500MB limit; and 'Destination filename' with a text input field containing 'productidvals.csv' and instructions on naming conventions. At the bottom right are 'Cancel' and 'Save' buttons.

On clicking the save button, the file gets saved to the Splunk repository as a lookup file.

## Create Lookup Definitions

For a search query to be able to lookup values from the Lookup file we just uploaded above, we need to create a lookup definition. We do this by again going to **Settings -> Lookups -> Lookup Definition -> Add New**.

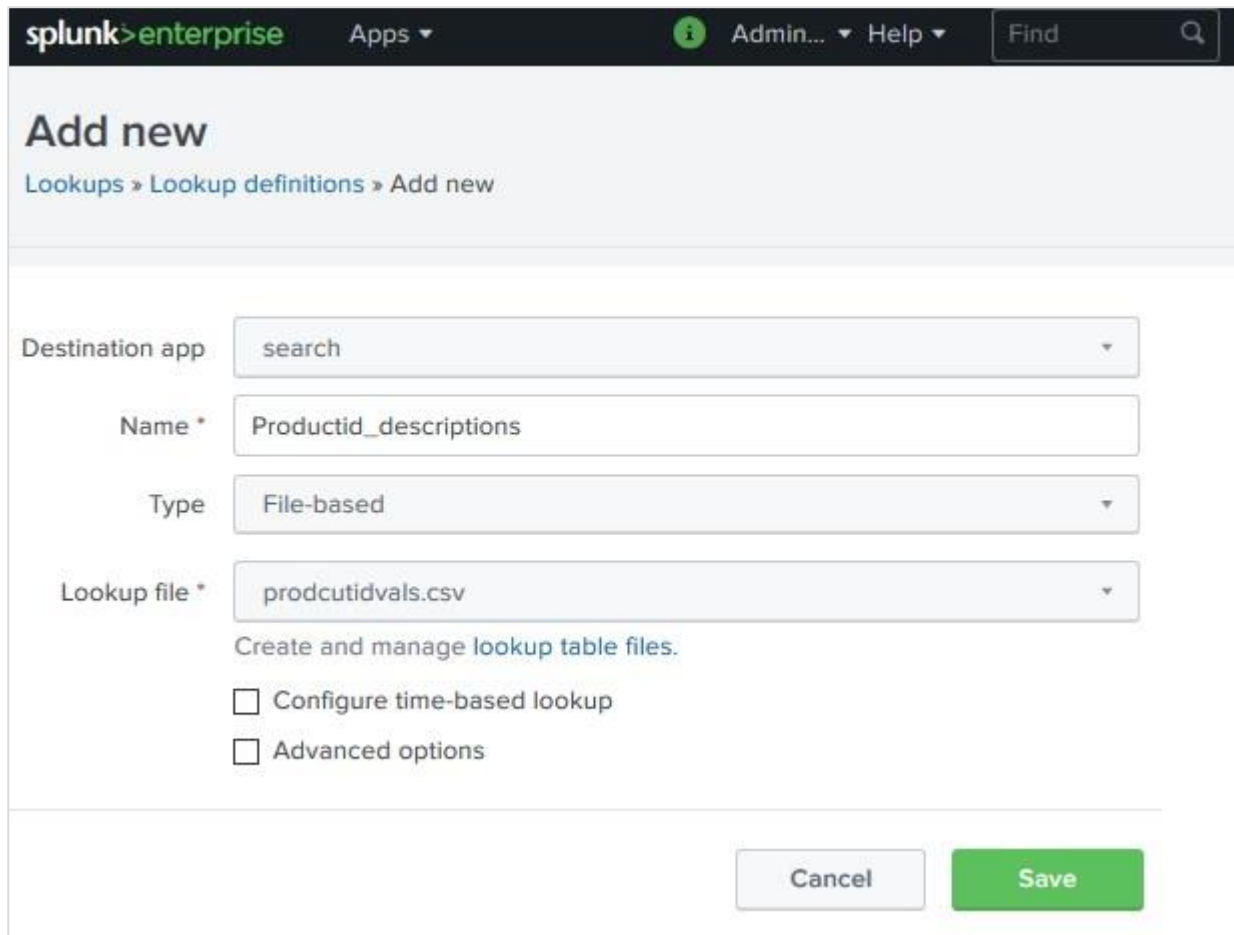

The screenshot shows the Splunk Enterprise web interface. The top navigation bar includes the 'splunk>enterprise' logo, 'Apps' dropdown, an information icon, 'Admin...' dropdown, 'Help' dropdown, and a 'Find' search bar. The main heading is 'Add new', with a breadcrumb trail: 'Lookups » Lookup definitions » Add new'. The form contains the following fields and options:

- Destination app:** A dropdown menu with 'search' selected.
- Name \*:** A text input field containing 'Productid\_descriptions'.
- Type:** A dropdown menu with 'File-based' selected.
- Lookup file \*:** A dropdown menu with 'prodcutidvals.csv' selected.
- Additional options:**
  - A link: 'Create and manage lookup table files.'
  - ☐ Configure time-based lookup
  - ☐ Advanced options

At the bottom right, there are two buttons: 'Cancel' (grey) and 'Save' (green).

Next, we check the availability of the lookup definition we added by going to **Settings -> Lookups -> Lookup Definition**.

splunk>enterprise Messages Settings

## Lookup definitions

Lookups » Lookup definitions New Lookup Definition

Successfully saved "Productid\_descriptions" in search.

Showing 1-6 of 6 items

App Search & Reporting (s... Owner Any Visible in the App

| Name                   | Type     | Supported fields                  | Lookup file            |
|------------------------|----------|-----------------------------------|------------------------|
| Productid_descriptions | file     | productid,productdescription      | prodcutidvals.csv      |
| dnslookup              | external | clienthost,clientip               |                        |
| geo_attr_countries     | file     | country,region_wb,region_un,subre | geo_attr_countries.csv |
| geo_attr_us_states     | file     | state_name,state_fips,state_code  | geo_attr_us_states.csv |
| geo_countries          | geo      | None                              | geo_countries.kmz      |


### Selecting Lookup Field

Next, we need to select the lookup field for our search query. This is done by going to **New search -> All Fields**. Then check the box for **productid** which will automatically add the **productdescription** field from the lookup file also.

| Select Fields <span>×</span> |                                     |                    |             |                             |                      |
|------------------------------|-------------------------------------|--------------------|-------------|-----------------------------|----------------------|
| Select All Within Filter     |                                     | Dese               |             | Filter <input type="text"/> | + Extract New Fields |
| i                            | ✓                                   | Field              | # of Values | Event Coverage              | Type                 |
| >                            | <input checked="" type="checkbox"/> | bytes              | >100        | 100%                        | Number               |
| >                            | <input checked="" type="checkbox"/> | date_wday          | 7           | 100%                        | String               |
| >                            | <input checked="" type="checkbox"/> | file               | 30          | 100%                        | String               |
| >                            | <input checked="" type="checkbox"/> | host               | 1           | 100%                        | String               |
| >                            | <input checked="" type="checkbox"/> | productId          | 18          | 74.49%                      | String               |
| >                            | <input checked="" type="checkbox"/> | productdescription | 18          | 74.49%                      | String               |
| >                            | <input checked="" type="checkbox"/> | source             | 1           | 100%                        | String               |
| >                            | <input checked="" type="checkbox"/> | sourcetype         | 1           | 100%                        | String               |
| >                            | <input type="checkbox"/>            | JSESSIONID         | >100        | 99.6%                       | String               |
| >                            | <input type="checkbox"/>            | action             | 5           | 49.54%                      | String               |
| >                            | <input type="checkbox"/>            | categoryId         | 8           | 43.57%                      | String               |
| >                            | <input type="checkbox"/>            | clientip           | >100        | 100%                        | String               |
| >                            | <input type="checkbox"/>            | date_hour          | 24          | 100%                        | Number               |
| >                            | <input type="checkbox"/>            | date_mday          | 13          | 100%                        | Number               |
| >                            | <input type="checkbox"/>            | date_minute        | 60          | 100%                        | Number               |
| >                            | <input type="checkbox"/>            | date_month         | 2           | 100%                        | String               |

## Using the Lookup Field

Now we use the Lookup field in the search query as shown below. The visualization shows the result with productdescription field instead of productid.

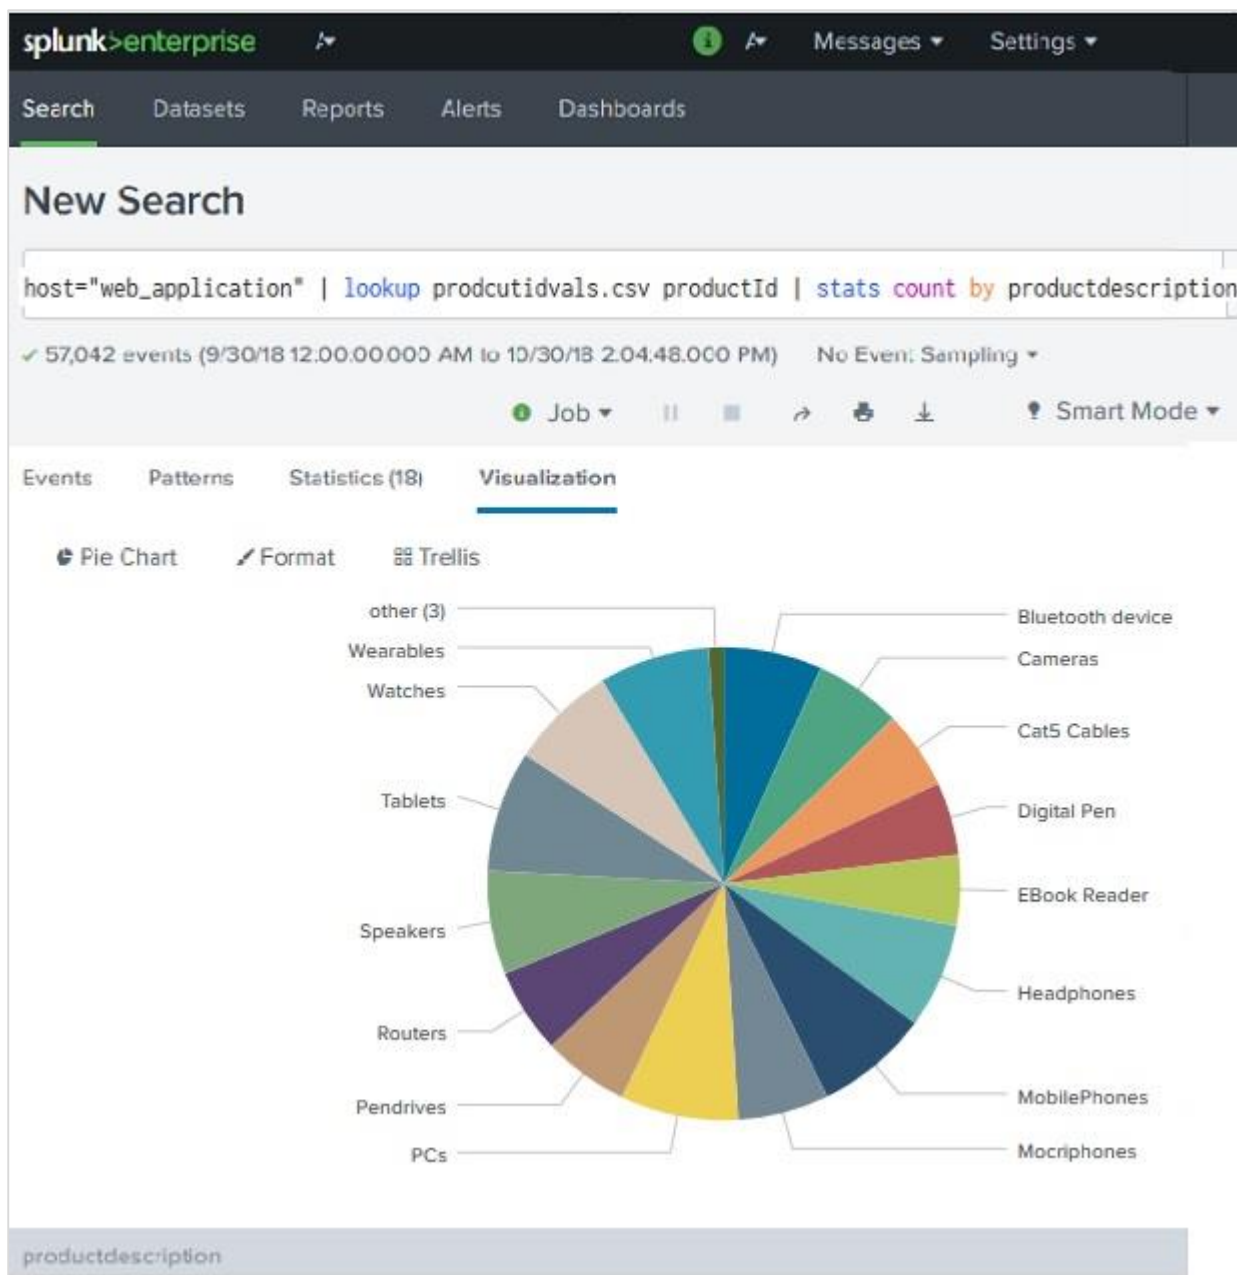


# 17. Splunk – Schedules and Alerts

Scheduling is the process of setting up a trigger to run the report automatically without the user's intervention. Below are the uses of scheduling a report:

- By running the same report at different intervals: monthly, weekly or daily, we can get results for that specific period.
- Improved performance of the dashboard as the reports finish running in the background before the dashboard is opened by the users.
- Sending of reports automatically via email after it finishes running.

## Creating a Schedule

A schedule is created by editing the report's schedule feature. We go to the **Edit Schedule** option on the Edit button as shown in the image below.

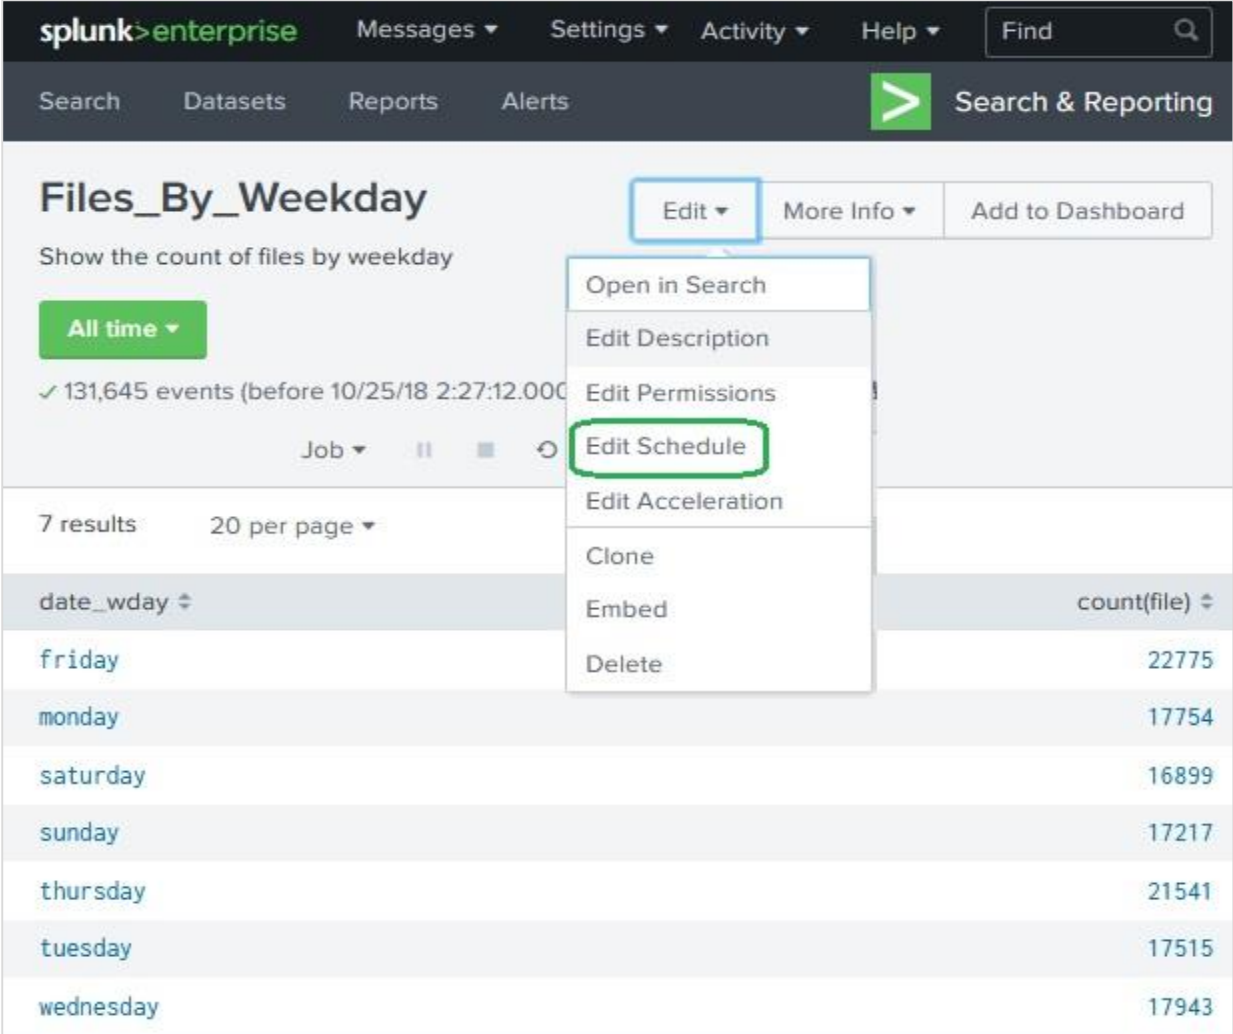

The screenshot shows the Splunk Enterprise interface. At the top, there's a navigation bar with 'splunk>enterprise', 'Messages', 'Settings', 'Activity', 'Help', and a 'Find' search bar. Below this is a secondary navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and a 'Search & Reporting' button. The main content area displays a report titled 'Files\_By\_Weekday' with the description 'Show the count of files by weekday'. There's a green 'All time' filter button and a status bar indicating '131,645 events (before 10/25/18 2:27:12.000)'. Below the status bar are controls for 'Job', a pause button, a refresh button, and a 'Refresh' button. The report shows 7 results, with 20 per page. The data is presented in a table with two columns: 'date\_wday' and 'count(file)'. The table lists the days of the week and their corresponding file counts.

| date_wday | count(file) |
|-----------|-------------|
| friday    | 22775       |
| monday    | 17754       |
| saturday  | 16899       |
| sunday    | 17217       |
| thursday  | 21541       |
| tuesday   | 17515       |
| wednesday | 17943       |

On clicking the edit schedule button, we get the next screen which lays out all the options for creating the schedule.

In the below example, we take all the default options and the report is scheduled to run every week on Monday at 6 AM.

**Edit Schedule** [X]

Scheduling this report results in removal of the time picker from the report display.

Report: **Files\_By\_Weekday**

Schedule Report: ☒ [Learn More](#)

Schedule: Run every week ▼

On: Monday ▼ at: 6:00 ▼

Time Range: All time ▶

Schedule Priority <sup>?</sup>: Default ▼

Schedule Window <sup>?</sup>: No window ▼

Trigger Actions: + Add Actions ▼

Cancel Save

## Important Features of Scheduling

The following are the important features of scheduling:

**Time Range** – It indicates the time range from which the report must fetch the data. It can be last 15 minutes, last 4 hours or last week etc.


**Schedule Priority** – If more than one report is scheduled at the same time then this will determine the priority of a specific report.

**Schedule Window** – When there are multiple report schedules with same priority then we can choose a time window which will help the report to run at anytime during this window. If it is 5 minutes, then the report will run within 5 minutes of its scheduled time.

This helps in enhancing the performance of the scheduled reports by spreading their run time.

## Schedule Actions

The schedule actions are meant to take some steps after the report is run. For example, you may want to send an email stating the run status of the report or run another script. Such actions can be carried out by setting the option by clicking on **Add Actions** button as shown below:

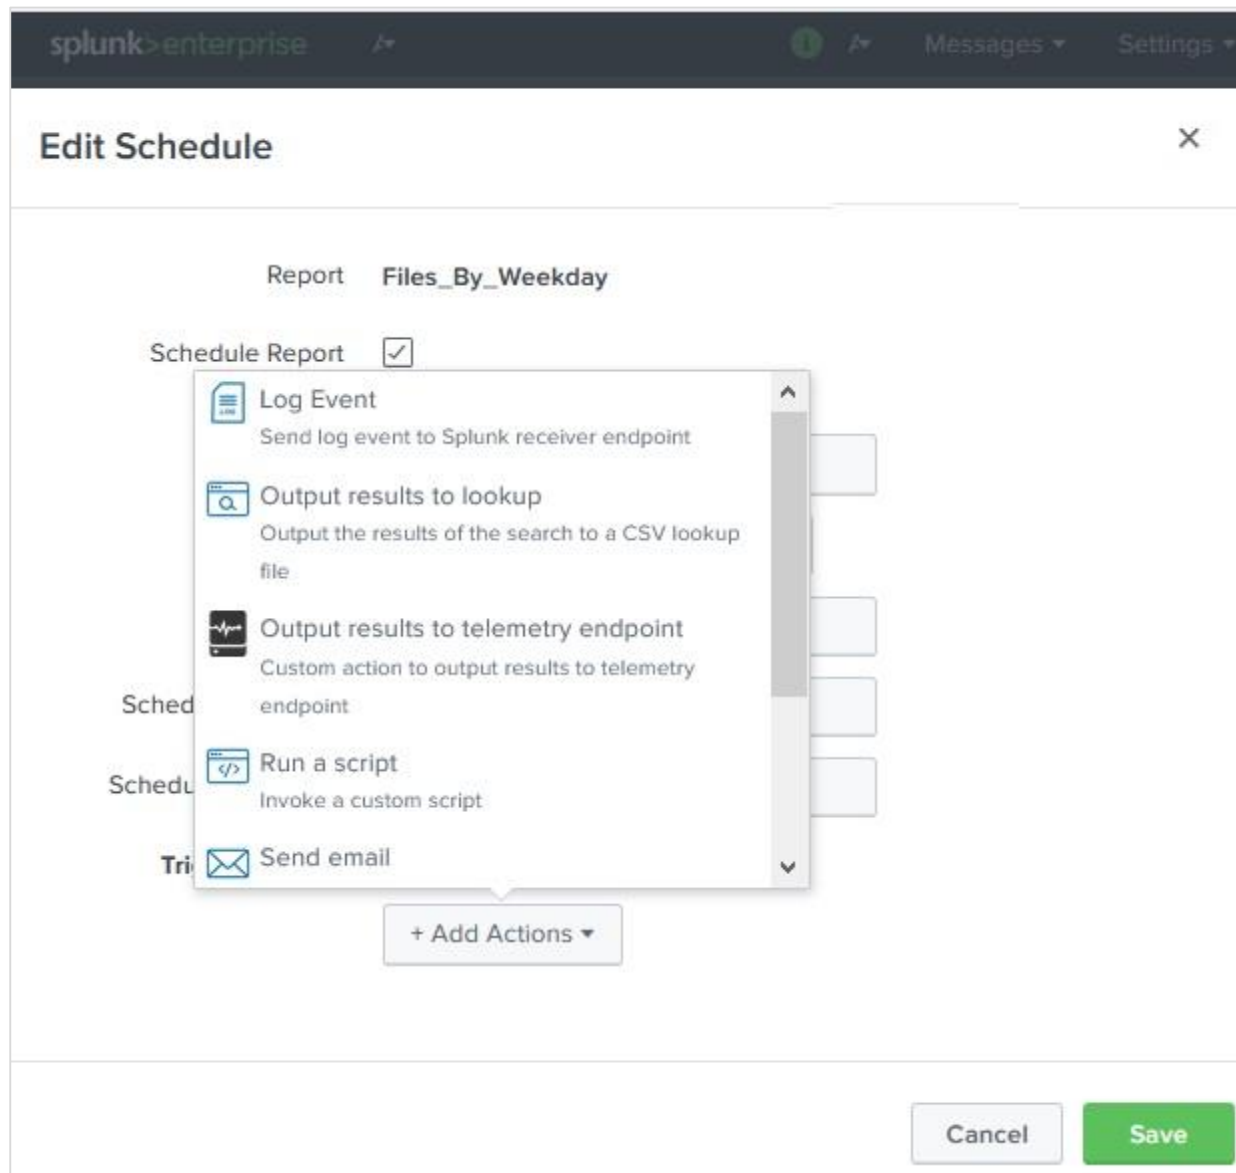

## Alerts

Splunk alerts are actions which get triggered when a specific criterion is met which is defined by the user. The goal of alerts can be logging an action, sending an email or output a result to a lookup file, etc.

### Creating an Alert

You create an alert by running a search query and saving its result as an alert. In the below screenshot, we take the search for daywise file count and save the result as an alert by choosing the **Save As** option.

The screenshot shows the Splunk 'New Search' interface. At the top, there's a navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'Search & Reporting' section is active. Below the navigation bar, the 'New Search' title is followed by a 'Save As' dropdown menu and a 'Close' button. The search query is `host="web_application" | stats count(file) by date_wday`. Below the query, it shows '131,645 events (before 10/25/18 4:07:08.000 PM)' and 'No Event S...'. The 'Statistics (7)' tab is selected. Below the tabs, there's a table with the following data:

| date_wday | count(file) |
|-----------|-------------|
| friday    | 22775       |
| monday    | 17754       |
| saturday  | 16899       |
| sunday    | 17217       |
| thursday  | 21541       |
| tuesday   | 17515       |
| wednesday | 17943       |

In the next screenshot, we configure the alert properties. The below image shows the configuration screen:

Save As Alert

Settings

Title

Alert File Size

Description

Email Alert when the file size report is run

Permissions

Private

Shared in App

Alert type

Scheduled

Real-time

Run every week ▼

On

Monday ▼

at

6:00 ▼

Trigger Conditions

Trigger alert when

Number of Results ▼

is greater than ▼

0

Trigger

Once

For each result

Throttle ?

☐

Trigger Actions

+ Add Actions ▼

Cancel

Save

The purpose and choices of each of these options is explained below:

- **Title:** It is the name of the alert.
- **Description:** It is the detailed description of what the alert does.
- **Permission:** Its value decided who can access, run or edit the alert. If declared private, then only the creator of the alert has all the permissions. To be accessed

by others the option should be changed to **Shared in App**. In this case everyone has read access but only power user has the edit access for the alert.

- **Alert Type:** A scheduled alert runs at a pre-defined interval whose run time is defined by the day and time chosen from the drop downs. But the other option on real-time alert causes the search to run continuously in the background. Whenever the condition is met, the alert action is executed.
- **Trigger condition:** The trigger condition checks for the criteria mentioned in the trigger and sets off the alert only when the alert criteria is met. You can define number of results or number of sources or number of hosts in the search result to trigger the alert. If it is set for once, it will execute only once when the result condition is met but if it is set to **For** each Result, then it will run for every row in the result set where the trigger condition is met.
- **Trigger Actions:** The trigger actions can give a desired output or send an email when the trigger condition is met. The below image shows some of the important trigger actions available in Splunk.

## Save As Alert ×

### Settings

Title

Alert File Size

Description

Email Alert when the file size report is run

Permissions

Private

Shared in App

Alert type

Scheduled

Real-time

Run every week ▼

On

Monday ▼

at

6:00 ▼

Triggers

🔔 Add to Triggered Alerts

Add this alert to Triggered Alerts list

📄 Log Event

Send log event to Splunk receiver endpoint

🔍 Output results to lookup

Output the results of the search to a CSV lookup

📡 Output results to telemetry endpoint

Custom action to output results to telemetry endpoint

📝 Run a script

+ Add Actions ▼

Number of Results ▼

0

For each result

Cancel

Save

# 18. Splunk – Knowledge Management

Splunk knowledge management is about maintenance of knowledge objects for a Splunk Enterprise implementation.

Below are the **main features of knowledge management**:

- Ensure that knowledge objects are being shared and used by the right groups of people in the organization.
- Normalize event data by implementing knowledge object naming conventions and retiring duplicate or obsolete objects.
- Oversee strategies for improved search and pivot performance (report acceleration, data model acceleration, summary indexing, batch mode search).
- Build data models for Pivot users.

## Knowledge Object

---

It is a Splunk object to get specific information about your data. When you create a knowledge object, you can keep it private or you can share it with other users. The examples of knowledge object are: saved searches, tags, field extractions, lookups, etc.

## Uses of Knowledge Objects

---

On using the Splunk software, the knowledge objects are created and saved. But they may contain duplicate information, or they may not be used effectively by all the intended audience. To address such issues, we need to manage these objects. This is done by classifying them properly and then using proper permission management to handle them. Below are the uses and classification of various knowledge objects:

### Fields and field extractions

Fields and field extractions is the first layer of Splunk software knowledge. The fields automatically extracted from the Splunk software from the IT data help bring meaning to the raw data. The manually extracted fields expand and improve upon this layer of meaning.

### Event types and transactions

Use event types and transactions to group together interesting sets of similar events. Event types group together sets of events discovered through searches. Transactions are collections of conceptually-related events that span time.

### Lookups and workflow actions

Lookups and workflow actions are categories of knowledge objects that extend the usefulness of your data in various ways. Field lookups enable you to add fields to your data from external data sources such as static tables (CSV files) or Python-based

commands. Workflow actions enable interactions between fields in your data and other applications or web resources, such as a WHOIS lookup on a field containing an IP address.

## Tags and aliases

Tags and aliases are used to manage and normalize sets of field information. You can use tags and aliases to group sets of related field values together, and to give extracted field tags that reflect different aspects of their identity. For example, you can group events from set of hosts in a particular location (such as a building or city) together by giving the same tag to each host.

If you have two different sources using different field names to refer to same data, then you can normalize your data by using aliases (by aliasing clientip to ipaddress, for example).

## Data models

Data models are representations of one or more datasets, and they drive the Pivot tool, enabling Pivot users to quickly generate useful tables, complex visualizations, and robust reports without needing to interact with the Splunk software search language. Data models are designed by knowledge managers who fully understand the format and semantics of their indexed data. A typical data model makes use of other knowledge object types.

We will discuss some of the examples of these knowledge objects in the subsequent chapters.

# 19. Splunk – Subsearching

Subsearch is a special case of the regular search when the result of a secondary or inner query is the input to the primary or outer query. It is similar to the concept of subquery in case of SQL language. In Splunk, the primary query should return one result which can be input to the outer or the secondary query.

When a search contains a subsearch, the subsearch is run first. Subsearches must be enclosed in square brackets in the primary search.


## Example

We consider the case of finding a file from web log which has maximum byte size. But that may vary every day. Then we want to find only those events where the file size is equal to the maximum size, and is a Sunday.

### Create the Subsearch

We first create the subsearch to find the maximum file size. We use the function **Stat max** with the field named bytes as the argument. This identifies the maximum size of the file for the time frame for which the search query is run.

The below image shows the search and the result of this subsearch:

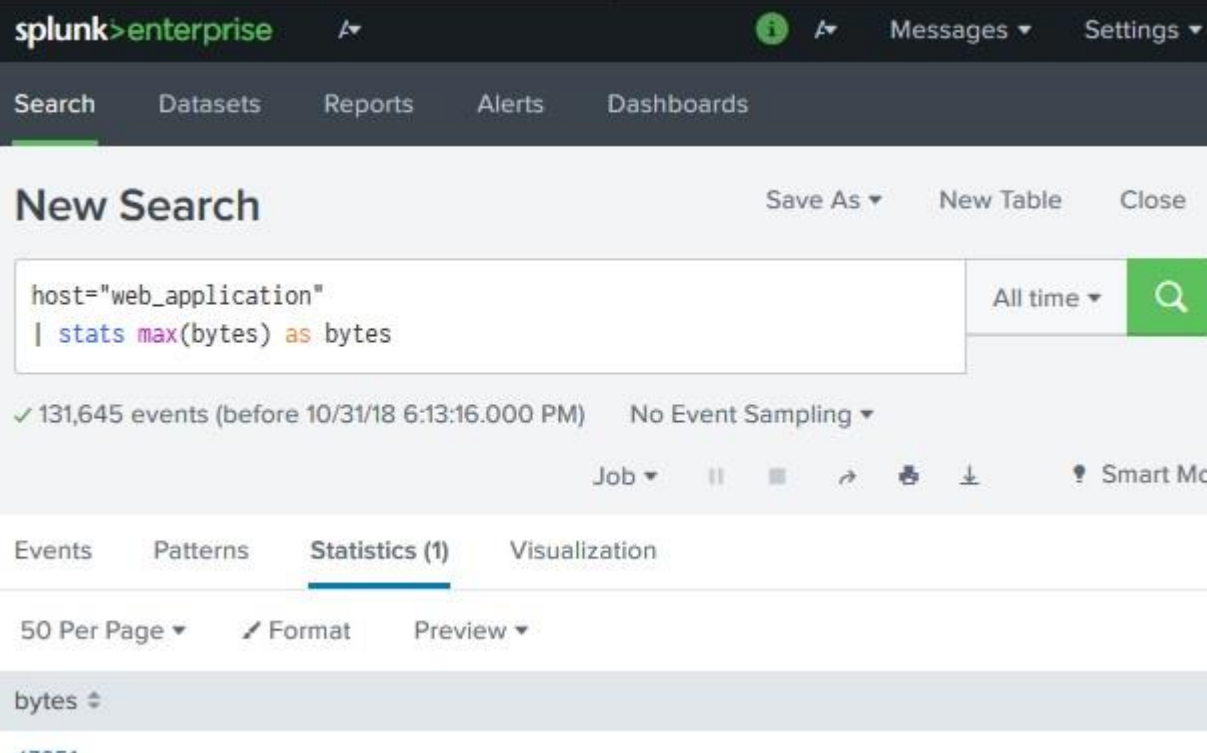

The screenshot displays the Splunk Enterprise web interface. At the top, the navigation bar includes 'splunk>enterprise', a search icon, and links for 'Messages' and 'Settings'. Below this, a secondary navigation bar contains 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The main content area is titled 'New Search' and features a search input field with the query `host="web_application" | stats max(bytes) as bytes`. To the right of the input field is a dropdown menu set to 'All time' and a green search button. Below the search bar, a status bar indicates '✓ 131,645 events (before 10/31/18 6:13:16.000 PM)' and 'No Event Sampling'. A toolbar with various icons for job management and smart mode is also visible. The results are displayed in a table with tabs for 'Events', 'Patterns', 'Statistics (1)', and 'Visualization'. The 'Statistics (1)' tab is active, showing a single row with the value '47251' for the 'bytes' field. The table has a header 'bytes' and a '50 Per Page' dropdown.

## Adding the Subsearch

Next, we add the subsearch query to the primary or the outer query by putting the subsearch inside square brackets. Also the search clause is added to the subsearch query.

The screenshot shows the Splunk Enterprise web interface. At the top, there's a navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'Search' tab is active. Below the navigation bar, the 'New Search' section displays the query: `host="web_application" date_wday="sunday" [search host="web_application" | stats max(bytes) as bytes ]`. The search results show 38 events. A bar chart visualization is displayed above the event list, showing three green bars representing data points over time. The event list below the chart shows three events with their respective timestamps and details.

**Search Query:**

```
host="web_application" date_wday="sunday"
[search host="web_application"
| stats max(bytes) as bytes ]
```

**Results Summary:** 38 events (before 10/31/18 3:41:41.000 PM) No Event Sampling

**Visualization:** Bar chart showing three data points over time.

**Event List:**

| Time                   | Event                                                                                                                                                                                                                                                                                                                                          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10/7/18 3:39:41.000 PM | 27.1.11.11 - - [07/Oct/2018:15:39:41] "GET /passwords.pdf HTTP 1.1" 200 type:pdf+passwords&start=90" "Mozilla/5.0 (Windows NT 6.1; WOW64) AppleWebKit/19.0.1084.52 Safari/536.5" 908<br>bytes = 47251   date_hour = 15   date_mday = 7   date_wday = sunday   file host = web_application   source = access_30DAY.log   sourcetype = access_cr |
| 10/7/18 3:39:10.000 PM | 27.1.11.11 - - [07/Oct/2018:15:39:10] "GET /passwords.pdf HTTP 1.1" 200 type:pdf+passwords&start=90" "Mozilla/5.0 (Windows NT 6.1; WOW64) AppleWebKit/19.0.1084.52 Safari/536.5" 511<br>bytes = 47251   date_hour = 15   date_mday = 7   date_wday = sunday   file host = web_application   source = access_30DAY.log   sourcetype = access_cr |
| 10/7/18 2:13:02.000 PM | 203.45.206.135 - - [07/Oct/2018:14:13:02] "GET /passwords.pdf HTTP 1.1" filetype:pdf+passwords&start=90" "Mozilla/4.0 (compatible; MSIE 6.0; Win bytes = 47251   date_hour = 14   date_mday = 7   date_wday = suncay   file host = web_application   source = access_30DAY.log   sourcetype = access_cr                                        |


As we see, the result contains only the events where the file size is equal to the max file size found by considering all the events, and the event day is a Sunday.

## 20. Splunk – Search Macros

Search macros are reusable blocks of Search Processing Language (SPL) that you can insert into other searches. They are used when you want to use the same search logic on different parts or values in the data set dynamically. They can take arguments dynamically and the search result will be updated as per the new values.

### Macro Creation

To create the search macro, we go to the **Settings -> Advanced Search -> Search Macros -> Add New**. This brings up the below screen where we start creating the macro.

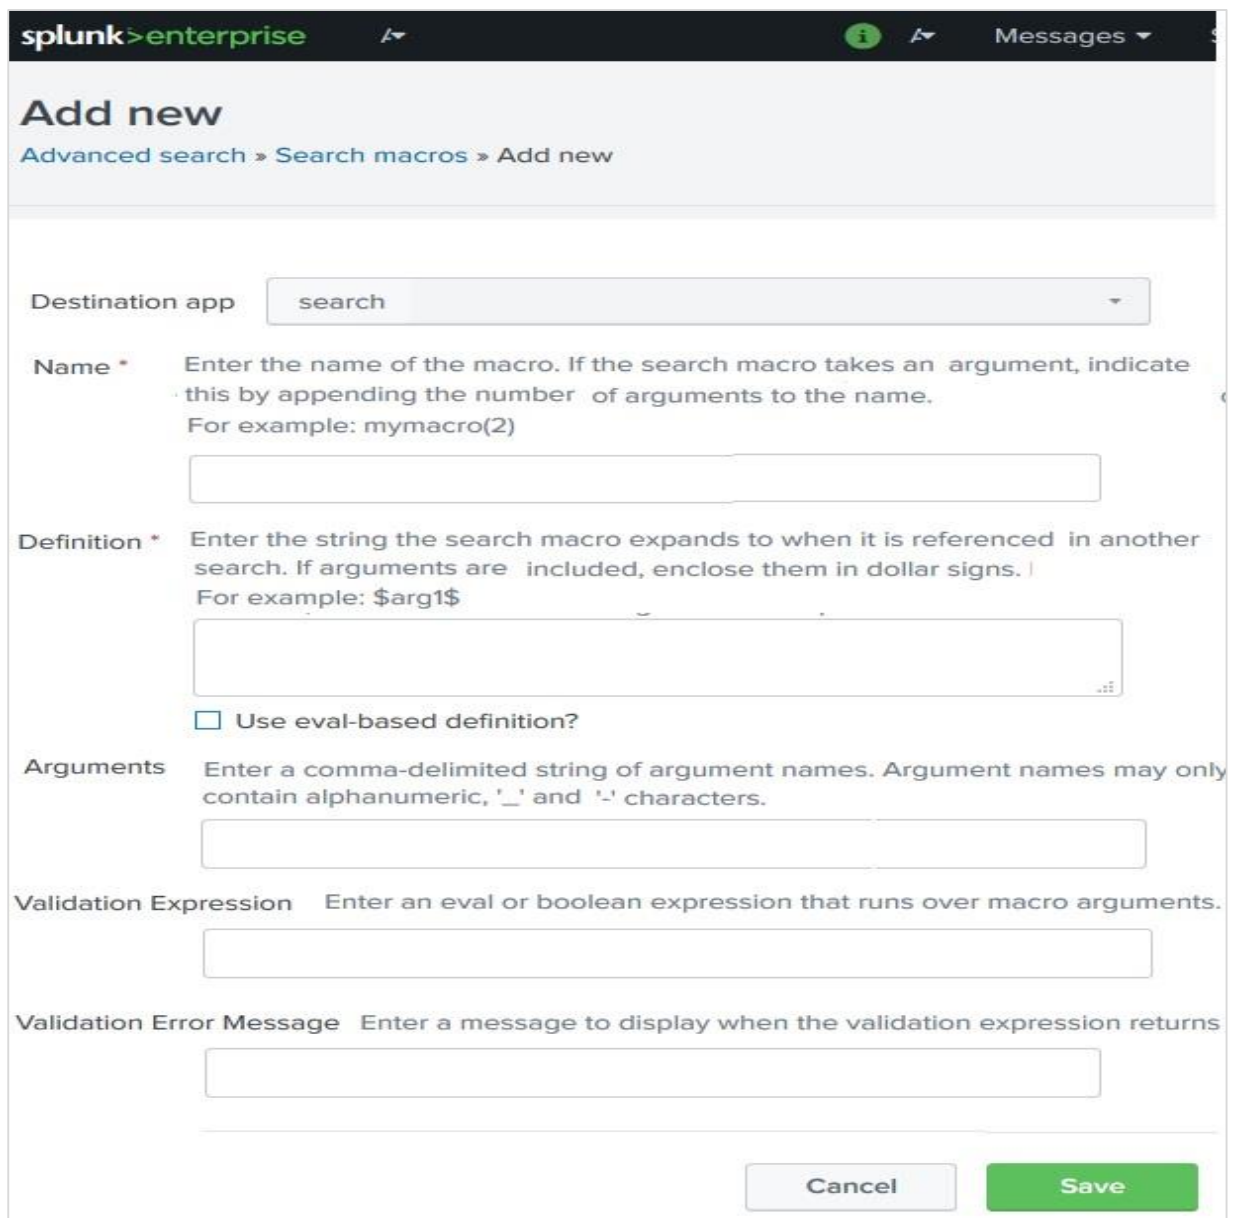

The screenshot shows the 'Add new' macro creation interface in Splunk Enterprise. The breadcrumb trail is 'Advanced search > Search macros > Add new'. The form includes the following fields:

- Destination app:** A dropdown menu currently set to 'search'.
- Name \*:** A text input field with instructions: 'Enter the name of the macro. If the search macro takes an argument, indicate this by appending the number of arguments to the name. For example: mymacro(2)'.
- Definition \*:** A text input field with instructions: 'Enter the string the search macro expands to when it is referenced in another search. If arguments are included, enclose them in dollar signs. For example: \$arg1\$'.
- Use eval-based definition?:** An unchecked checkbox.
- Arguments:** A text input field with instructions: 'Enter a comma-delimited string of argument names. Argument names may only contain alphanumeric, '\_' and '-' characters.'
- Validation Expression:** A text input field with instructions: 'Enter an eval or boolean expression that runs over macro arguments.'
- Validation Error Message:** A text input field with instructions: 'Enter a message to display when the validation expression returns'.

At the bottom right, there are 'Cancel' and 'Save' buttons.

## Macro Scenario

---

We want to show various stats about the file size from the **web\_applications** log. The stats are about max, min and avg value of the filesize using the bytes field in the log. The result should display these stats for each file listed in the log.

So here the type of the stats is dynamic in nature. The name of the stats function will be passed as an argument to the macro.

## Defining the Macro

---

Next, we define the macro by setting various properties as shown in the below screen. The name of the macro contains (1), indicating that there is one argument to be passed into the macro when it is used in the search string. **fun** is the argument which will be passed on to the macro during execution in the search query.

**splunk**>enterprise

Messages ▾

## Add new

[Advanced search](#) » [Search macros](#) » Add new

Destination app search ▾

**Name \*** Enter the name of the macro. If the search macro takes an argument, indicate this by appending the number of arguments to the name.  
For example: mymacro(2)

**Definition \*** Enter the string the search macro expands to when it is referenced in another search. If arguments are included, enclose them in dollar signs.  
For example: \$arg1\$

☐ Use eval-based definition?

**Arguments** Enter a comma-delimited string of argument names. Argument names may only contain alphanumeric, '\_' and '-' characters.

**Validation Expression** Enter an eval or boolean expression that runs over macro arguments.

**Validation Error Message** Enter a message to display when the validation expression returns

Cancel Save

91

**tutorialspoint**  
SIMPLYEASYLEARNING

## Using the Macro

To use the macro, we make it a part of the search string. On passing different values for the argument we see different results as expected.

Consider finding the average size in bytes of the files. We pass avg as the argument and get the result as shown below. The macro has been kept under ` sign as part of the search query.

The screenshot shows the Splunk Enterprise web interface. The search bar contains the query: `host="web_application" | `filesize(avg)``. The results show 48,444 events from 10/2/18 12:00:00.000 AM to 11/1/18 10:37:50.000 PM. The 'Statistics (30)' tab is selected, displaying a table of file names and their average sizes in bytes.

| file             | avg(bytes)         |
|------------------|--------------------|
| ADMIN            | 3406               |
| Admin            | 3406               |
| account          | 2119               |
| adm              | 3406               |
| admin            | 3406               |
| administration   | 3406               |
| anna_nicole.html | 1990.7888888888888 |
| api              | 1456               |
| bdoor            | 3406               |
| cart.do          | 2083.075435525548  |

Similarly, if we want the maximum file size for each of the files present in the log, then we use **max** as the argument. The result is as shown below.

# 21. Splunk – Event Types

In Splunk search, we can design our own events from a dataset based on certain criteria. For example, we search for only the events which have a http status code of 200. This event now can be saved as an event type with a user defined name as **status200** and use this event name as part of future searches.

In short, an event type represents a search that returns a specific type of event or a useful collection of events. Every event that can be returned by the search gets an association with that event type.

## Creating Event Type

---

There are two ways to create an event type after we have decided the search criteria. One is to **run a** search and then save it as an Event Type. Another is to **add a new Event Type from the settings tab**. We will see both the ways of creating it in this section.

### Using a Search

Consider the search for the events which have the criteria of successful http status value of 200 and the event type run on a Wednesday. After running the search query, we can choose **Save As** option to save the query as an Event Type.

**New Search**

Save As ▾

host="web\_application" status=200 date\_wday="Wednesday"

12:00:00.000 AM to 11/4/18 1:53:47.000 PM) No Event Sampling

Job ▾ || ■ ↻ 🖨 ⬇ ⚙ Smart Match

Report  
Dashboard Panel  
Alert  
**Event Type**

Terms Statistics Visualization

– Zoom Out + Zoom to Selection × Deselect


Oct 8 Mon Oct 15 Mon Oct 22

ist ▾ / Format 20 Per Page ▾ < Prev 1 2 3 4 5

| Event        |                 |             |                        |                                               |                  |             |           |                                                               |                                                                                |
|--------------|-----------------|-------------|------------------------|-----------------------------------------------|------------------|-------------|-----------|---------------------------------------------------------------|--------------------------------------------------------------------------------|
| 88.191.83.82 | -               | -           | [10/Oct/2018:23:57:34] | "GET /product.screen?productId=MB-AG-T01"     | HTTP 1.1"        | 200         | 3835      | "http://www.buttercupgames.com/category.screen?categoryId=TI" | el Mac OS X 10_7_4) AppleWebKit/536.5 (KHTML, like Gecko) Chrome/19.0.1084.46  |
| bytes =      | 3835            | date_hour = | 23                     | date_mday =                                   | 10               | date_wday = | wednesday | file =                                                        |                                                                                |
| host =       | web_application | productId = | MB-AG-T01              | source =                                      | access_30DAY.log | sta         |           |                                                               |                                                                                |
| 88.191.83.82 | -               | -           | [10/Oct/2018:23:57:15] | "GET /cart.do?action=view&productId=MB-F4953" | HTTP 1.1"        | 200         | 1569      | "http://www.buttercupgames.com/cart.do?action=view&pr"        | (Macintosh; Intel Mac OS X 10_7_4) AppleWebKit/536.5 (KHTML, like Gecko) Chrom |
| bytes =      | 1569            | date_hour = | 23                     | date_mday =                                   | 10               | date_wday = | wednesday | file =                                                        |                                                                                |
| host =       | web_application | productId = | MB-AG-G07              | source =                                      | access_30DAY.log | sti         |           |                                                               |                                                                                |

The next screen prompts to give a name for the Event Type, choose a Tag which is optional and then choose a colour with which the events will be highlighted. The priority option

decides which event type will be displayed first in case two or more event types match the same event.

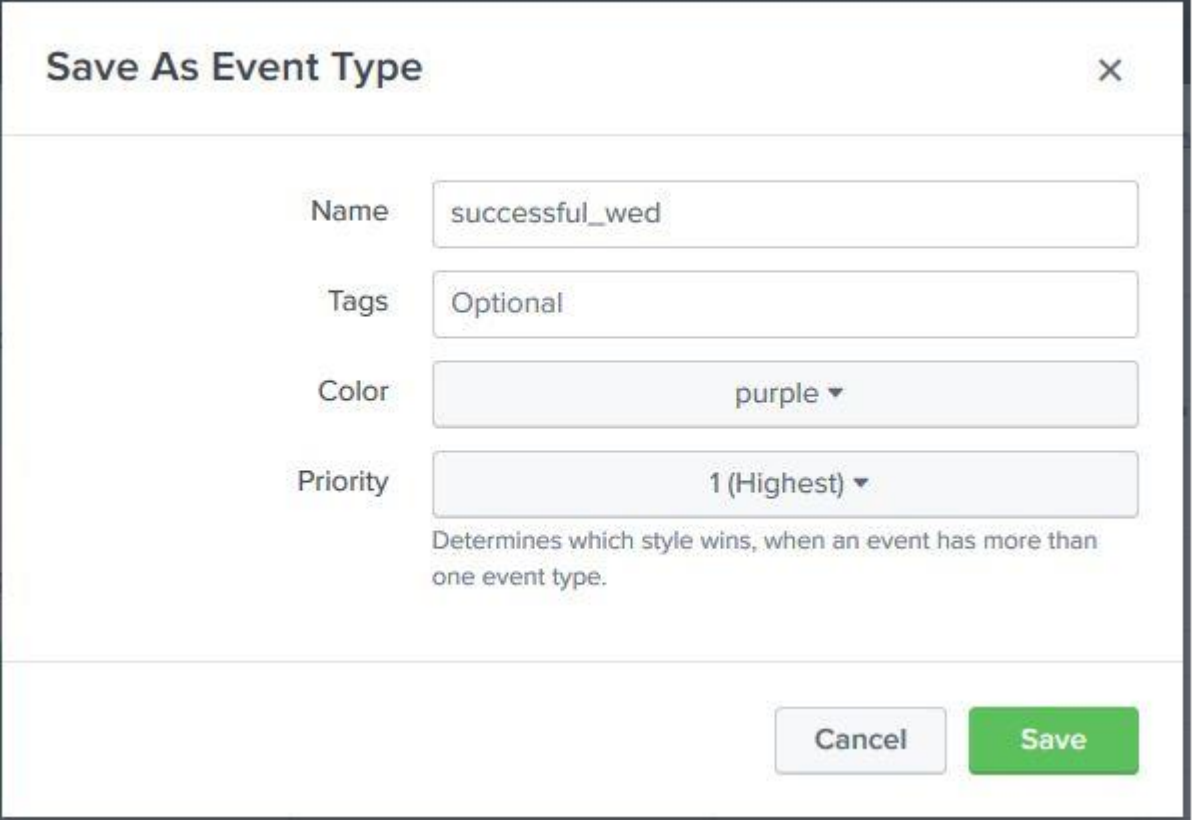

The image shows a 'Save As Event Type' dialog box with a close button (X) in the top right corner. It contains four input fields: 'Name' with the value 'successful\_wed', 'Tags' with the value 'Optional', 'Color' with a dropdown menu showing 'purple', and 'Priority' with a dropdown menu showing '1 (Highest)'. Below the 'Priority' dropdown is a descriptive text: 'Determines which style wins, when an event has more than one event type.' At the bottom right, there are two buttons: 'Cancel' and 'Save'.

|          |                |
|----------|----------------|
| Name     | successful_wed |
| Tags     | Optional       |
| Color    | purple ▼       |
| Priority | 1 (Highest) ▼  |


Determines which style wins, when an event has more than one event type.

Cancel Save

Finally, we can see the Event Type has been created by going to the **Settings -> Event Types** option.

## Using New Event Types

The other option to create a new Event Type is to use the **Settings -> Event Types** option as shown below where we can add a new Event Type:

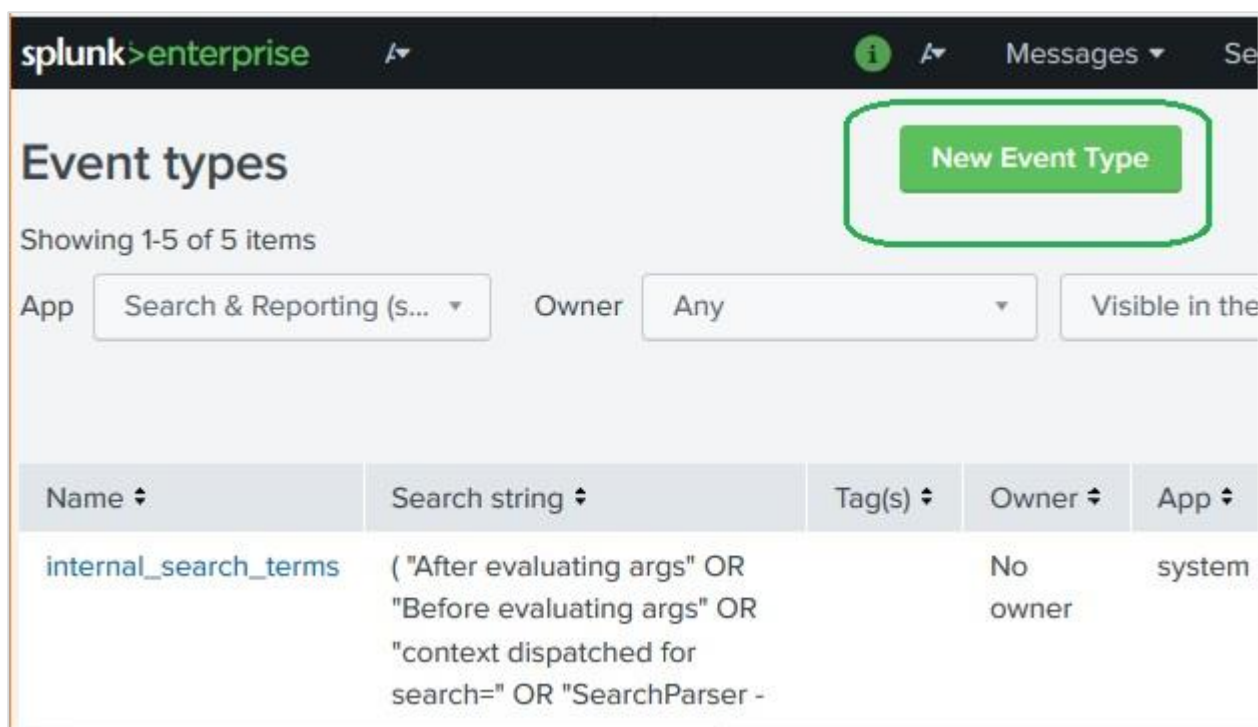

splunk>enterprise

Messages


## Event types

Showing 1-5 of 5 items

App: Search & Reporting (s... | Owner: Any | Visible in the

| Name                  | Search string                                                                                               | Tag(s) | Owner    | App    |
|-----------------------|-------------------------------------------------------------------------------------------------------------|--------|----------|--------|
| internal_search_terms | ("After evaluating args" OR "Before evaluating args" OR "context dispatched for search=" OR "SearchParser - |        | No owner | system |

On clicking the button **New Event Type**, we get the following screen to add the same query as in the previous section.

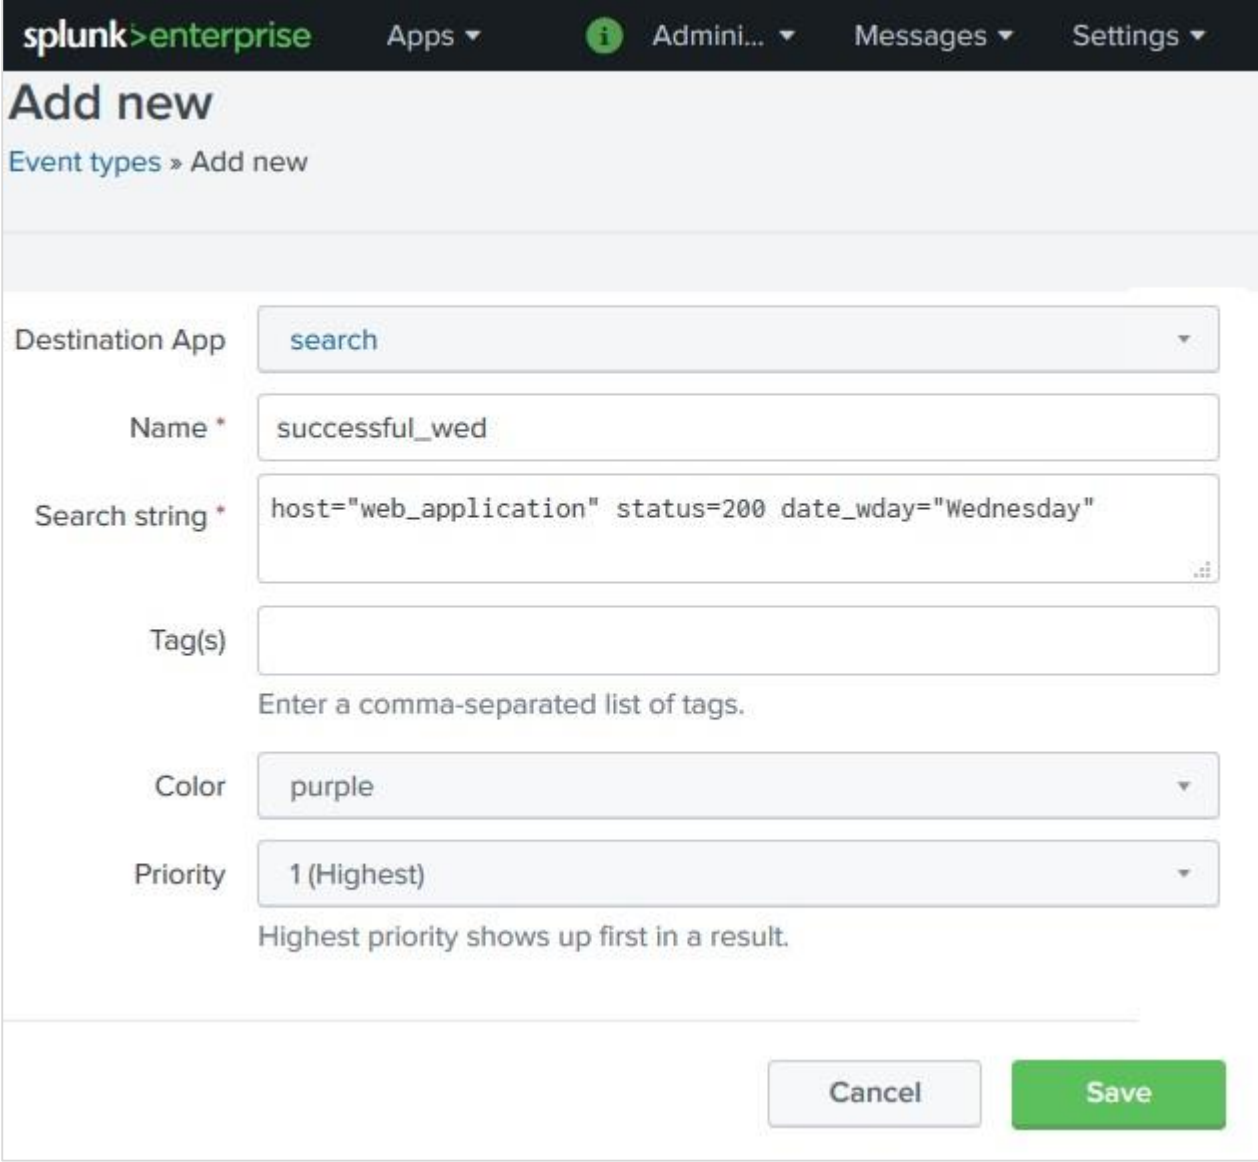

The screenshot shows the 'Add new' page in the Splunk Enterprise interface. The top navigation bar includes the 'splunk>enterprise' logo and links for 'Apps', 'Admini...', 'Messages', and 'Settings'. The main heading is 'Add new', with a breadcrumb 'Event types » Add new'. The form contains several fields: 'Destination App' is a dropdown menu set to 'search'; 'Name' is a text field with 'successful\_wed'; 'Search string' is a text field with the query 'host="web\_application" status=200 date\_wday="Wednesday"'; 'Tag(s)' is an empty text field with a hint 'Enter a comma-separated list of tags.'; 'Color' is a dropdown menu set to 'purple'; and 'Priority' is a dropdown menu set to '1 (Highest)' with a hint 'Highest priority shows up first in a result.'. At the bottom right are 'Cancel' and 'Save' buttons.

splunk>enterprise Apps Admini... Messages Settings

## Add new

Event types » Add new

Destination App search

Name \* successful\_wed

Search string \* host="web\_application" status=200 date\_wday="Wednesday"

Tag(s)

Enter a comma-separated list of tags.

Color purple

Priority 1 (Highest)

Highest priority shows up first in a result.

Cancel Save

## Viewing the Event Type

To view the event we just created above, we can write the below search query in the search box and we can see the resulting events along with the colour we have chosen for the event type.

splunk>enterprise Messages

Search Datasets Reports Alerts Dashboards

## New Search Save As New Table Close

eventtype="successful\_wed" Previous month Q

✓ 7,442 events (10/1/18 12:00:00.000 AM to 11/1/18 12:00:00.000 AM) No Event Sampling

Job || ■ ↶ ⏏ ↓ Smart Mode

Events (7,442) Patterns Statistics Visualization

Format Timeline — Zoom Out + Zoom to Selection × Deselect


Mon Oct 1 2018 Mon Oct 8 Mon Oct 15

> Show Fields List Format 20 Per Page < Prev

| i | Time                        | Event                                                                                                                                                                                                                                                                                        |
|---|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/10/18<br>11:57:34.000 PM | 88.191.83.82 - - [10/Oct/2018:23:57:34] "GET /product.sc HTTP 1.1" 200 3835 "http://www.buttercupgames.com/category Mac OS X 10_7_4) AppleWebKit/536.5 (KHTML, like Gecko bytes = 3835   date_hour = 23   date_mday = 10   date_w host = web_application   productId = MB-AG-T01   source =  |
| > | 10/10/18<br>11:57:15.000 PM | 88.191.83.82 - - [10/Oct/2018:23:57:15] "GET /cart.do?ac F4953 HTTP 1.1" 200 1569 "http://www.buttercupgames.com/ (Macintosh; Intel Mac OS X 10_7_4) AppleWebKit/536.5 (KH bytes = 1569   date_hour = 23   date_mday = 10   date_w host = web_application   productId = MB-AG-G07   source = |

## Using the Event Type


We can use the Event type along with other queries. Here we specify some partial criteria from the Event Type and the result is a mix of events which shows the coloured and non-coloured events in the result.

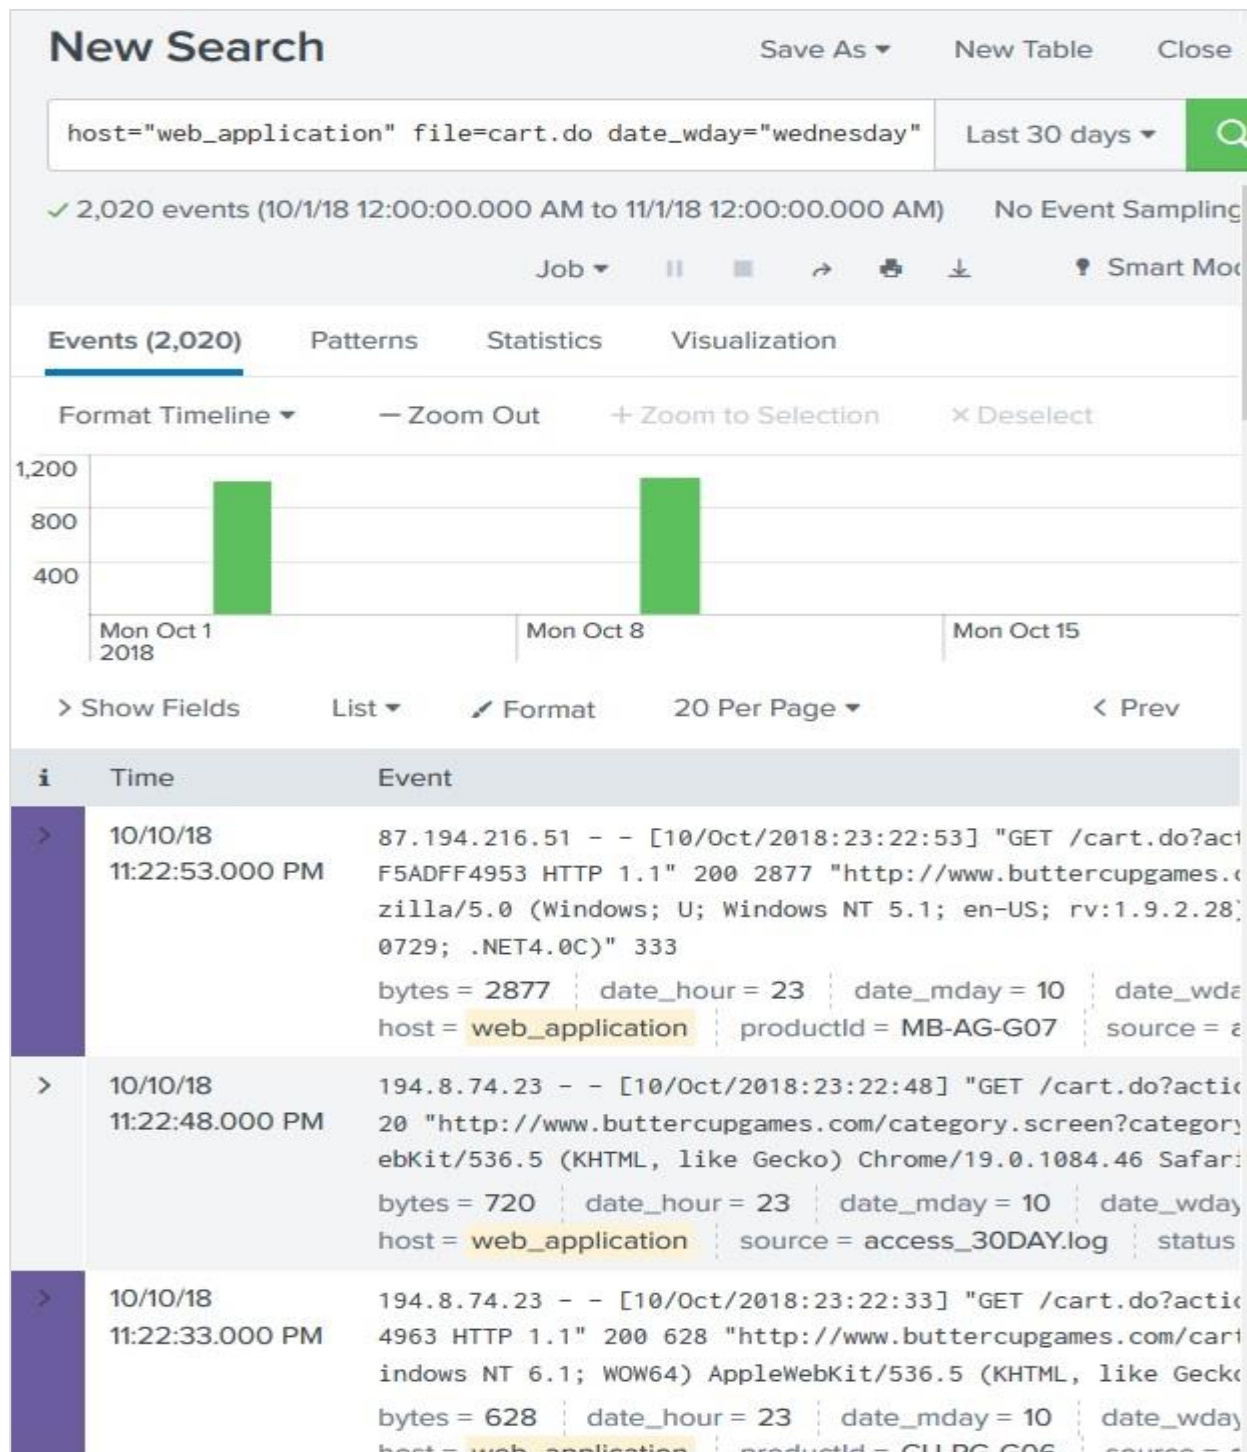

## 22. Splunk – Basic Chart


Splunk has great visualization features which shows a variety of charts. These charts are created from the results of a search query where appropriate functions are used to give numerical outputs.

For example, if we look for the average file size in bytes from the data set named web\_applications, we can see the result in the statistics tab as shown below:

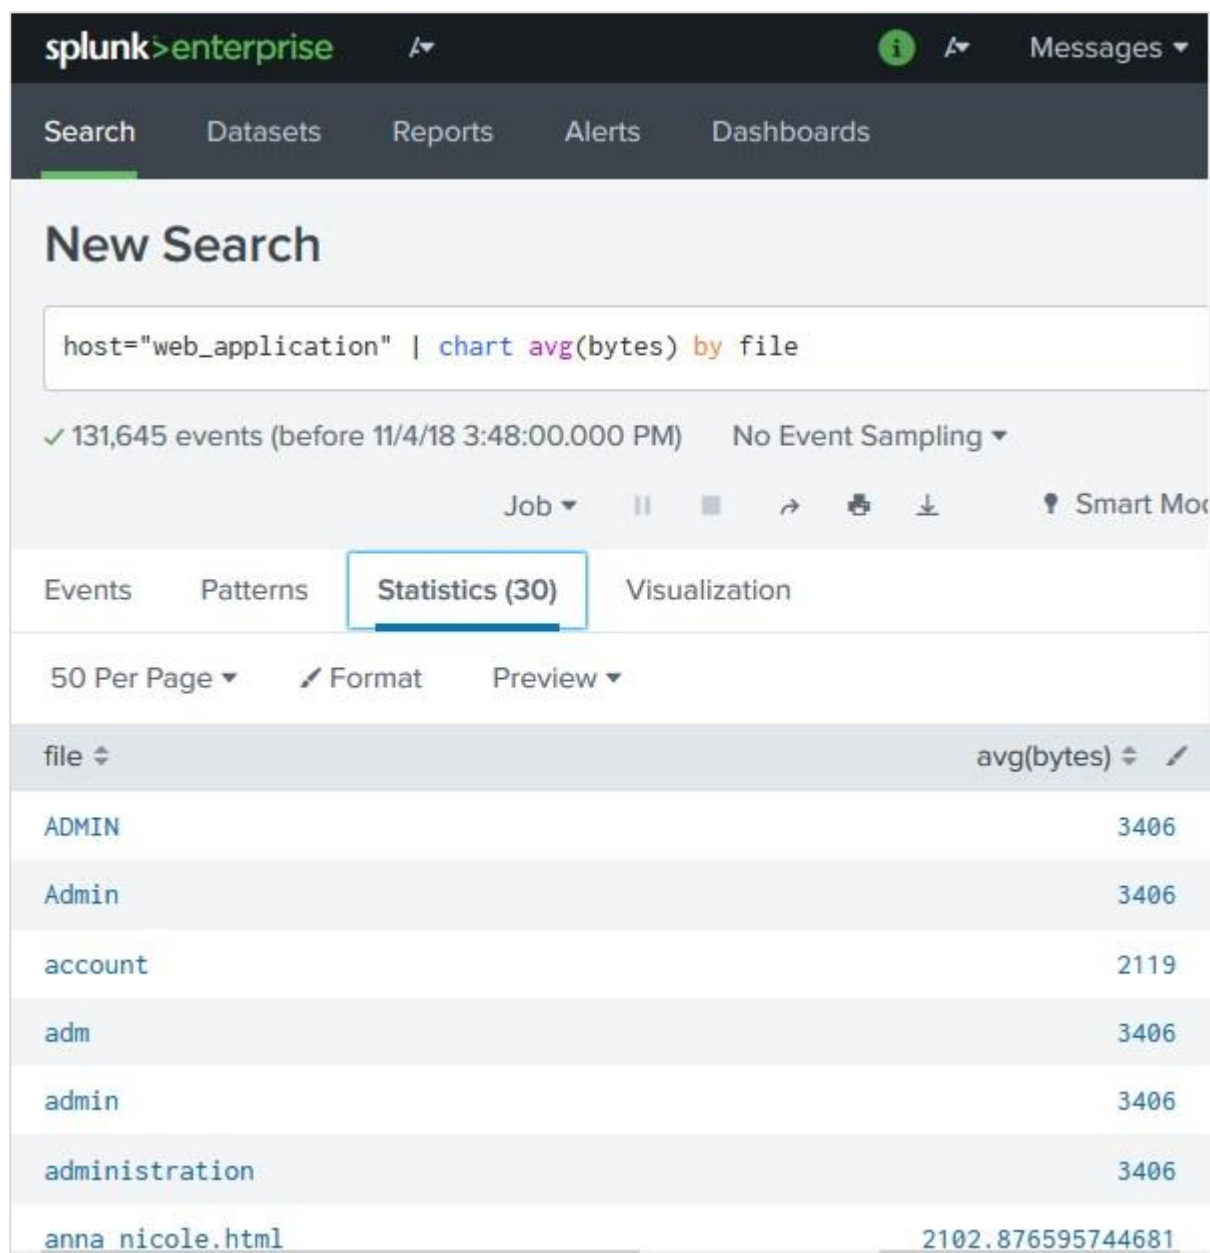

## Creating Charts

In order to create a basic chart, we first ensure that the data is visible in the statistics tab as shown above. Then we click on the Visualization tab to get the corresponding chart. The above data produces a pie chart by default as shown below.

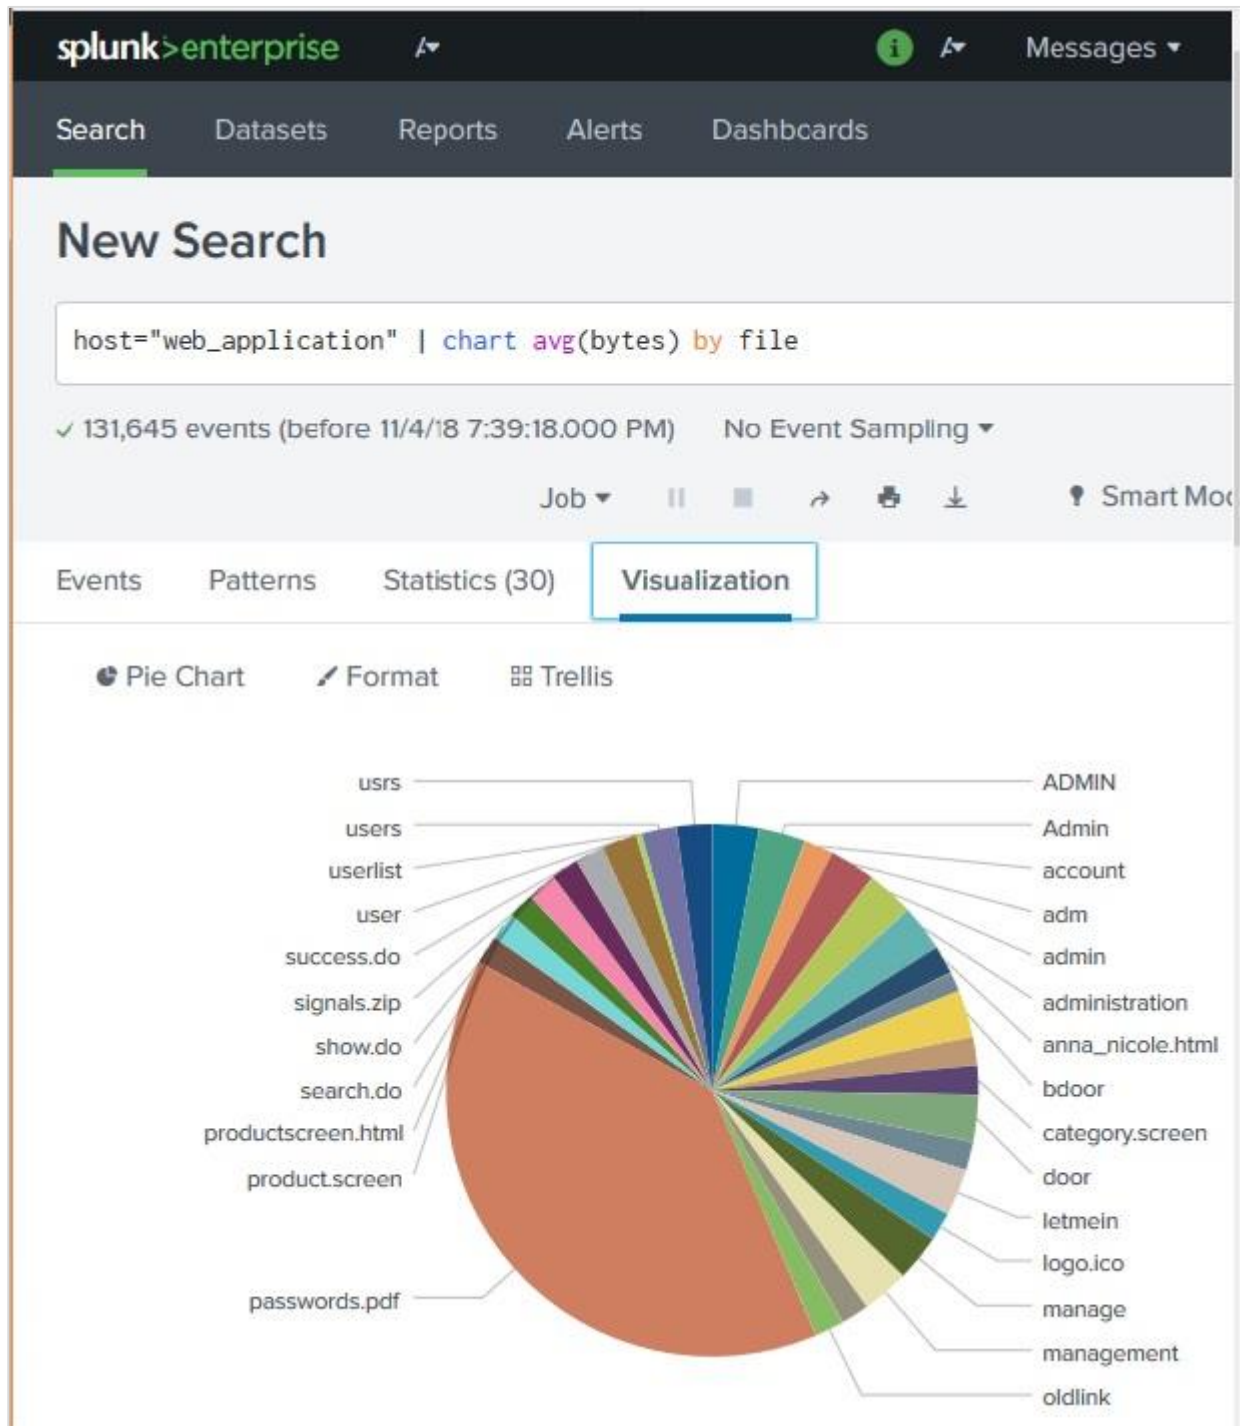


## Changing the Chart Type

We can change the chart type by selecting a different chart option from the chart name. Clicking on one of these options will produce the chart for that type of graph.

The screenshot displays the Splunk Enterprise web interface. At the top, the navigation bar includes 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'New Search' section shows a search query: `host="web_application" | chart avg(bytes) by file`. Below the query, it indicates '131,645 events (before 11/4/18 7:39:18.000 PM)' and 'No Event Sampling'. The 'Visualization' tab is selected, and a dropdown menu is open, showing various chart types. The 'Pie Chart' option is highlighted, and a preview of a pie chart is shown on the right. The dropdown menu also includes a 'Format' button and a 'Trellis' button. The 'Pie Chart' description states: 'Compare categories in a dataset. Search Fragment | stats count by comparison\_category'.

## Formatting a Chart

The charts can also be formatted by using the Format option. This option allows to set the values for the axes, set the legends or show the data values in the chart. In the below example, we have chosen the horizontal chart and selected the option to show the data values as a Format option.

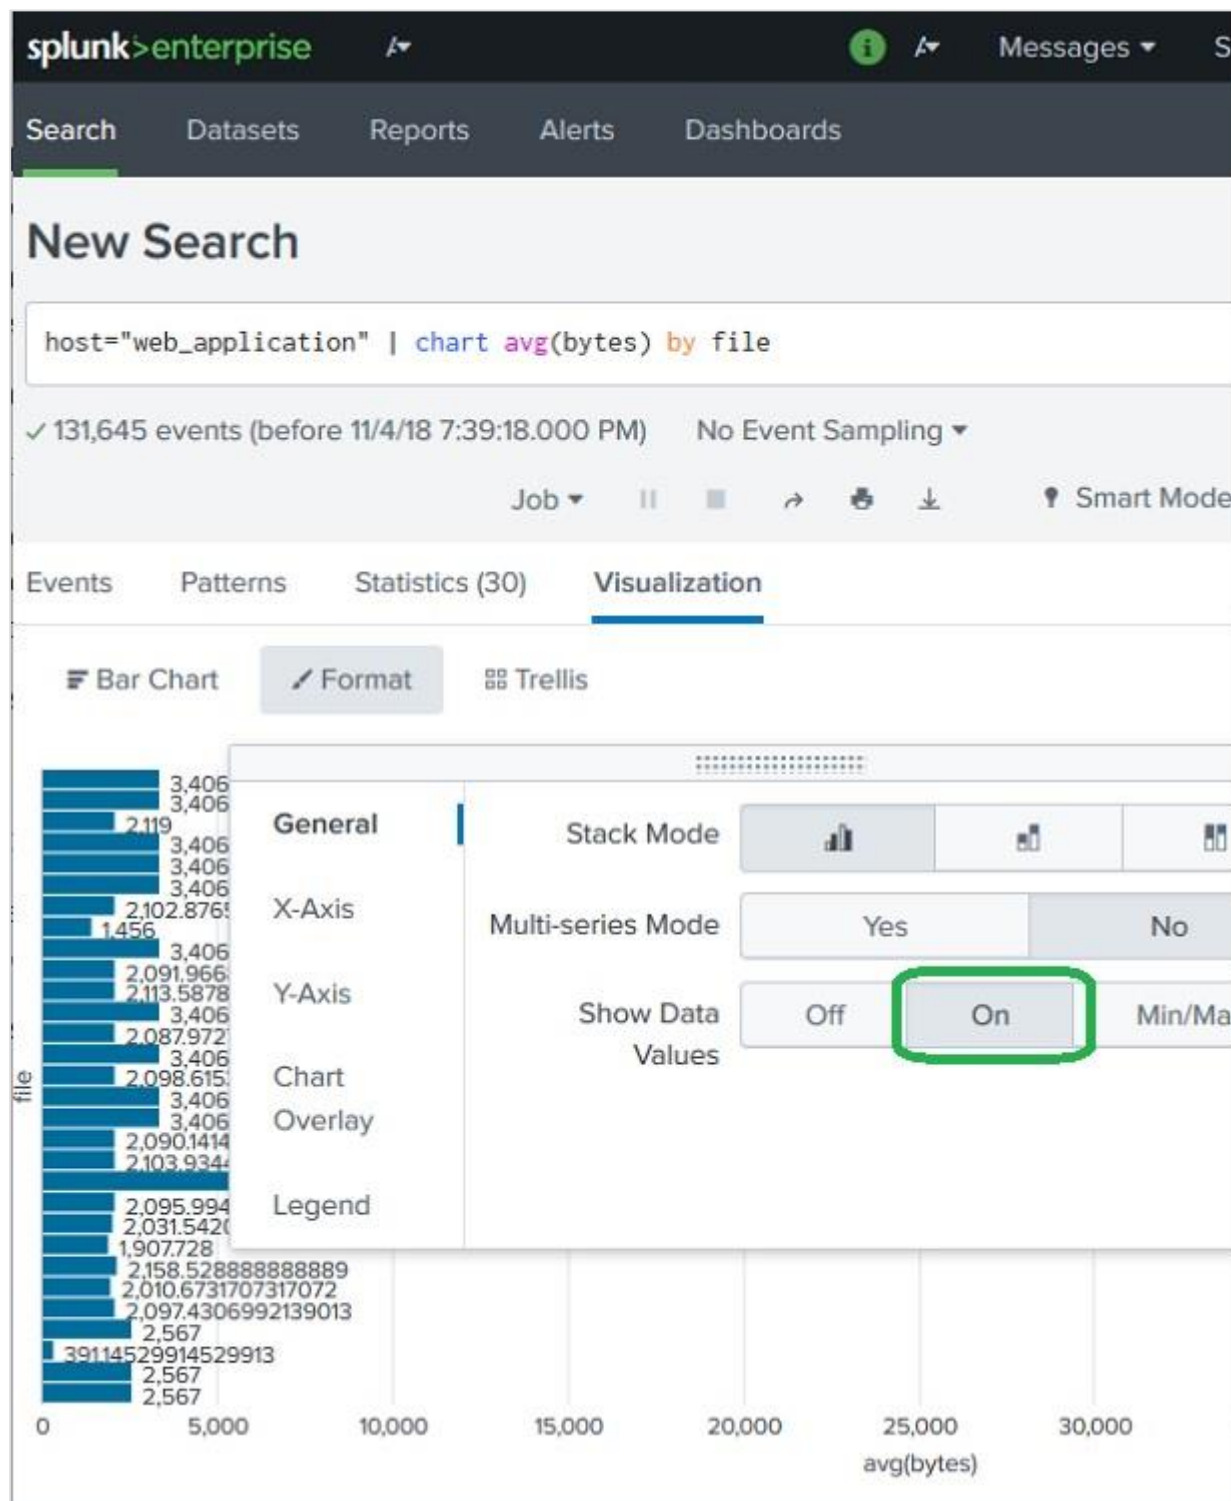


## 23. Splunk – Overlay Chart

Many times, we need to put one chart over another to compare or see the trend of the two charts. Splunk supports this feature through the chart overlay feature available in its visualization tab. To create such a chart, we need to first make a chart with two variables and then add a third variable which can create the overlay chart.


### Chart Scenario

---

Continuing the examples from previous chapter, we find out the byte size of the files on different week days and then also add the average byte size for those days. The below image shows the chart showing the byte size versus average byte size of files on different days of the week.

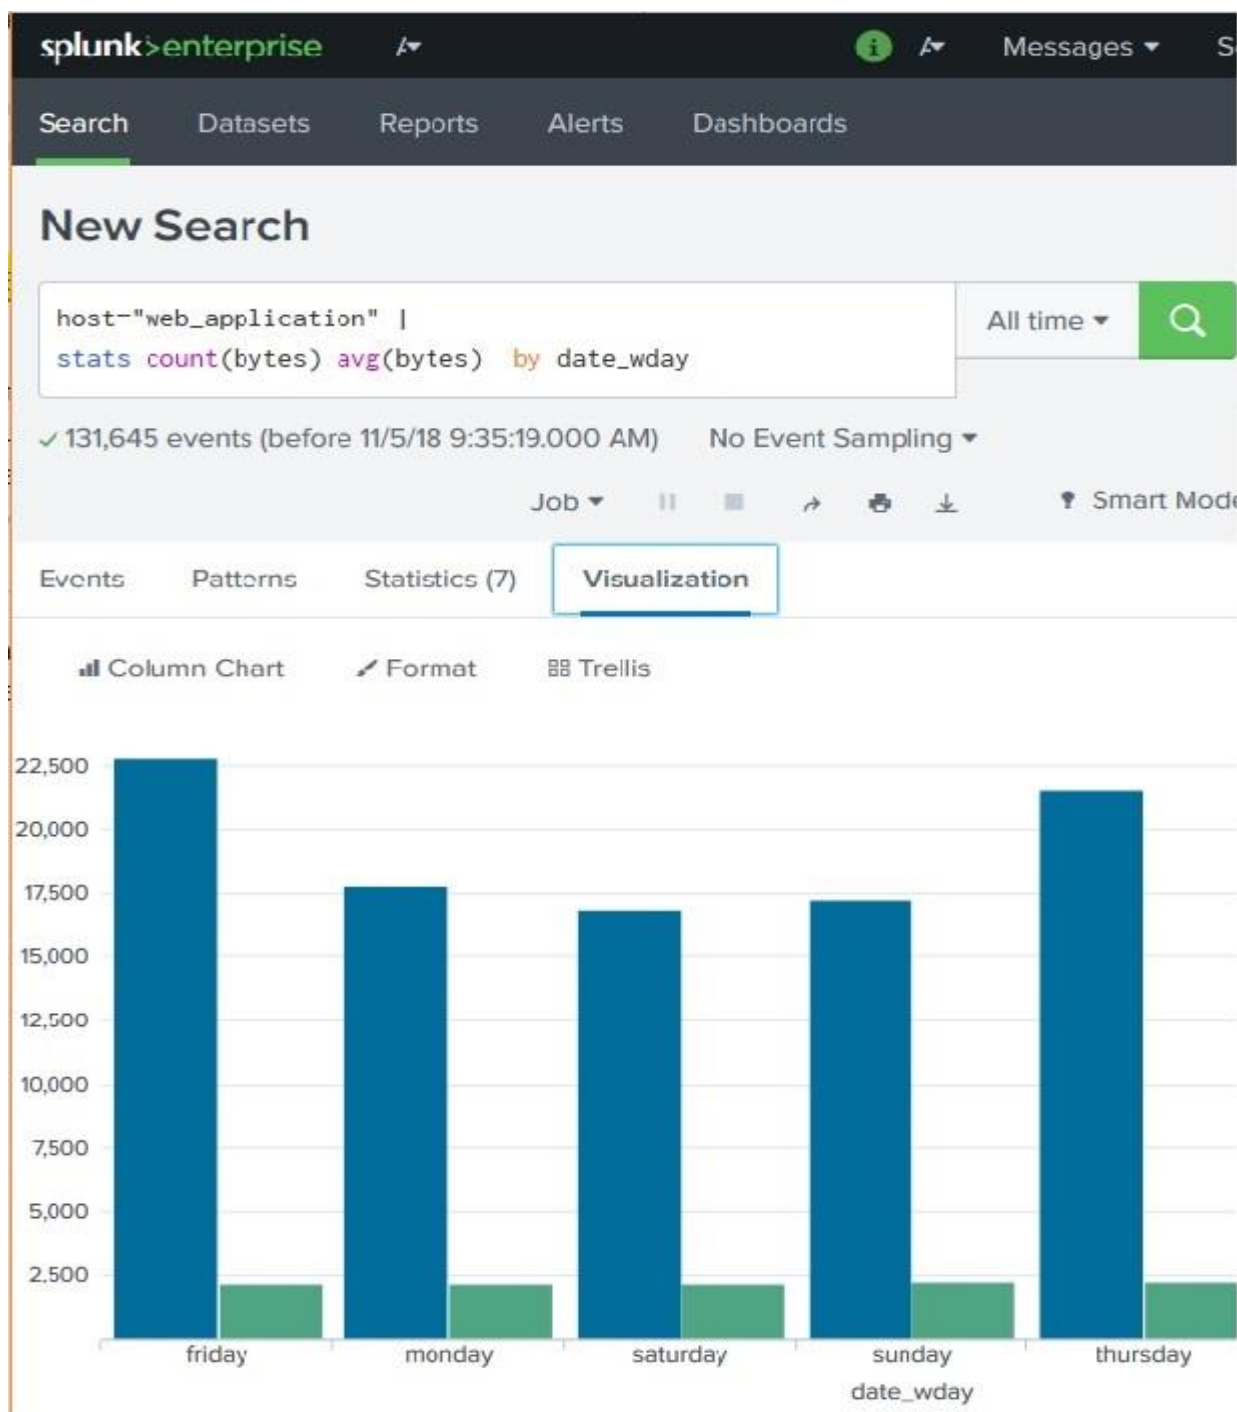

Next, we are going to add the statistical function called standard deviation to the above search query. This will bring the additional variable needed to create the chart overlay. The below image shows the statistics of the query result which will be used in the visualization.

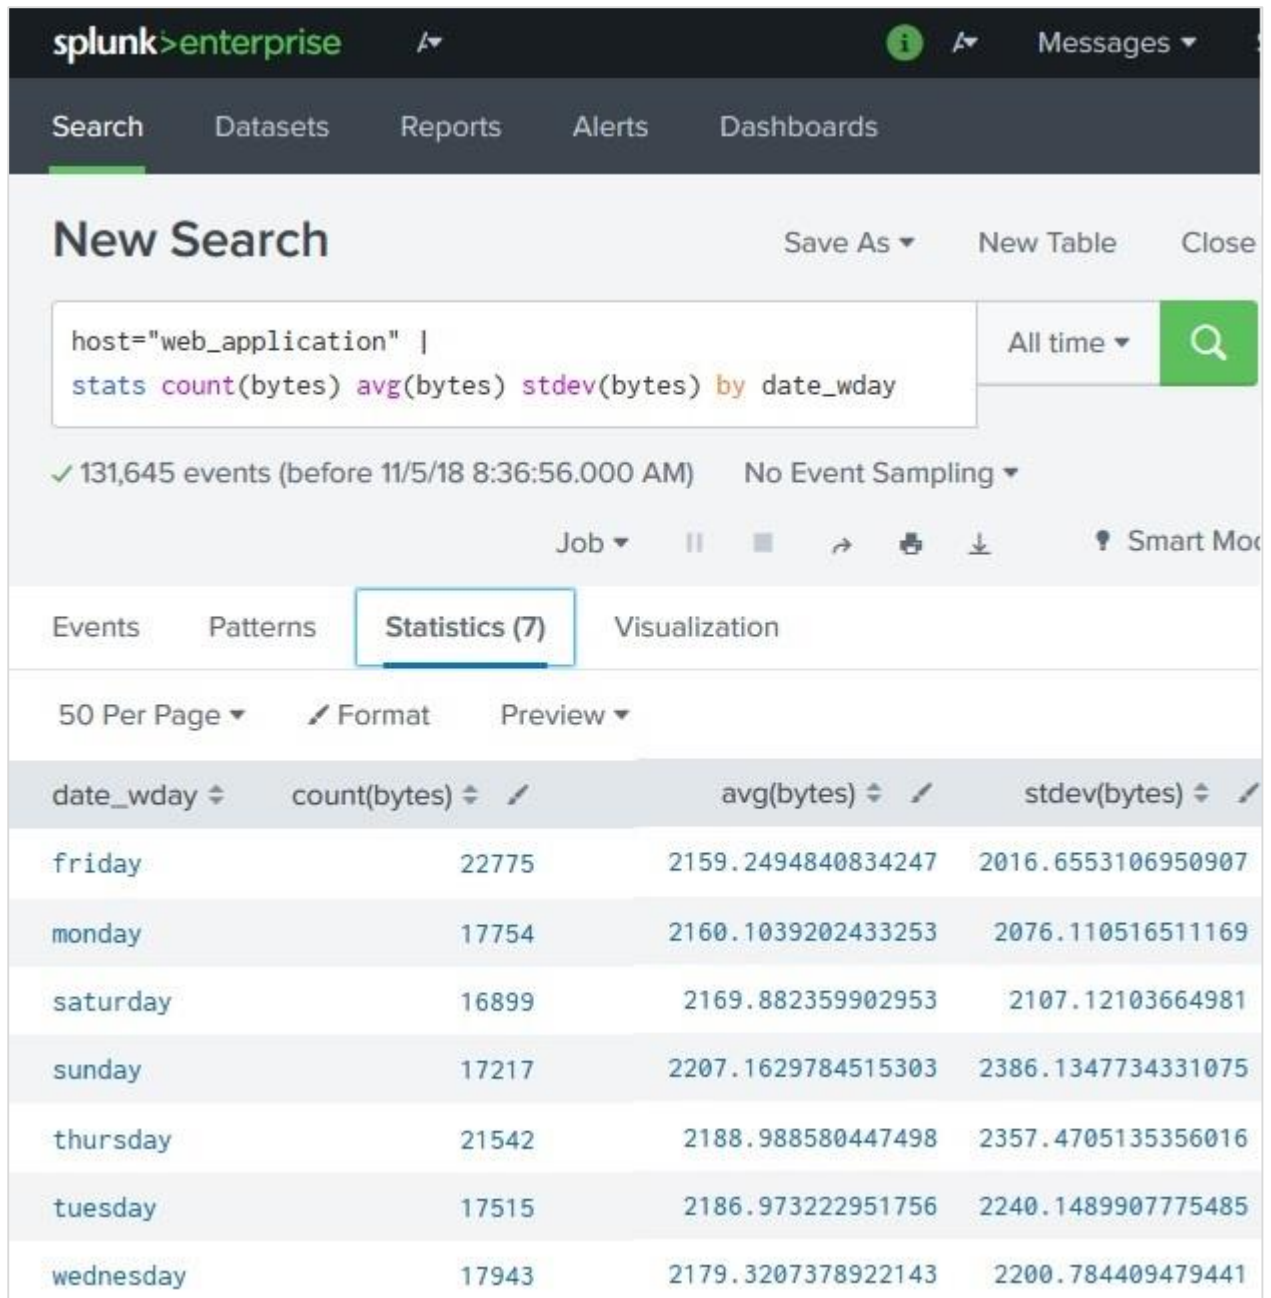


## Creating Chart Overlay

To create the chart overlay, we follow **Visualization -> Format -> Chart Overlay**

This brings up a pop-up window where we need to choose the field which will be the overlay chart. In this case, we choose stdev(bytes) as the field as shown in the image below. We can also fill in other values: title, scale and their intervals, minimum values, maximum values, etc. For our example, we choose the default values after selecting the field for the overlay option.

The screenshot shows the Splunk Enterprise interface. At the top, the navigation bar includes 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. The 'New Search' page displays a search query: `host="web_application" | stats count(bytes) avg(bytes) stdev(bytes) by date_wday`. Below the query, it indicates 131,645 events and 'No Event Sampling'. The 'Visualization' tab is active, and the 'Format' button is highlighted. A 'Chart Overlay' window is open, showing the 'stdev(bytes)' field selected for overlay, with 'View as Axis' set to 'On'.

After selecting the above options, we can close the chart overlay pop-up window and see the final chart as shown below:

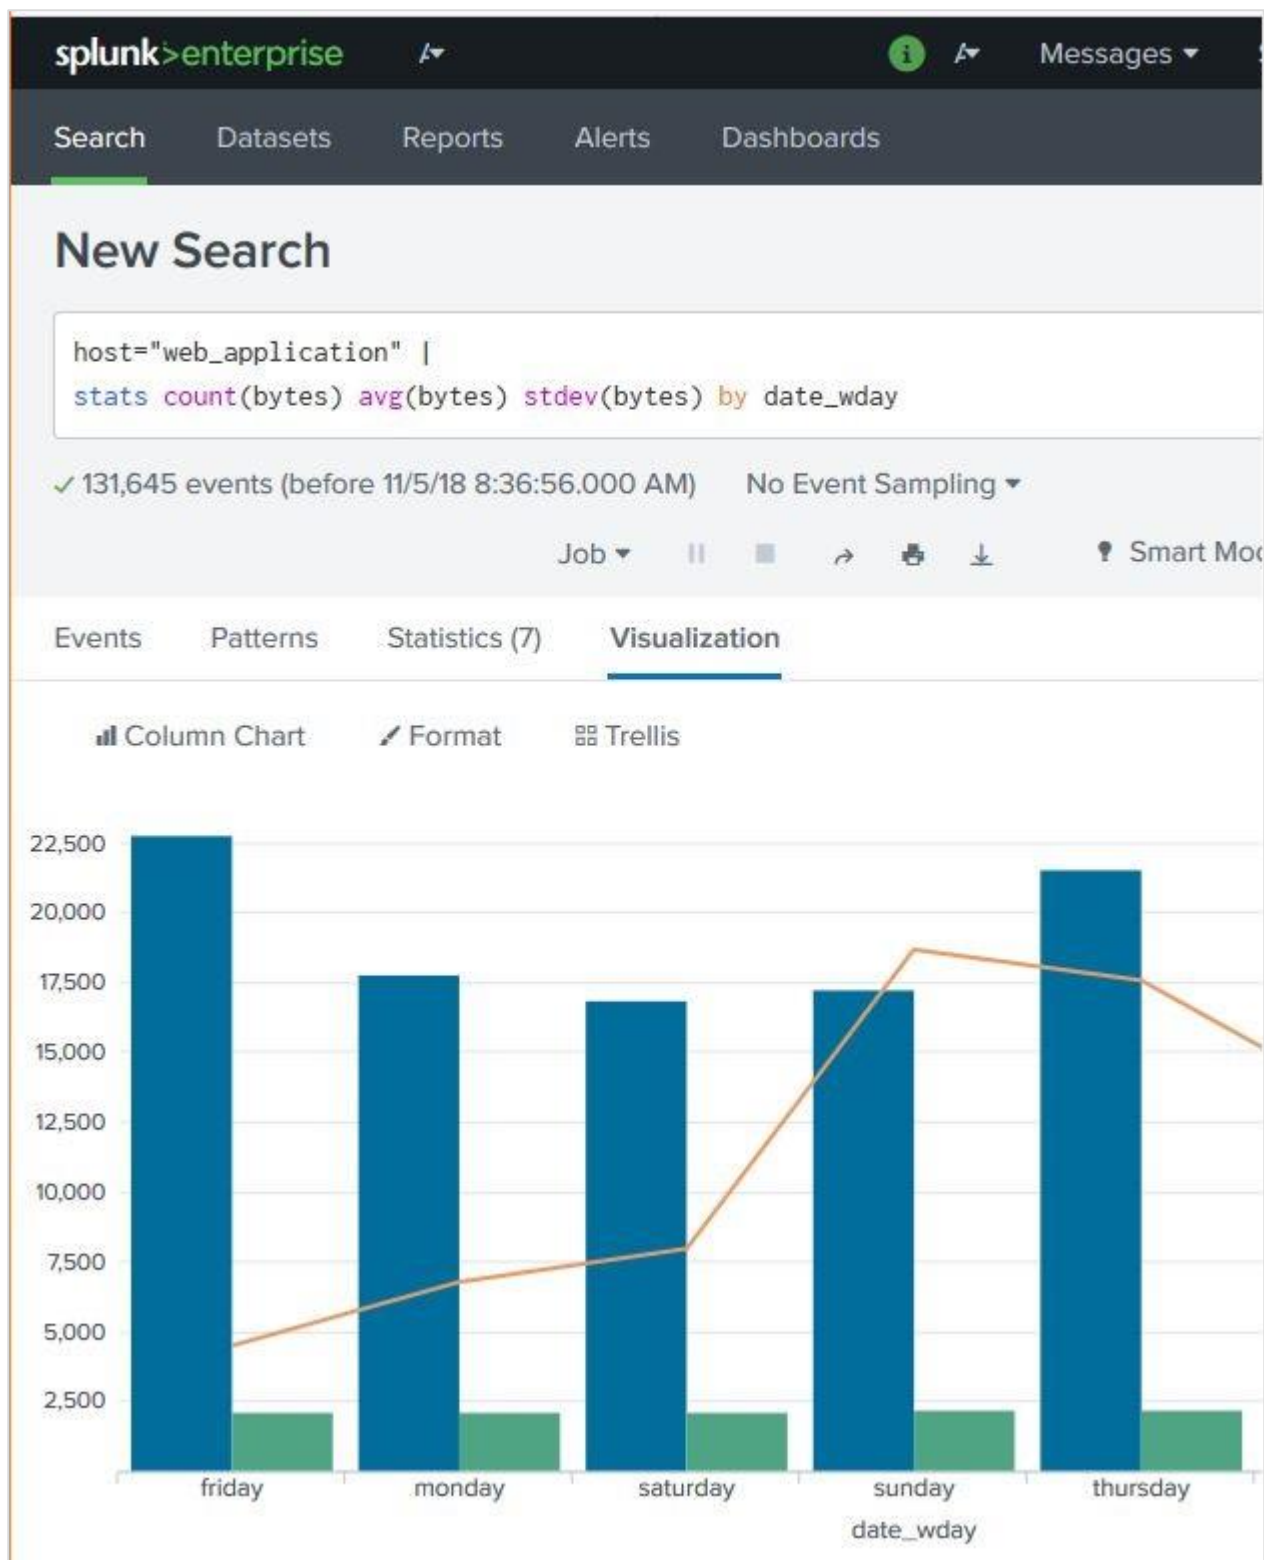


## 24. Splunk – Sparklines

A sparkline is a small representation of some statistical information without showing the axes. It generally appears as a line with bumps just to indicate how certain quantity has changed over a period of time. Splunk has in-built function to create sparklines from the events it searches. It is a part of the chart creation function.

### Selecting the Fields

We need to select the field and the search formula which will be used in creating the sparkline. The below image shows the average byte size values of the some of the files in the web\_application host.

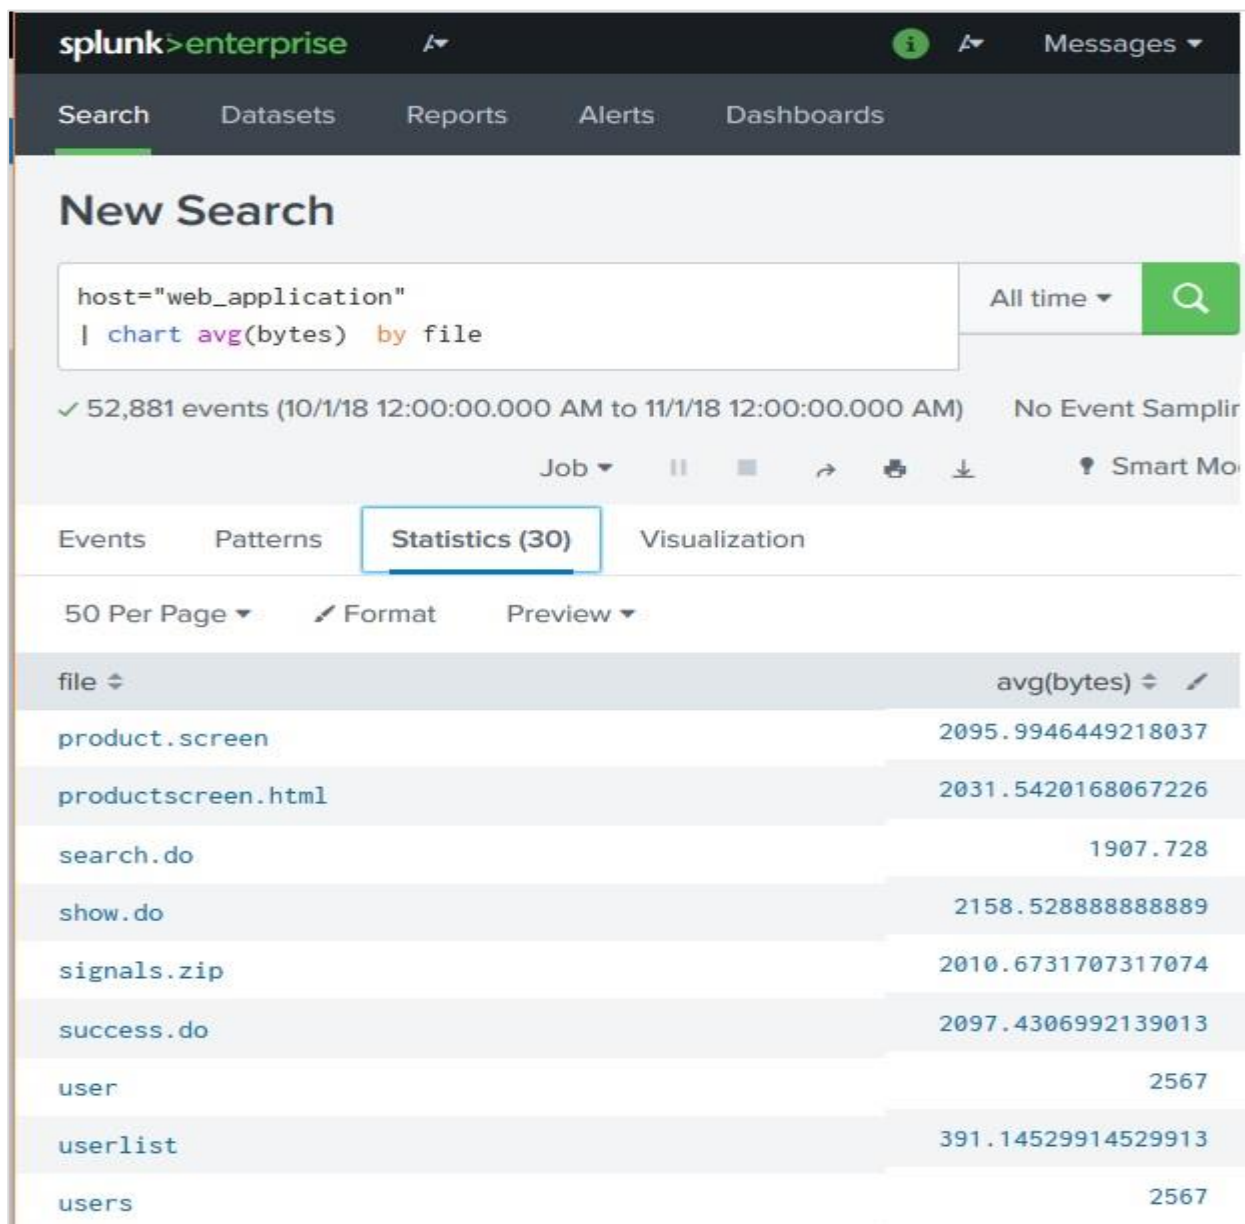

## Creating the Sparkline

To create the Sparklines from above statistics, we add the Sparkline function to the search query as shown in the image below. The table view of the above statistics now starts displaying the sparklines for average byte size of those files. Here, we have taken **All Time** as the time period for calculating the variation in average byte size of files. If we change this time period, then the nature of the graphs will change.

The screenshot shows the Splunk Enterprise interface. The search bar contains the query: `host="web_application" | chart sparkline avg(bytes) by file`. The search results are displayed in a table with columns for file names, sparkline graphs, and average byte sizes. The table is titled 'Statistics (30)' and shows 10 rows of data.

| file               | sparkline | avg(bytes)         |
|--------------------|-----------|--------------------|
| product.screen     |           | 2095.9946449218037 |
| productscreen.html |           | 2031.5420168067226 |
| search.do          |           | 1907.728           |
| show.do            |           | 2158.5288888888889 |
| signals.zip        |           | 2010.6731707317074 |
| success.do         |           | 2097.4306992139013 |
| user               |           | 2567               |
| userlist           |           | 391.14529914529913 |
| users              |           | 2567               |
| usrs               |           | 2567               |

## Changing the Time Period

If we change the time period for the above graph from All Time to Last 30 days, we will see the sparklines to be little different as shown below. Here we need to note, how few file names have vanished from the list as those files were not available in that time period.

**splunk>enterprise** Messages ▾

Search Datasets Reports Alerts Dashboards

### New Search

host="web\_application"  
| chart sparkline avg(bytes) by file

Last 30 days ▾

✓ 131,645 events (before 11/6/18 7:53:48.000 AM) No Event Sampling ▾

Job ▾ || ■ ↻ ⌂ ⬇ ⚙ Smart Mock

Events Patterns **Statistics (30)** Visualization

50 Per Page ▾ / Format Preview ▾

| file               | sparkline | avg(bytes)         |
|--------------------|-----------|--------------------|
| product.screen     |           | 2100.4535608308606 |
| productscreen.html |           | 1748.1111111111111 |
| search.do          |           | 1942.6666666666667 |
| show.do            |           | 2096.5925925925926 |
| signals.zip        |           | 2098.512195121951  |
| success.do         |           | 2090.6297250859106 |
| userlist           |           | 169                |

## 25. Splunk – Managing Indexes

Indexing is a mechanism to speed up the search process by giving numeric addresses to the piece of data being searched. Splunk indexing is similar to the concept of indexing in databases. The installation of Splunk creates three default indexes as follows.


- **main:** This is Splunk's default index where all the processed data is stored.
- **Internal:** This index is where Splunk's internal logs and processing metrics are stored.
- **audit:** This index contains events related to the file system change monitor, auditing, and all user history.

The Splunk Indexers create and maintain the indexes. When you add data to Splunk, the indexer processes it and stores it in a designated index (either, by default, in the main index or in the one that you identify).

### Checking Indexes

---

We can have a look at the existing indexes by going to **Settings -> Indexes** after logging in to Splunk. The below image shows the option.

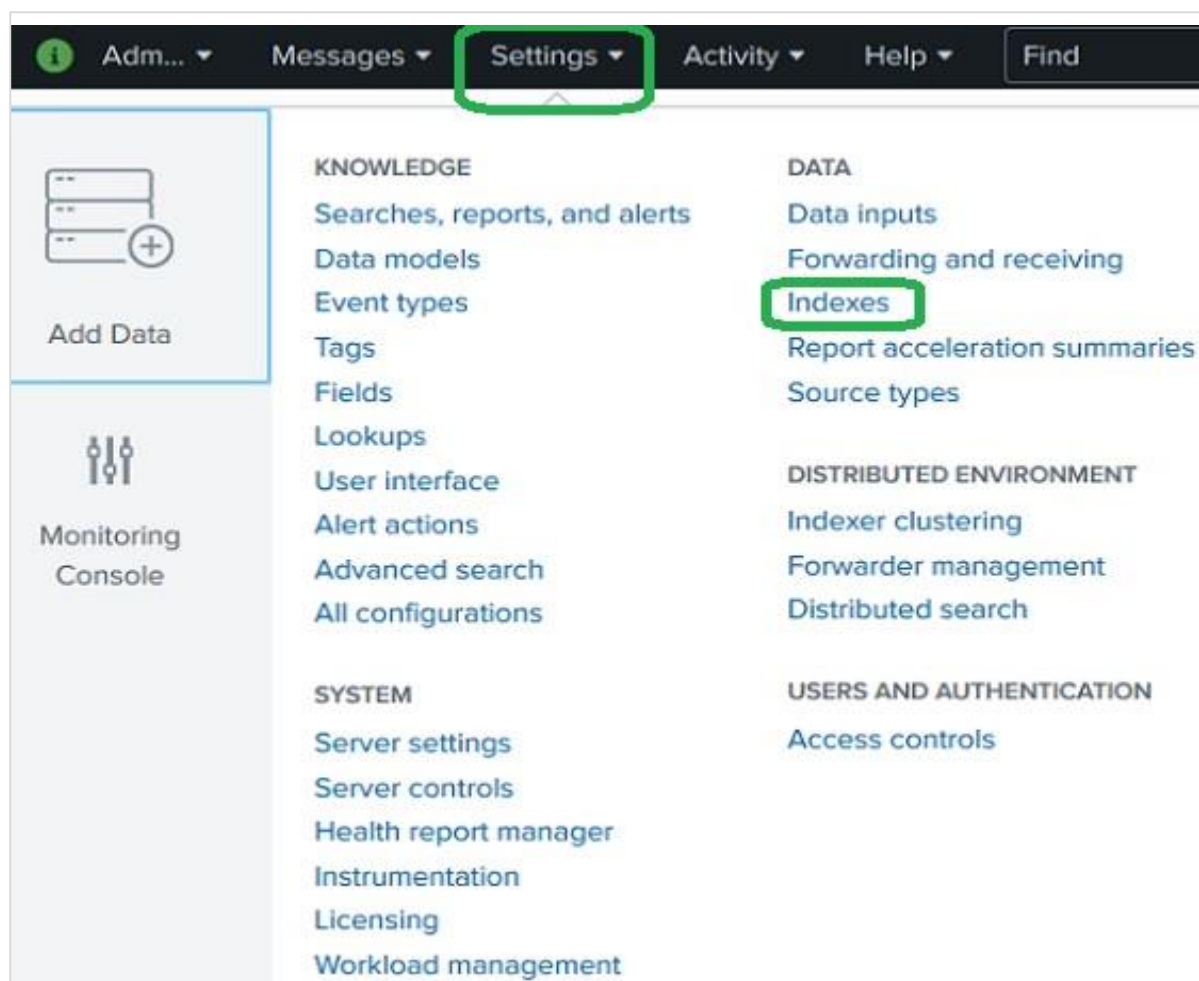

On further clicking on the indexes, we can see the list of indexes Splunk maintains for the data that is already captured in Splunk. The below image shows such a list.

| splunk>enterprise Apps Admin Messages S                                                           |                           |        |        |                |            |
|---------------------------------------------------------------------------------------------------|---------------------------|--------|--------|----------------|------------|
| Indexes                                                                                           |                           |        |        |                |            |
| A repository for data in Splunk Enterprise. Indexes reside in flat files on the Splunk Enterprise |                           |        |        |                |            |
| 9 Indexes filter Q                                                                                |                           |        |        |                |            |
| Name ▲                                                                                            | Actions                   | Type ⇅ | App ⇅  | Current Size ⇅ | Max Size ⇅ |
| _audit                                                                                            | Edit<br>Delete<br>Disable | Events | system | 14 MB          | 488.28 GB  |
| _internal                                                                                         | Edit<br>Delete<br>Disable | Events | system | 227 MB         | 488.28 GB  |
| _introspection                                                                                    | Edit<br>Delete<br>Disable | Events | system | 370 MB         | 488.28 GB  |
| _telemetry                                                                                        | Edit<br>Delete<br>Disable | Events | system | 1 MB           | 488.28 GB  |
| _thefishbucket                                                                                    | Edit<br>Delete<br>Disable | Events | system | 1 MB           | 488.28 GB  |
| history                                                                                           | Edit<br>Delete<br>Disable | Events | system | 1 MB           | 488.28 GB  |
| main                                                                                              | Edit<br>Delete<br>Disable | Events | system | 36 MB          | 488.28 GB  |

## Creating a New Index

We can create a new index with desired size by the data that is stored in Splunk. The additional data that comes in can use this newly created index but better search functionality. The steps to create an index is **Settings -> Indexes -> New Index**. The

below screen appears where we mention the name of the index and memory allocation etc.

## New Index

---

### General Settings

Index Name

Set index name (e.g., INDEX\_NAME). Search using index=INDEX\_NAME.

Index Data Type

Events

Metrics

The type of data to store (event-based or metrics).

Home Path

Hot/warm db path. Leave blank for default (\$SPLUNK\_DB/INDEX\_NAME/db).

Cold Path

Cold db path. Leave blank for default (\$SPLUNK\_DB/INDEX\_NAME/colddb).

Thawed Path

Thawed/resurrected db path. Leave blank for default (\$SPLUNK\_DB/INDEX\_NAME/thaweddb).

Data Integrity Check

Enable

Disable

Enable this if you want Splunk to compute hashes on every slice of your data for the purpose of data integrity.

Size of Entire Index

GB ▾

Maximum target size of entire index.

Max Size of Warm/Cold Bucket

GB ▾

Maximum target size of buckets. Enter 'auto\_high\_volume' for high-volume indexes.

Frozen Path

Cancel

Save

## Indexing the Events

After creating the index above we can configure the events to be indexed by this specific index. We choose the event type. Use the path **Settings -> Data Inputs -> Files & Directories**. Then we choose the specific file of the events which we want to attach to the newly created event. As you can see in the below image, we have assigned the index named **index\_web\_app** to this specific file.

**splunk**>enterprise Apps ▾  Administrator ▾ Messages ▾ Settings ▾

**\$SPLUNK\_HOME\var\log\splunk**  
Data inputs » Files & directories » \$SPLUNK\_HOME\var\log\splunk

You can tell Splunk to continuously collect data from a file or directory (keep indexing data as it comes in), or index a static file and then stop.

### Host

Tell Splunk how to set the value of the host field in your events from this source.

Set host

Specify method for getting host field for events coming from this source.

Host field value

### Source type

Set the source type

### Index

Set the destination index for this source.

Index

### Advanced options

Whitelist

Specify a regex that files from this source must match to be monitored by Splunk.

Blacklist

Specify a regex that files from this source must NOT match to be monitored by Splunk

## 26. Splunk – Calculated Fields

Many times, we will need to make some calculations on the fields that are already available in the Splunk events. We also want to store the result of these calculations as a new field to be referred later by various searches. This is made possible by using the concept of calculated fields in Splunk search.

A simplest example is to show the first three characters of a week day instead of the complete day name. We need to apply certain Splunk function to achieve this manipulation of the field and store the new result under a new field name.


### Example

---

The Web\_application log file has two fields named bytes and date\_wday. The value in the bytes field is the number of bytes. We want to display this value as GB. This will require the field to be divided by 1024 to get the GB value. We need to apply this calculation to the bytes field.

Similarly, the date\_wday displays complete name of the week day. But we need to display only the first three characters.

The existing values in these two fields is shown in the image below:

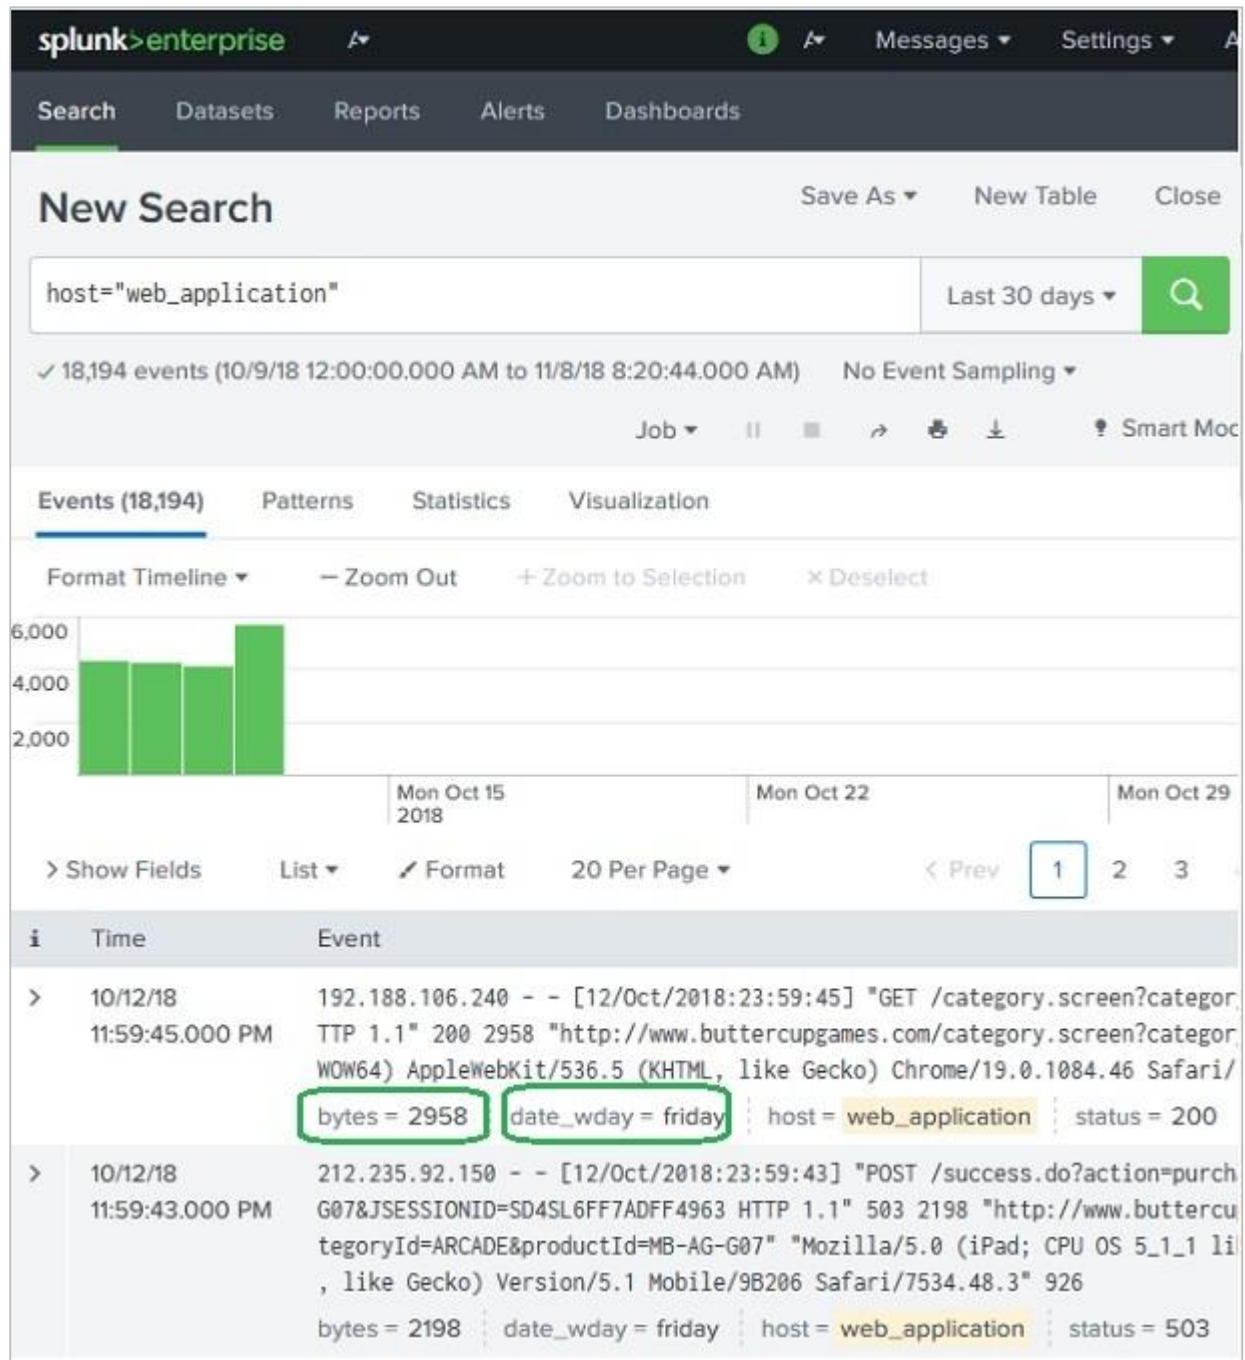

## Using the eval Function


To create calculated field, we use the eval function. This function stores the result of the calculation in a new field. We are going to apply the below two calculations:

```
# divide the bytes with 1024 and store it as a field named byte_in_GB
Eval byte_in_GB = (bytes/1024)
```

```
# Extract the first 3 characters of the name of the day.
Eval short_day=substr(date_wday,1,3)
```

## Adding New Fields

We add new fields created above to the list of fields we display as part of the search result. To do this, we choose **All fields** options and tick check mark against the name of these new fields as shown in below image:

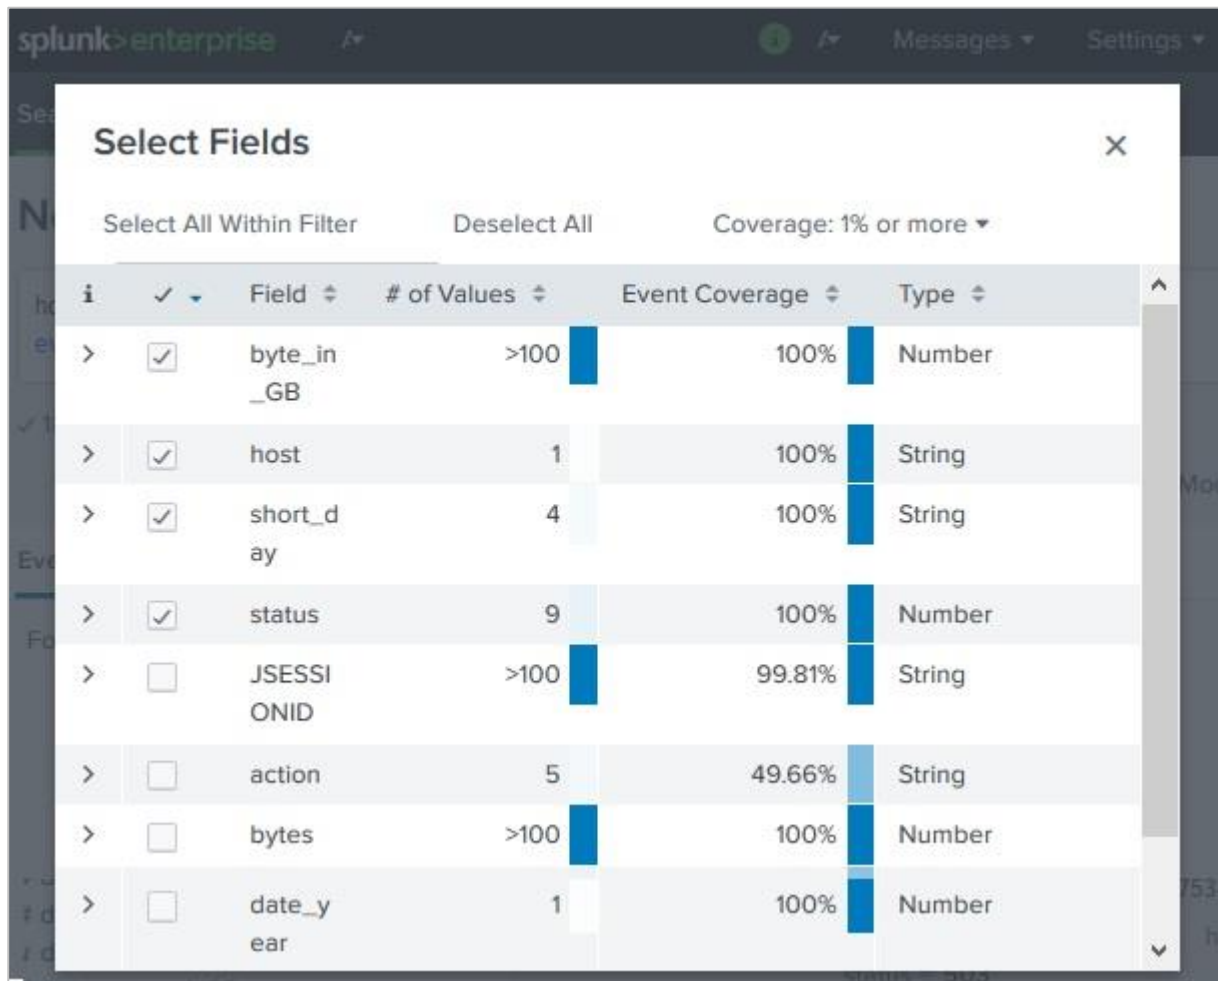

## Displaying the calculated Fields

After choosing the fields above, we are able to see the calculated fields in the search result as shown below. The search query displays the calculated fields as shown below:

splunk>enterprise Messages Settings

Search Datasets Reports Alerts Dashboards

## New Search Save As New Table Close

host="web\_application" | eval byte\_in\_GB = (bytes/1024) |  
eval short\_day=substr(date\_wday,1,3) Last 30 days Q

✓ 18,194 events (10/9/18 12:00:00.000 AM to 11/8/18 8:09:43.000 AM) No Event Sampling

Job || → ↓ Smart Mode

Events (18,194) Patterns Statistics Visualization

Format Timeline − Zoom Out + Zoom to Selection × Deselect



Mon Oct 15 2018 Mon Oct 22 Mon Oct 29


> Show Fields List Format 20 Per Page < Prev 1 2 3

| Time                        | Event                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10/12/18<br>11:59:45.000 PM | 192.188.106.240 - - [12/Oct/2018:23:59:45] "GET /category.screen?category=1" 200 2958 "http://www.buttercupgames.com/category.screen?category=WOW64) AppleWebKit/536.5 (KHTML, like Gecko) Chrome/19.0.1084.46 Safari/536.5" 197<br>byte_in_GB = 2.888671875   host = web_application   short_day = fri   sta                                                                           |
| 10/12/18<br>11:59:43.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:43] "POST /success.do?action=purchase&productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963 HTTP 1.1" 503 2198 "http://www.buttercupgames.com/product.do?productId=MB-AG-G07" "Mozilla/5.0 (iPad; CPU OS 5_1_1 like Gecko) Version/5.1 Mobile/9B206 Safari/7534.48.3" 926<br>byte_in_GB = 2.146484375   host = web_application   short_day = fri   sta |
| 10/12/18<br>11:59:41.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:41] "POST /cart.do?action=addtocart&productId=MB-AG-G07 HTTP 1.1" 200 669 "http://www.buttercupgames.com/product.do?productId=MB-AG-G07" (iPad; CPU OS 5_1_1 like Mac OS X) AppleWebKit/534.46 (KHTML, like Gecko) Version/5.1 Mobile/9B206 Safari/7534.48.3" 197<br>byte_in_GB = 0.6533203125   host = web_application   short_day = fri   s     |

## 27. Splunk – Tags

Tags are used to assign names to specific field and value combinations. These fields can be event type, host, source, or source type, etc. You can also use a tag to group a set of field values together, so that you can search for them with one command. For example, you can tag all the different files generated on Monday to a tag named `mon_files`.

To find the field-value pair which we are going to tag, we need to expand the events and locate the field to be considered. The below image shows how we can expand an event to see the fields:

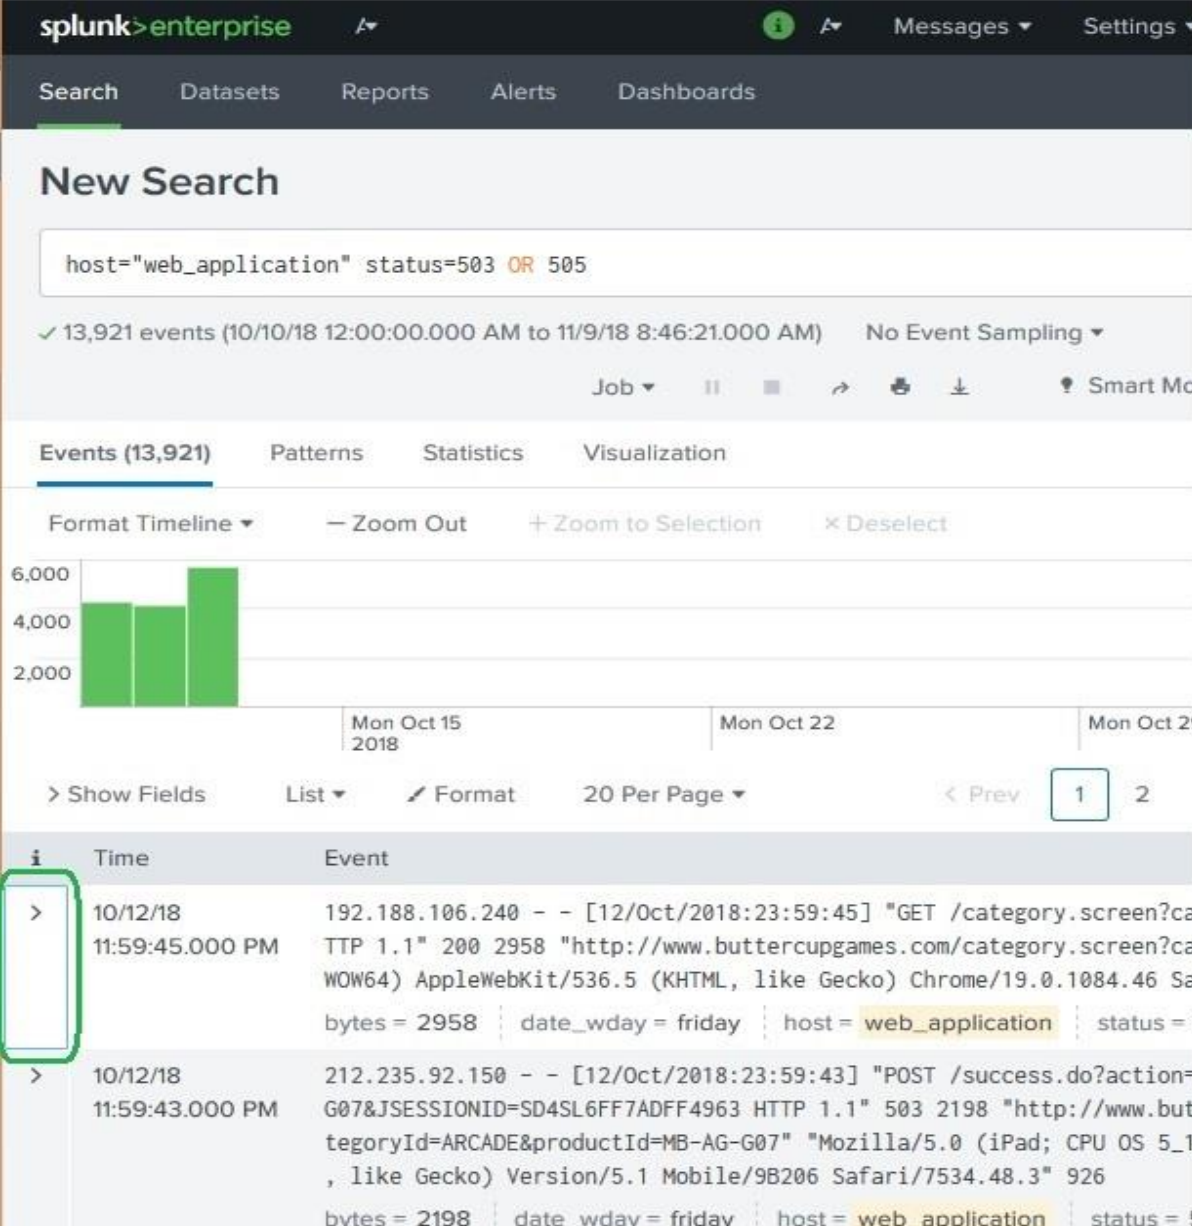

The screenshot shows the Splunk Enterprise interface. At the top, there's a navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. Below this, a 'New Search' section contains the search query: `host="web_application" status=503 OR 505`. The search results show 13,921 events from 10/10/18 12:00:00.000 AM to 11/9/18 8:46:21.000 AM. A bar chart visualization is shown above the event list. The event list has columns for 'Time' and 'Event'. The first event is expanded, showing its fields: `bytes = 2958`, `date_wday = friday`, `host = web_application`, and `status = 503`. The second event is also expanded, showing its fields: `bytes = 2198`, `date_wday = friday`, `host = web_application`, and `status = 503`.

| Time                     | Event                                                                                                                                                                                                                                                                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10/12/18 11:59:45.000 PM | 192.188.106.240 - - [12/Oct/2018:23:59:45] "GET /category.screen?category=200 2958 "http://www.buttercupgames.com/category.screen?category=WOW64) AppleWebKit/536.5 (KHTML, like Gecko) Chrome/19.0.1084.46 Safari/536.5" 2958   date_wday = friday   host = web_application   status = 503                                                         |
| 10/12/18 11:59:43.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:43] "POST /success.do?action=G07&JSESSIONID=SD4SL6FF7ADFF4963 HTTP 1.1" 503 2198 "http://www.buttercupgames.com/categoryId=ARCADE&productId=MB-AG-G07" "Mozilla/5.0 (iPad; CPU OS 5_1 like Gecko) Version/5.1 Mobile/9B206 Safari/7534.48.3" 926   date_wday = friday   host = web_application   status = 503 |

## Creating Tags

We can create tags by adding the tag value to field-value pair using **Edit Tags** option as shown below. We choose the field under the Actions column.


The screenshot shows the Splunk Enterprise interface. At the top, the search bar contains the query: `host="web_application" status=503 OR 505`. Below the search bar, it indicates 13,921 events were found for the time range from 10/10/18 12:00:00.000 AM to 11/9/18 8:46:21.000 AM. The 'Events (13,921)' tab is selected, showing a bar chart and a table of events. The 'Event Actions' dropdown is open, displaying a table with the following data:

| Type     | Field     | Value           | Actions |
|----------|-----------|-----------------|---------|
| Selected | bytes     | 2958            | ▼       |
|          | date_wday | friday          | ▼       |
|          | host      | web_application | ▼       |
|          | status    | 503             | ▼       |

The 'Edit Tags' button is visible next to the 'status' field. A green box highlights the dropdown arrow in the 'Actions' column for the 'status' field.

The next screen prompts us to define the tag. For the Status field, we choose the status value of 503 or 505 and assign a tag named `server_error` as shown below. We have to do

it one by one by choosing two events, each with the events with status value 503 and 505. The image below shows the method for status value as 503. We have to repeat the same steps for an event with status value as 505.

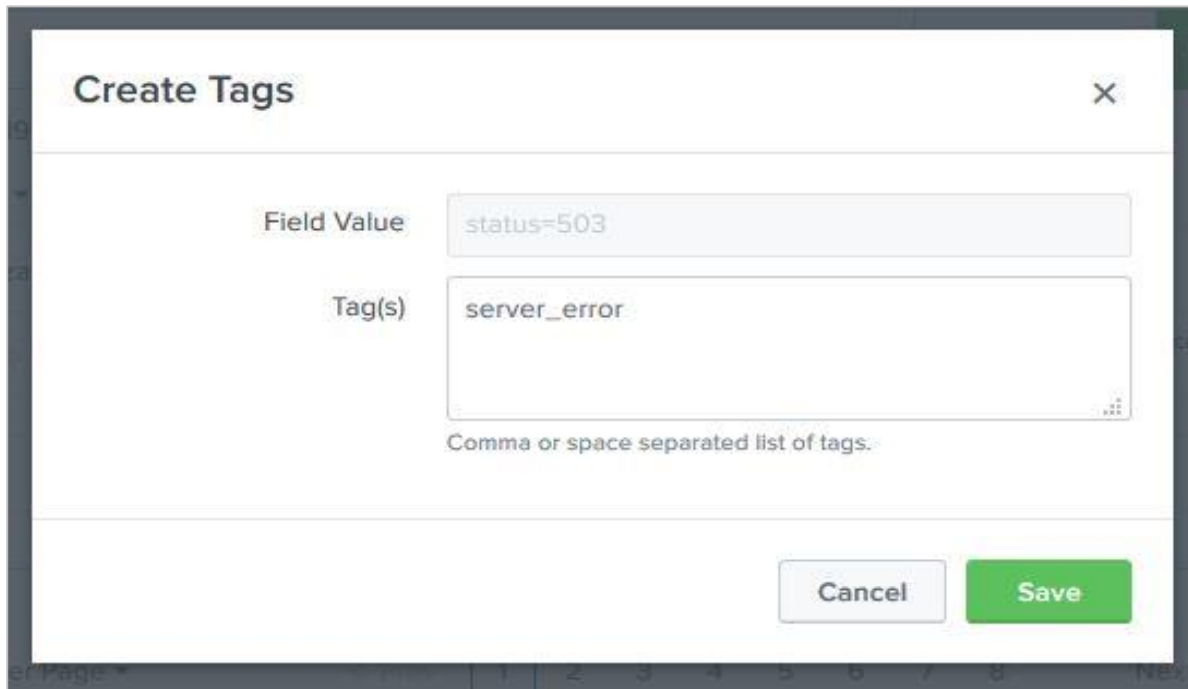

**Create Tags** [X]

Field Value: status=503

Tag(s): server\_error

Comma or space separated list of tags.

Cancel Save

## Search Using Tags

Once the tags are created, we can search for events containing the Tag by simply writing the Tag name in the search bar. In the below image, we see all the events which have status: 503 or 505.

splunk>enterprise

Search Datasets Reports Alerts Dashboards

## New Search

Save As New Table Close

tag::status="server\_error" Last 30 days

✓ 417 events (10/10/18 12:00:00.000 AM to 11/9/18 10:13:01.000 AM) No Event Sampling

Job

Events (417) Patterns Statistics Visualization

Format Timeline Zoom Out Zoom to Selection Deselect



Mon Oct 15 2018 Mon Oct 22 Mon Oct 29

Show Fields List Format 20 Per Page Prev 1 2

| i | Time                        | Event                                                                                                                                                                                                                                                                                                                                                     |
|---|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/12/18<br>11:59:43.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:43] "POST /success.do?action=G07&JSESSIONID=SD4SL6FF7ADFF4963 HTTP 1.1" 503 2198 "http://www.buttercupgames.com/category.screen?productId=ARCADE&productId=MB-AG-G07" "Mozilla/5.0 (iPad; CPU OS 5_1 like Gecko) Version/5.1 Mobile/9B206 Safari/7534.48.3" 926<br>host = web_application status = 503 server_error |
| > | 10/12/18<br>11:48:44.000 PM | 27.102.11.11 - - [12/Oct/2018:23:48:44] "GET /product.screen?productId=7 HTTP 1.1" 503 1068 "http://www.buttercupgames.com/category.screen?productId=7" "MSIE 7.0; Windows NT 5.1; Trident/4.0; .NET CLR 2.0.50727; MS-RTC L" 1068<br>host = web_application status = 503 server_error                                                                    |
| > | 10/12/18<br>11:16:54.000 PM | 95.130.170.231 - - [12/Oct/2018:23:16:54] "GET /category.screen?categoryId=ARCADE HTTP 1.1" 505 3831 "http://www.buttercupgames.com/oldlink" "Mozilla/5.0 (Windows NT 6.0; Trident/4.0; .NET CLR 2.0.50727; MS-RTC LM 8; InfoPath.2)" 607<br>host = web_application status = 505 server_error                                                             |


## 28. Splunk – Apps

A Splunk app is an extension of Splunk functionality which has its own in-built UI context to serve a specific need. Splunk apps are made up of different Splunk knowledge objects (lookups, tags, eventtypes, savedsearches, etc). Apps themselves can utilize or leverage other apps or add-ons. Splunk can run any number of apps simultaneously.

When you log in to Splunk, you land on an app which is typically, the **Splunk Search app**. So, almost everytime you are inside the Splunk interface, you are using an app.

### Listing Splunk Apps

We can list the available apps in Splunk by using the option **Apps -> Manage Apps**. Navigating this option brings out the following screen which lists the existing apps available in Splunk interface.

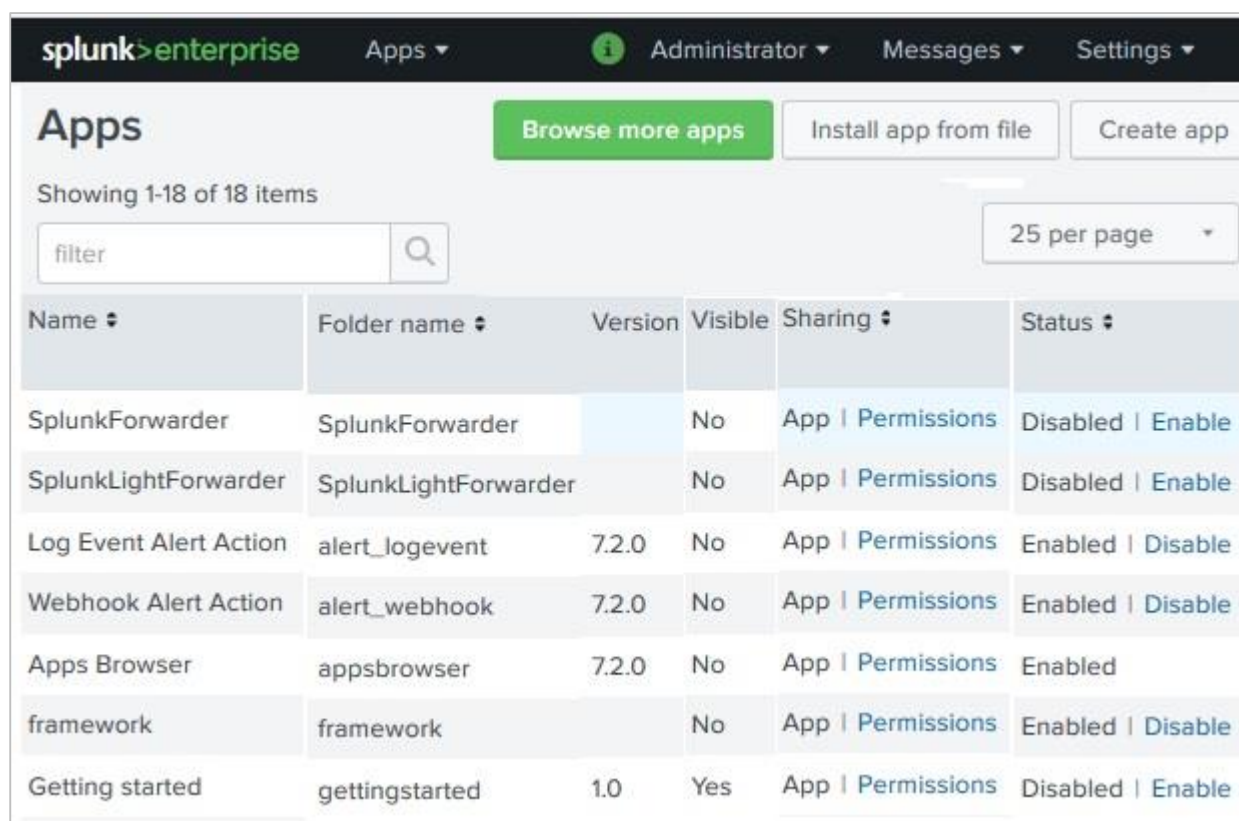

| Name                   | Folder name          | Version | Visible | Sharing           | Status            |
|------------------------|----------------------|---------|---------|-------------------|-------------------|
| SplunkForwarder        | SplunkForwarder      |         | No      | App   Permissions | Disabled   Enable |
| SplunkLightForwarder   | SplunkLightForwarder |         | No      | App   Permissions | Disabled   Enable |
| Log Event Alert Action | alert_logevent       | 7.2.0   | No      | App   Permissions | Enabled   Disable |
| Webhook Alert Action   | alert_webhook        | 7.2.0   | No      | App   Permissions | Enabled   Disable |
| Apps Browser           | appsbrowser          | 7.2.0   | No      | App   Permissions | Enabled           |
| framework              | framework            |         | No      | App   Permissions | Enabled   Disable |
| Getting started        | gettingstarted       | 1.0     | Yes     | App   Permissions | Disabled   Enable |

Following are important values associated with the Splunk apps:

- **Name:** It is the name of the App and unique for each App.
- **Folder Name:** It is the name to use for the directory in \$SPLUNK\_HOME/etc/apps/. The name of the folder cannot contain "dot" (.) character.
- **Version:** It is the app version string. Visible Indicates whether the app should be visible in Splunk Web. Apps that contain a user interface should be visible.

- **Sharing:** It is the level of permissions (read or write) given to different Splunk users for that specific app.
- **Status:** It is the current status of availability of the App. It may be enabled or disabled for use.

## App Permissions

A proper setting of permissions for using the app is important. We can restrict the app to be used by a single user or by multiple users including all users. The below screen which appears after clicking on the permissions link in the above is used to modify the access to different roles.

The screenshot shows the 'Permissions' page for the 'alert\_logevent' app in the Splunk Enterprise interface. The page title is 'Permissions' with a breadcrumb trail 'Apps > alert\_logevent > Permissions'. Below the title, there is a section 'App permissions' with a descriptive text: 'Users with read access can only save objects for themselves, and require write access to be able to share objects with other users.' This is followed by a table with columns 'Roles', 'Read', and 'Write'. The table lists several roles: 'Everyone' (both Read and Write checked), 'admin', 'can\_delete', 'power', 'splunk-system-role', and 'user' (all Read and Write unchecked). Below the table is a section 'Sharing for config file-only objects' with a descriptive text: 'Set permissions for configurations that have been copied over or added to config files rather than created through the UI. Objects defined in config files only (not in the UI) should appear in'. At the bottom of this section are two radio buttons: 'This app only (system)' (selected) and 'All apps'. At the very bottom of the page are 'Cancel' and 'Save' buttons.

| Roles              | Read                                | Write                               |
|--------------------|-------------------------------------|-------------------------------------|
| Everyone           | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| admin              | <input type="checkbox"/>            | <input type="checkbox"/>            |
| can_delete         | <input type="checkbox"/>            | <input type="checkbox"/>            |
| power              | <input type="checkbox"/>            | <input type="checkbox"/>            |
| splunk-system-role | <input type="checkbox"/>            | <input type="checkbox"/>            |
| user               | <input type="checkbox"/>            | <input type="checkbox"/>            |

**Sharing for config file-only objects**

Set permissions for configurations that have been copied over or added to config files rather than created through the UI. Objects defined in config files only (not in the UI) should appear in

☒ This app only (system) ☐ All apps

Cancel Save

By default, the check marks for Read and Write option is available for Everyone. But we can change that by going to each role and selecting appropriate permission for that specific role.

## App Marketplace

There is a wide variety of needs for which the Splunk search functionalities are used. So, there is a Splunk App market place which has come into existence showing many different apps created by individual and organizations. They are available in both free and paid versions. We can browse those apps by choosing the option **Apps -> Manage Apps -> Browse More Apps**. The below screen comes up.

The screenshot displays the 'Browse More Apps' interface in the Splunk Enterprise console. The top navigation bar includes the 'splunk>enterprise' logo, a search icon, and links for 'Messages' and 'Settings'. The main heading is 'Browse More Apps'. Below this, there is a search bar labeled 'Find apps by keyword, technology'. To the left, there are filter sections for 'CATEGORY', 'CIM VERSION', 'SUPPORT TYPE', and 'APP CONTENT', each with a list of checkboxes. The main content area shows a list of apps, currently displaying 'Website Monitoring' and 'NLP Text Analytics'. Each app card includes a title, a description, a category, author information, and an 'Install' button. The 'Website Monitoring' app is described as a modular input for detecting downtime and performance problems. The 'NLP Text Analytics' app is described as a simple interface for analyzing text in Splunk using Python.

As you can see, the App name along with a brief description of the functionality of the App appears. This helps you decide which app to use. Also, note how the Apps are categorized in the left bar to help choose the type of App faster.

## 29. Splunk – Removing Data

Removing data from Splunk is possible by using the **delete** command. We first create the search condition to fetch the events we want to mark for delete. Once the search condition is acceptable, we add the delete clause at the end of the command to remove those events from Splunk. After deletion, not even a user with admin privilege is able to view this data in Splunk.

Removal of data is irreversible. If you still want the removed data back into Splunk then you should have the original source data copy with you which can be used to re-index the data in Splunk. It will be a process similar to creating a new index.

### Assigning Delete Privilege

---

Any user including admin user does not have access to delete the data by default. By default, only the "**can\_delete**" role has the ability to delete events. So, we create a new user, assign this role and then login with the credentials of this new user to perform the delete operation. The below image shows how we create a new user with "can\_delete" role. We arrive at this screen by following the path **Settings -> Access Controls -> Users -> New User**.

Create User

Name

del\_usr

Full name

optional

Email address

optional

Set password

••••••••

Confirm password

••••••••

Password must contain at least ?

✓ 8 characters

Time zone ?

-- Default System Timezone --

Default app ?

launcher (Home)

Assign to roles ?

Available item(s)

admin

can\_delete

power

splunk-system-role

user

add all

Selected item(s)

can\_delete

user

remove all

Create a role for this user

☐

Require password change on first login

☒

Cancel

Save

We then log out of Splunk interface and login back with this newly created user.

## Identifying the data to be removed

First, we need to identify the list of events we want to remove. It is done using a normal search query specifying the filter condition. In the below example, we choose to look for the events from the host web\_application which has the field http status value as **505**. Our goal is to delete only the set of data containing these values to be removed from the search result. The below image shows this set of data selected.

**New Search** Save As ▾ New Table Close

host="web\_application" status = 505 All time ▾ Q

✓ 1,352 events (before 11/20/18 8:58:41.000 PM) No Event Sampling ▾

Job ▾ || ↶ ↷ ⬇ ⬆ Smart Mod

**Events (1,352)** Patterns Statistics Visualization

Format Timeline ▾ — Zoom Out + Zoom to Selection × Deselect

> Show Fields List ▾ Format 20 Per Page ▾ < Prev 1 2 3 4 5 6

| i | Time                        | Event                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/12/18<br>12:43:28.000 AM | 216.221.226.11 - - [12/Oct/2018:00:43:28] "GET /oldlink?&JSESSIONID=SD3SL7FF1ADFF4951 /www.buttercupgames.com/category.screen?categoryId=NULL" "Mozilla/4.0 (compatible; MS 147<br>bytes = 862   file = oldlink   host = web_application   status = 505 server_error  <br>url = /oldlink?&JSESSIONID=SD3SL7FF1ADFF4951                                                                                                                                         |
| > | 10/12/18<br>12:31:26.000 AM | 87.240.128.18 - - [12/Oct/2018:00:31:26] "GET /category.screen?categoryId=NULL&JSESSIONID=SD6SL10FF4ADFF4960 HTTP 1.1" 505 1899 "http://www.buttercupgames.com/oldlink" "Mozilla/5.0 (Windows; U; Wi 1.9.2.28) Gecko/20120306 YFF3 Firefox/3.6.28 ( .NET CLR 3.5.30729; .NET4.0C)" 871<br>bytes = 1899   file = category.screen   host = web_application   status = 505 server_error  <br>url = /category.screen?categoryId=NULL&JSESSIONID=SD6SL10FF4ADFF4960 |
| > | 10/11/18<br>11:58:17.000 PM | 188.138.40.166 - - [11/Oct/2018:23:58:17] "GET /product.screen?productId=SF-BVS-01&JSESSIONID=SD2SL6FF5ADFF4957 HTTP 1.1" 505 2071 "http://www.buttercupgames.com/product.screen?productId=SF-BVS-01 le; MSIE 6.0; Windows NT 5.1; SV1; .NET CLR 1.1.4322)" 531<br>bytes = 2071   file = product.screen   host = web_application   productId = SF-BVS-01   sta<br>url = /product.screen?productId=SF-BVS-01&JSESSIONID=SD2SL6FF5ADFF4957                       |

## Deleting the Selected Data

Next, we use the delete command to remove the above selected data from the result set. It involves just adding the word delete after '|' at the end of the search query as shown below:

**splunk>enterprise** Messages Settings Activity

Search Datasets Reports Alerts Dashboards

## New Search

Save As New Table Close

host="web\_application" status = 505 | delete All time

✓ 1,352 events (before 11/20/18 8:58:41.000 PM) No Event Sampling

Job

Events (1,352) Patterns Statistics Visualization

Format Timeline Zoom Out Zoom to Selection Deselect

70 50 30

Sat Sep 15 2018 Sat Sep 22 Sat Sep 29 Sat Oct

> Show Fields List Format 20 Per Page < Prev 1 2 3 4 5 6

| i | Time                        | Event                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/12/18<br>12:43:28.000 AM | 216.221.226.11 - - [12/Oct/2018:00:43:28] "GET /oldlink?&JSESSIONID=SD3SL7FF1ADFF4951 /www.buttercupgames.com/category.screen?categoryId=NULL" "Mozilla/4.0 (compatible; I 147<br>bytes = 862   file = oldlink   host = web_application   status = 505 server_error  <br>uri = /oldlink?&JSESSIONID=SD3SL7FF1ADFF4951                                                                                                            |
| > | 10/12/18<br>12:31:26.000 AM | 87.240.128.18 - - [12/Oct/2018:00:31:26] "GET /category.screen?categoryId=NULL&JSESS TTP 1.1" 505 1899 "http://www.buttercupgames.com/oldlink" "Mozilla/5.0 (Windows; U; 1.9.2.28) Gecko/20120306 YFF3 Firefox/3.6.28 ( .NET CLR 3.5.30729; .NET4.0C)" 871<br>bytes = 1899   file = category.screen   host = web_application   status = 505 server_error<br>uri = /category.screen?categoryId=NULL&JSESSIONID=SD6SL10FF4ADFF4960 |
| > | 10/11/18<br>11:58:17.000 PM | 188.138.40.166 - - [11/Oct/2018:23:58:17] "GET /product.screen?productId=SF-BVS-01&J 7 HTTP 1.1" 505 2071 "http://www.buttercupgames.com/product.screen?productId=SF-BVS-01&J le; MSIE 6.0; Windows NT 5.1; SV1; .NET CLR 1.1.4322)" 531<br>bytes = 2071   file = product.screen   host = web_application   productId = SF-BVS-01   s<br>uri = /product.screen?productId=SF-BVS-01&JSESSIONID=SD2SL6FF5ADFF4957                  |

After running the search query above, we can see the next screen where those events have got deleted.

The screenshot shows the Splunk Enterprise web interface. At the top, there's a navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. Below this, the 'New Search' page is active. The search bar contains the query: `host="web_application" status = 505 | delete`. To the right of the search bar, there's a 'Save As' dropdown, a 'New Table' button, and a 'Close' button. Below the search bar, it indicates '1,352 events (before 11/21/18 6:12:31.000 AM)' and 'No Event Sampling'. A toolbar with icons for 'Job', 'Pause', 'Refresh', 'Download', and 'Smart Monitor' is visible. Below the toolbar, there are tabs for 'Events', 'Patterns', 'Statistics (2)', and 'Visualization'. The 'Statistics (2)' tab is selected. Under this tab, there are options for '20 Per Page', 'Format', and 'Preview'. A table is displayed with the following columns: 'splunk\_server', 'index', 'deleted', and 'errors'. The 'deleted' column is highlighted with a green box. The table has two rows of data:


| splunk_server   | index   | deleted | errors |
|-----------------|---------|---------|--------|
| DESKTOP-JKQCPLP | __ALL__ | 1352    | 0      |
| DESKTOP-JKQCPLP | main    | 1352    | 0      |

You can also further run the search query to verify that these events are not returned in the result set.

## 30. Splunk – Custom Chart


The charts created in Splunk has many features to customize them as per the user need. These customizations help in displaying the data completely or changing the interval for which the data is calculated. After initially creating the chart, we dive into the customization features.

Let us consider the below search query for getting the statistics of various measurements of byte size of the files by week day. We choose a column chart to display the graph and see the default values in the X-axis and Y-Axis values.

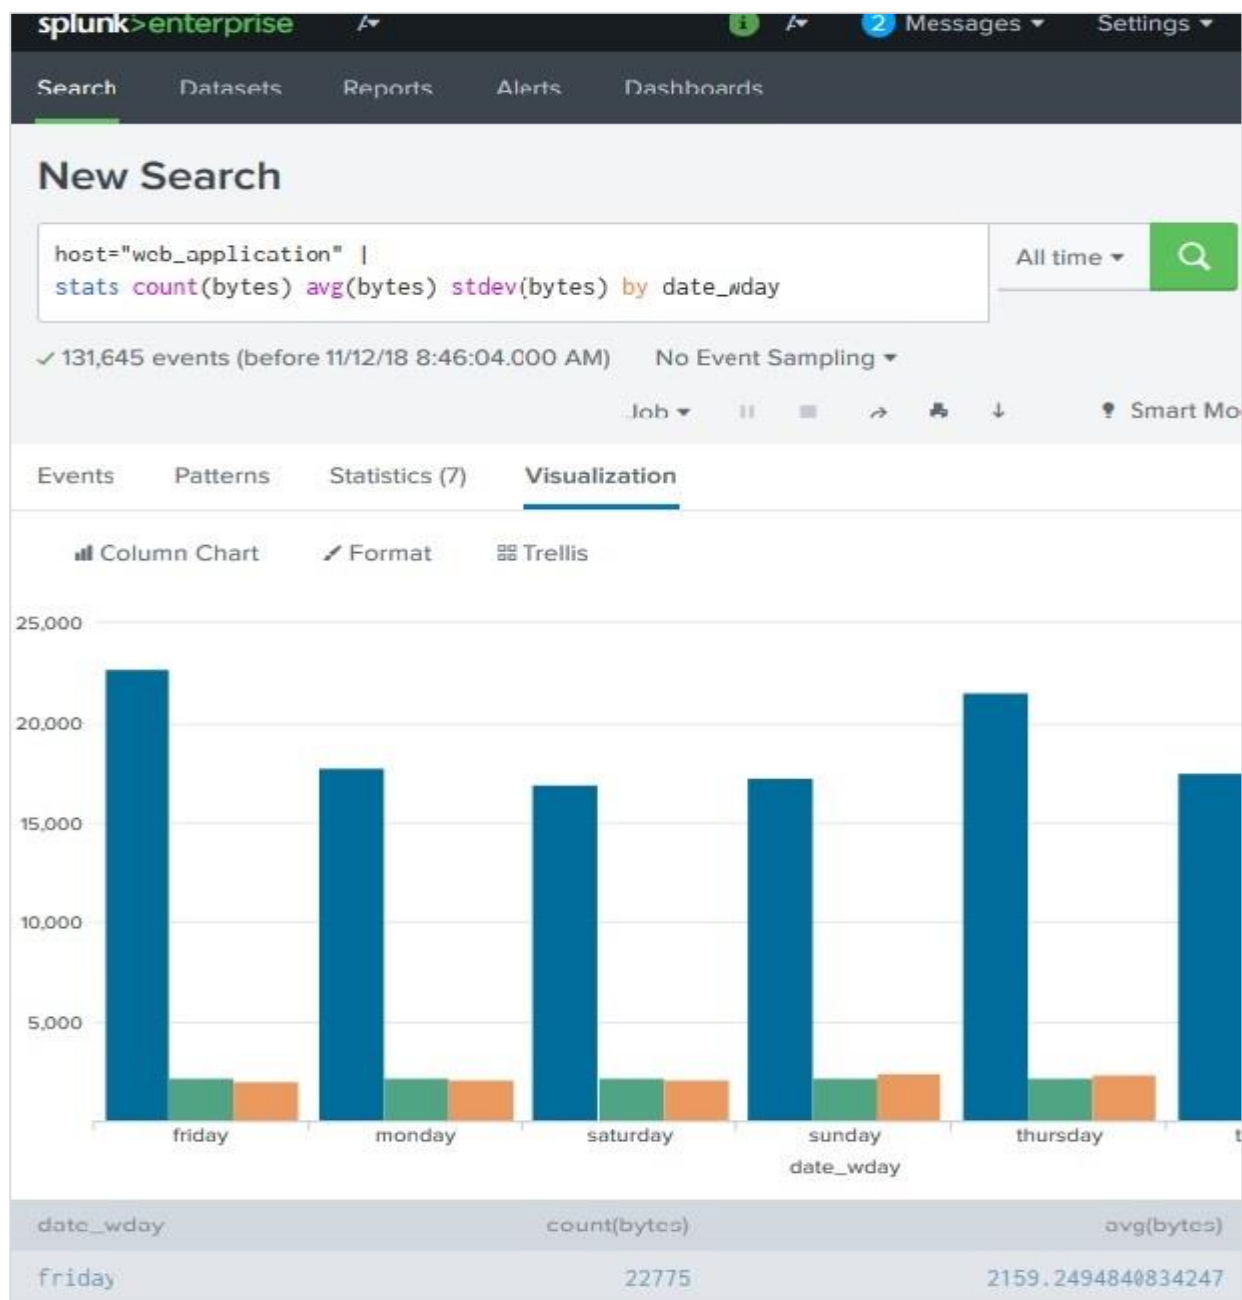


## Axis Customization

We can customize the axes displayed in the chart by choosing the **Format -> X-axis** button. Here, we edit the Title of the chart. We also edit the Label Rotation option to choose an inclined label to fit better into the chart. After editing these, results can be seen in the chart as highlighted using the green boxes below.

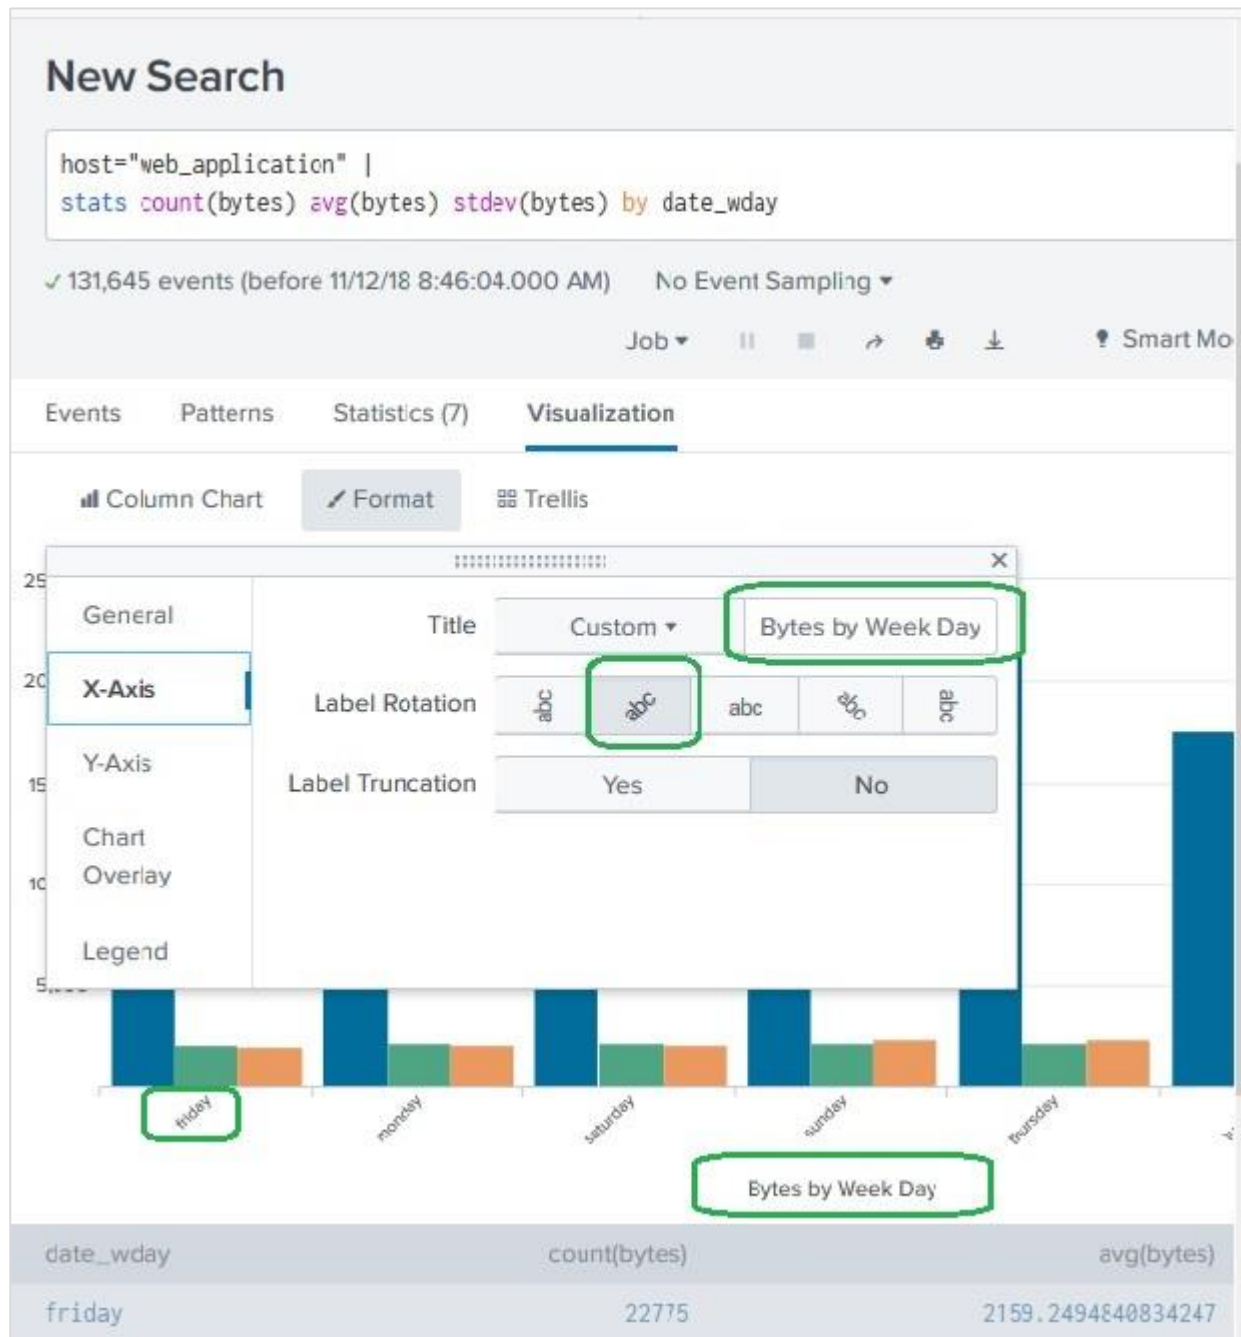

## Legend Customization

The legends of the chart can also be customized by using the option **Format -> Legend**. We edit the option Legend Position to mark it at Top. We also edit the Legend Truncation option to Truncate the End of the legend if required. The below cart shows the legends displayed at the top with colors and values.

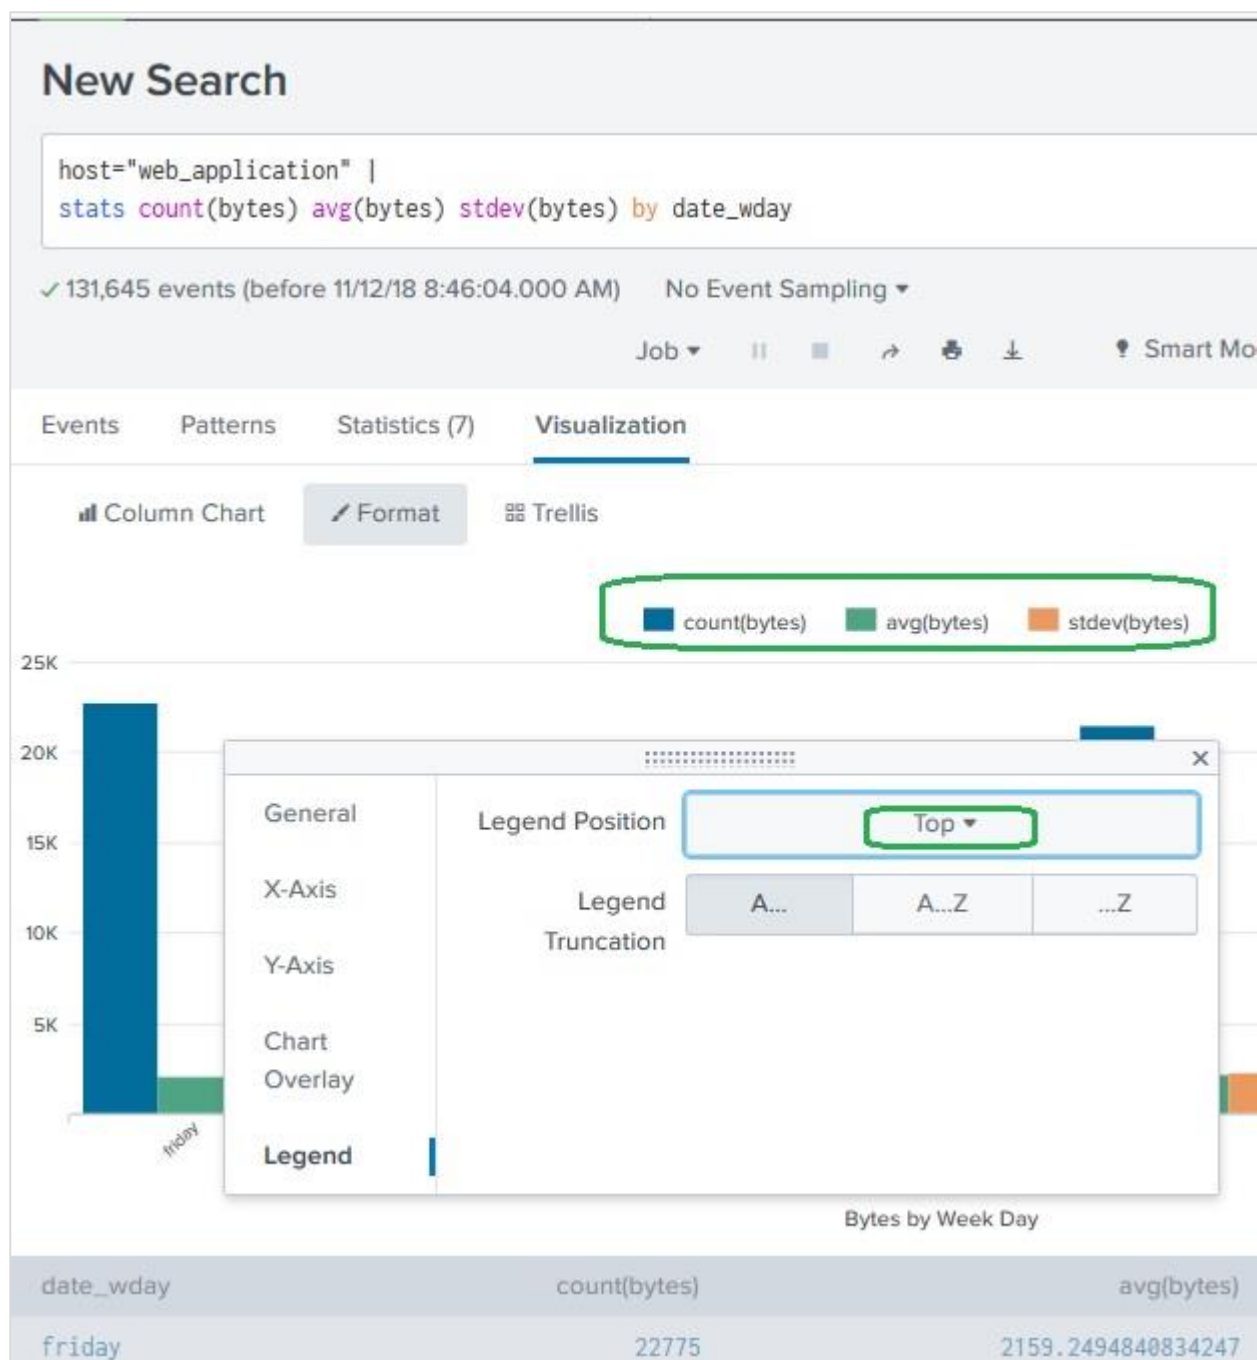

# 31. Splunk – Monitor Files

Splunk Enterprise monitors and indexes the file or directory as new data appears. You can also specify a mounted or shared directory, including network file systems, as long as Splunk Enterprise can read from the directory. If the specified directory contains subdirectories, the monitor process recursively examines them for new files, as long as the directories can be read.

You can include or exclude files or directories from being read by using whitelists and blacklists.

If you disable or delete a monitor input, Splunk Enterprise does not stop indexing the files: input references. It only stops checking those files again.

You specify the path to a file or directory and the monitor processor consumes any new data written to that file or directory. This is how you can monitor live application logs such as those coming from Web access logs, Java 2 Platform or .NET applications, and so on.

## Add files to Monitor

---

Using Splunk web interface, we can add files or directories to be monitored. We go to **Splunk Home -> Add Data -> Monitor** as shown in the below image:

splunk>enterprise 2 Messages Settings

## What data do you want to send to the Splunk platform?

Follow guides for onboarding popular data sources

**Networking**  
Get your networking data in to the Splunk platform.  
2 data sources

**OS Operating System**  
Get your operating system data in to the Splunk platform.  
1 data source

**Security**  
Get your security data in to the Splunk platform.  
3 data sources


3 data sources in total

## Or get data in with the following methods

**Upload**  
files from my computer  
Local log files  
Local structured files (e.g. CSV)  
[Tutorial for adding data](#)

**Monitor**  
files and ports on this Splunk platform instance  
Files - HTTP - WMI - TCP/UDP - Scripts  
Modular inputs for external data sources

On clicking Monitor, it brings up the list of types of files and directory you can use to monitor the files. Next, we choose the file we want to monitor.

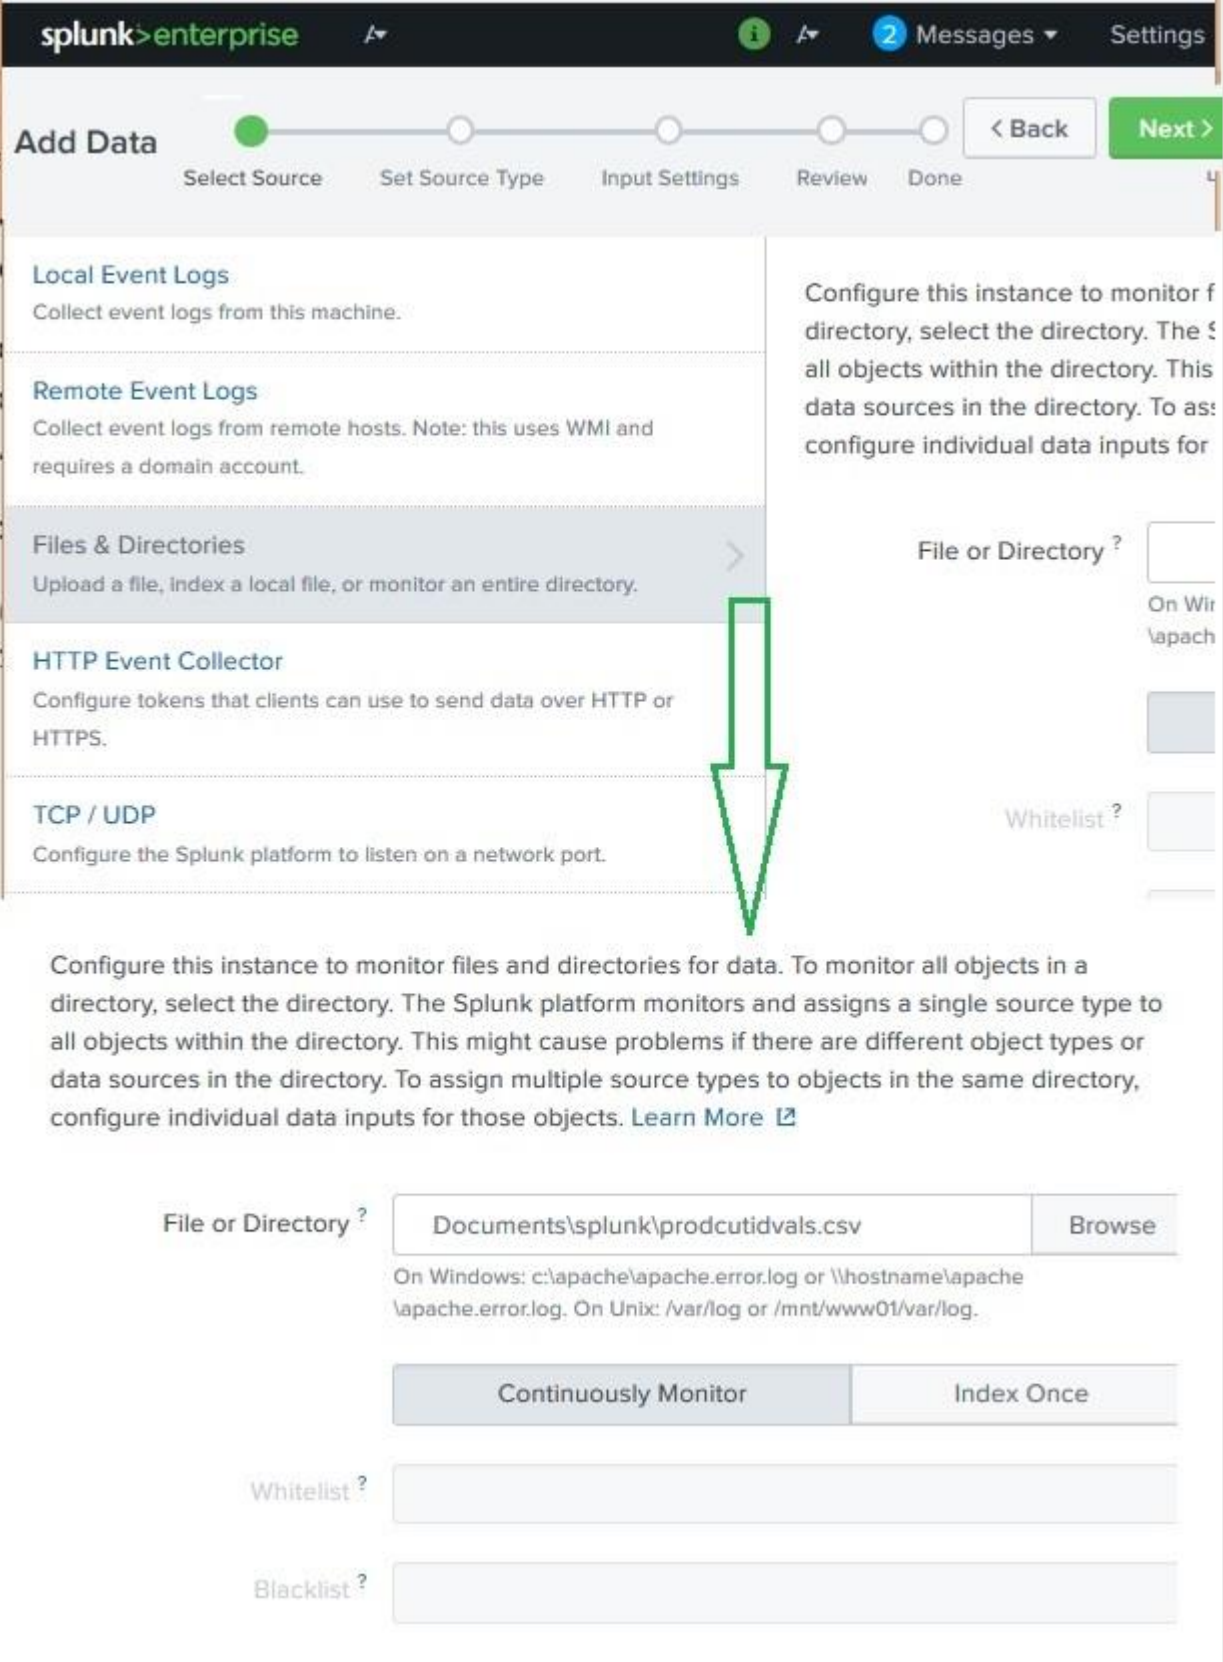

**splunk>enterprise** Messages Settings

**Add Data** Select Source Set Source Type Input Settings Review Done < Back Next >

**Local Event Logs**  
Collect event logs from this machine.

**Remote Event Logs**  
Collect event logs from remote hosts. Note: this uses WMI and requires a domain account.

**Files & Directories** >  
Upload a file, index a local file, or monitor an entire directory.

**HTTP Event Collector**  
Configure tokens that clients can use to send data over HTTP or HTTPS.

**TCP / UDP**  
Configure the Splunk platform to listen on a network port.

Configure this instance to monitor files and directories for data. To monitor all objects in a directory, select the directory. The Splunk platform monitors and assigns a single source type to all objects within the directory. This might cause problems if there are different object types or data sources in the directory. To assign multiple source types to objects in the same directory, configure individual data inputs for those objects. [Learn More](#)

File or Directory?

On Windows:

Whitelist?

File or Directory?

On Windows: c:\apache\apache.error.log or \\hostname\apache\apache.error.log. On Unix: /var/log or /mnt/www01/var/log.

☒ Continuously Monitor ☐ Index Once

Whitelist?

Blacklist?

Next, we choose the default values as Splunk is able to parse the file and configure the options for monitoring automatically.

After the final step, we see the below result which captures the events from the file to be monitored.

**New Search**

source="C:\\Users\\Documents\\TP\_AWS\\splunk\\prodcutidvals.csv"  
 host="DESKTOP-JKQCPLP" sourcetype="csv"

All time

✓ 18 events (before 11/13/18 10:13:11.000 AM) No Event Sampling ▾

Job ▾ || ■ ↻ ⌂ ⬇ ⚡ Smart Mo

**Events (18)** Patterns Statistics Visualization

Format Timeline ▾ — Zoom Out + Zoom to Selection X Deselect

18  
12  
6

12:27:23.000 PM  
Tue Oct 30  
2018

12:27:23.000 PM 12:27:23.000 PM 12:27:23.000 PM 12:27:23.000 PM

> Show Fields List ▾ / Format 20 Per Page ▾

| i | Time                        | Event                                                                               |
|---|-----------------------------|-------------------------------------------------------------------------------------|
| > | 10/30/18<br>12:27:23.000 PM | SF-BVS-G01, Hard Drive<br>host = DESKTOP-JKQCPLP productdescription = Hard Drive    |
| > | 10/30/18<br>12:27:23.000 PM | GT-SC-G01, Battery<br>host = DESKTOP-JKQCPLP productdescription = Battery           |
| > | 10/30/18<br>12:27:23.000 PM | WSC-MG-G10, Usb Light<br>host = DESKTOP-JKQCPLP productdescription = Usb Light      |
| > | 10/30/18<br>12:27:23.000 PM | CU-PG-G06, EBook Reader<br>host = DESKTOP-JKQCPLP productdescription = EBook Reader |

If any of the value in the event changes, then the above result gets updated to show the latest result.

## 32. Splunk – Sort Command

The **sort** command sorts all the results by specified fields. The missing fields are treated as having the smallest or largest possible value of that field if the order is descending or ascending, respectively. If the first argument to the sort command is a number, then at most that many results are returned, in order. If no number is specified, the default limit of 10000 is used. If the number 0 is specified, all of the results are returned.

### Sorting by Field Types

---

We can assign specific data type for the fields being searched. The existing data type in the Splunk dataset may be different than the data type we enforce in the search query. In the below example, we sort the status field as numeric in ascending order. Also, the field named url is searched as a string and the negative sign indicates descending order of sorting.

**splunk>enterprise** Messages Settings Activity

Search Datasets Reports Alerts Dashboards

## New Search Save As

host="web\_application" | sort num(status), -str(url)

✓ 10,000 events (before 11/13/18 8:10:25.000 PM) No Event Sampling

Job

Events (10,000) Patterns Statistics Visualization

Format Timeline Zoom Out Zoom to Selection Deselect

12:00 AM Thu Oct 11 2018 12:00 PM 12:00 AM Fri Oct 12 12

Show Fields List Format 20 Per Page Prev 1 2 3 4 5 6

| i | Time                        | Event                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/12/18<br>11:59:45.000 PM | 192.188.106.240 - - [12/Oct/2018:23:59:45] "GET /category.screen?categoryId=TEE&JSESSIONID=SD2SL4FF9ADFF4959 HTTP 1.1" 200 2958 "http://www.buttercupgames.com/category.screen?categoryId=TEE" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_13_1; rv:58.0) AppleWebKit/536.5 (KHTML, like Gecko) Chrome/19.0.1084.46 Safari/536.5" 602 bytes = 2958   file = category.screen   host = web_application   status = 200   uri = /category.screen?categoryId=TEE&JSESSIONID=SD2SL4FF9ADFF4959                                              |
| > | 10/12/18<br>11:59:41.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:41] "POST /cart.do?action=addtocart&productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963 HTTP 1.1" 200 669 "http://www.buttercupgames.com/product.screen?productId=MB-AG-G07" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_13_1; rv:58.0) AppleWebKit/534.46 (KHTML, like Gecko) Version/5.1 Mobile/9A5319.48.3" 197 bytes = 669   file = cart.do   host = web_application   productId = MB-AG-G07   status = 200   uri = /cart.do?action=addtocart&productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963 |
| > | 10/12/18<br>11:59:39.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:39] "GET /product.screen?productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963 HTTP 1.1" 200 2223 "http://www.buttercupgames.com/category.screen?categoryId=ARCA" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_13_1; rv:58.0) AppleWebKit/534.46 (KHTML, like Gecko) Version/5.1 Mobile/9A5319.48.3" 2223 bytes = 2223   file = product.screen   host = web_application   productId = MB-AG-G07   status = 200   uri = /product.screen?productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963               |

## Sorting up to a Limit

We can also specify the number of results that will be sorted instead of the entire search result. The below search result shows the sorting of only 50 events with **status** as ascending and **url** as descending.

splunk>enterprise

Messages Settings Activity

Search Datasets Reports Alerts Dashboards

## New Search

Save As

host="web\_application" | sort 50 num(status), -str(url) All time

✓ 50 events (before 11/13/18 8:37:59.000 PM) No Event Sampling

Job

Events (50) Patterns Statistics Visualization


Format Timeline Zoom Out Zoom to Selection Deselect

> Show Fields List Format 20 Per Page < Prev

| i | Time                        | Event                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/12/18<br>11:59:45.000 PM | 192.188.106.240 - - [12/Oct/2018:23:59:45] "GET /category.screen?categoryId=TEE&JSESSIONID=SD2SL4FF9ADFF4959" HTTP 1.1" 200 2958 "http://www.buttercupgames.com/category.screen?categoryId=TEE" "Mozilla/5.0 (Windows NT 6.1; WOW64) AppleWebKit/536.5 (KHTML, like Gecko) Chrome/19.0.1084.46 Safari/536.5" 602<br>bytes = 2958   file = category.screen   host = web_application   status = 200  <br>uri = /category.screen?categoryId=TEE&JSESSIONID=SD2SL4FF9ADFF4959                                            |
| > | 10/12/18<br>11:59:41.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:41] "POST /cart.do?action=addtocart&productId=6FF7ADFF4963 HTTP 1.1" 200 669 "http://www.buttercupgames.com/product.screen?productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963" (iPad; CPU OS 5_1_1 like Mac OS X) AppleWebKit/534.46 (KHTML, like Gecko) Version/5.1 Mobile/9A5203.211 197<br>bytes = 669   file = cart.do   host = web_application   productId = MB-AG-G07   status = 200  <br>uri = /cart.do?action=addtocart&productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963 |
| > | 10/12/18<br>11:59:39.000 PM | 212.235.92.150 - - [12/Oct/2018:23:59:39] "GET /product.screen?productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963 HTTP 1.1" 200 2223 "http://www.buttercupgames.com/category.screen?categoryId=ARCA" OS 5_1_1 like Mac OS X) AppleWebKit/534.46 (KHTML, like Gecko) Version/5.1 Mobile/9A5203.211 2223<br>bytes = 2223   file = product.screen   host = web_application   productId = MB-AG-G07  <br>uri = /product.screen?productId=MB-AG-G07&JSESSIONID=SD4SL6FF7ADFF4963                                            |
| > | 10/12/18<br>11:59:27.000 PM | 192.188.106.240 - - [12/Oct/2018:23:59:27] "GET /oldlink?&JSESSIONID=SD2SL4FF9ADFF4959" p://www.buttercupgames.com/oldlink" "Mozilla/5.0 (Windows NT 6.1; WOW64) AppleWebKit/536.5 (KHTML, like Gecko) Chrome/19.0.1084.46 Safari/536.5" 674<br>bytes = 1911   file = oldlink   host = web_application   status = 200  <br>uri = /oldlink?&JSESSIONID=SD2SL4FF9ADFF4959                                                                                                                                              |

## Using Reverse

We can toggle the result of an entire search query by using the reverse clause. It is useful to use the existing query without altering and reversing the sort result as and when needed.

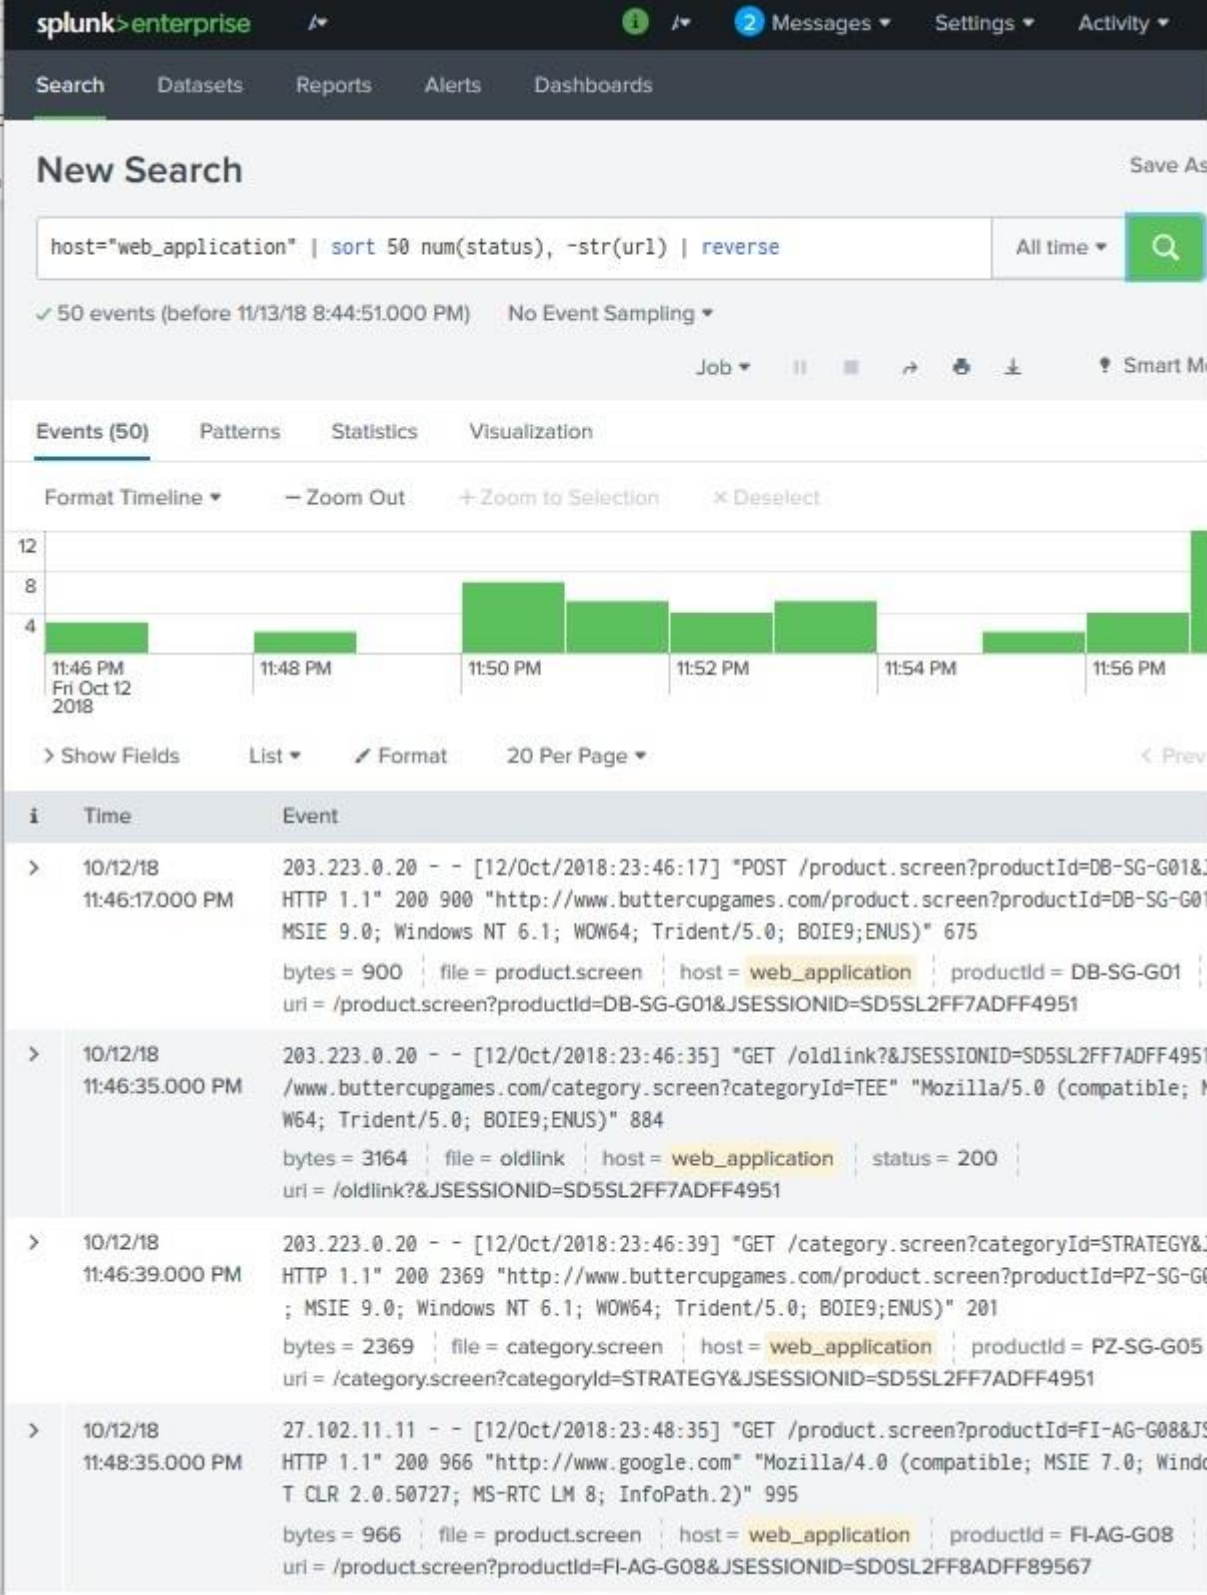

The screenshot shows the Splunk Enterprise interface with a search query: `host="web_application" | sort 50 num(status), -str(url) | reverse`. The search results are displayed in a table format, showing event details including time, source IP, and HTTP request details.


| i | Time                        | Event                                                                                                                                                                                                                                                                                                                                                                                                      |
|---|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > | 10/12/18<br>11:46:17.000 PM | 203.223.0.20 - - [12/Oct/2018:23:46:17] "POST /product.screen?productId=DB-SG-G01&J HTTP 1.1" 200 900 "http://www.buttercupgames.com/product.screen?productId=DB-SG-G01 MSIE 9.0; Windows NT 6.1; WOW64; Trident/5.0; BOIE9;ENUS)" 675<br>bytes = 900   file = product.screen   host = web_application   productId = DB-SG-G01   uri = /product.screen?productId=DB-SG-G01&JSESSIONID=SD5SL2FF7ADFF4951    |
| > | 10/12/18<br>11:46:35.000 PM | 203.223.0.20 - - [12/Oct/2018:23:46:35] "GET /oldlink?&JSESSIONID=SD5SL2FF7ADFF4951 /www.buttercupgames.com/category.screen?categoryId=TEE" "Mozilla/5.0 (compatible; M W64; Trident/5.0; BOIE9;ENUS)" 884<br>bytes = 3164   file = oldlink   host = web_application   status = 200   uri = /oldlink?&JSESSIONID=SD5SL2FF7ADFF4951                                                                         |
| > | 10/12/18<br>11:46:39.000 PM | 203.223.0.20 - - [12/Oct/2018:23:46:39] "GET /category.screen?categoryId=STRATEGY&J HTTP 1.1" 200 2369 "http://www.buttercupgames.com/product.screen?productId=PZ-SG-G0 ; MSIE 9.0; Windows NT 6.1; WOW64; Trident/5.0; BOIE9;ENUS)" 201<br>bytes = 2369   file = category.screen   host = web_application   productId = PZ-SG-G05 uri = /category.screen?categoryId=STRATEGY&JSESSIONID=SD5SL2FF7ADFF4951 |
| > | 10/12/18<br>11:48:35.000 PM | 27.102.11.11 - - [12/Oct/2018:23:48:35] "GET /product.screen?productId=FI-AG-G08&JS HTTP 1.1" 200 966 "http://www.google.com" "Mozilla/4.0 (compatible; MSIE 7.0; Windo T CLR 2.0.50727; MS-RTC LM 8; InfoPath.2)" 995<br>bytes = 966   file = product.screen   host = web_application   productId = FI-AG-G08   uri = /product.screen?productId=FI-AG-G08&JSESSIONID=SD0SL2FF8ADFF89567                   |

# 33. Splunk – Top Command

Many times, we are interested in finding the most common values available in a field. The **top** command in Splunk helps us achieve this. It further helps in finding the count and percentage of the frequency the values occur in the events.

## Top Values for a Field

In its simplest form, we just get the count and the percentage of such count as compared to the total number of events. In the below example, we find 8 top most productid values.

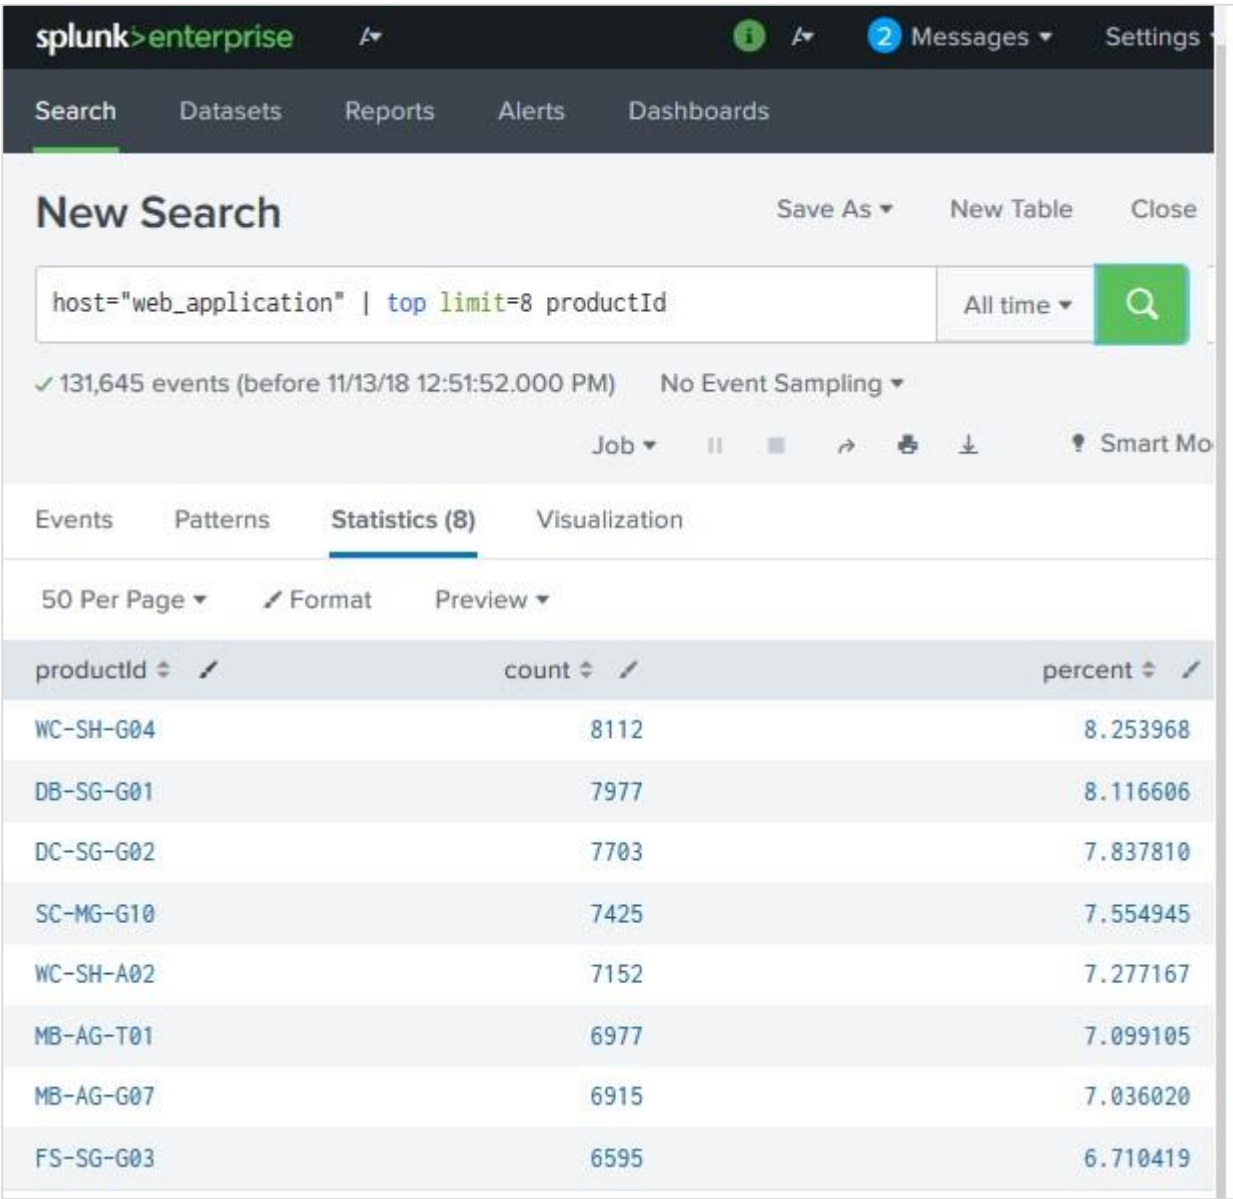


The screenshot shows the Splunk Enterprise web interface. The search bar contains the query `host="web_application" | top limit=8 productId`. The search results are displayed in a table under the 'Statistics (8)' tab. The table has three columns: productid, count, and percent. The results show the top 8 product IDs and their corresponding counts and percentages.

| productid | count | percent  |
|-----------|-------|----------|
| WC-SH-G04 | 8112  | 8.253968 |
| DB-SG-G01 | 7977  | 8.116606 |
| DC-SG-G02 | 7703  | 7.837810 |
| SC-MG-G10 | 7425  | 7.554945 |
| WC-SH-A02 | 7152  | 7.277167 |
| MB-AG-T01 | 6977  | 7.099105 |
| MB-AG-G07 | 6915  | 7.036020 |
| FS-SG-G03 | 6595  | 6.710419 |

## Top Values for a Field by a Field

Next, we can also include another field as part of this top command's by clause to display the result of field1 for each set of field2. In the below search, we find top 3 productids for each file name. Note how the file names are repeated 3 times showing different productid for that file.

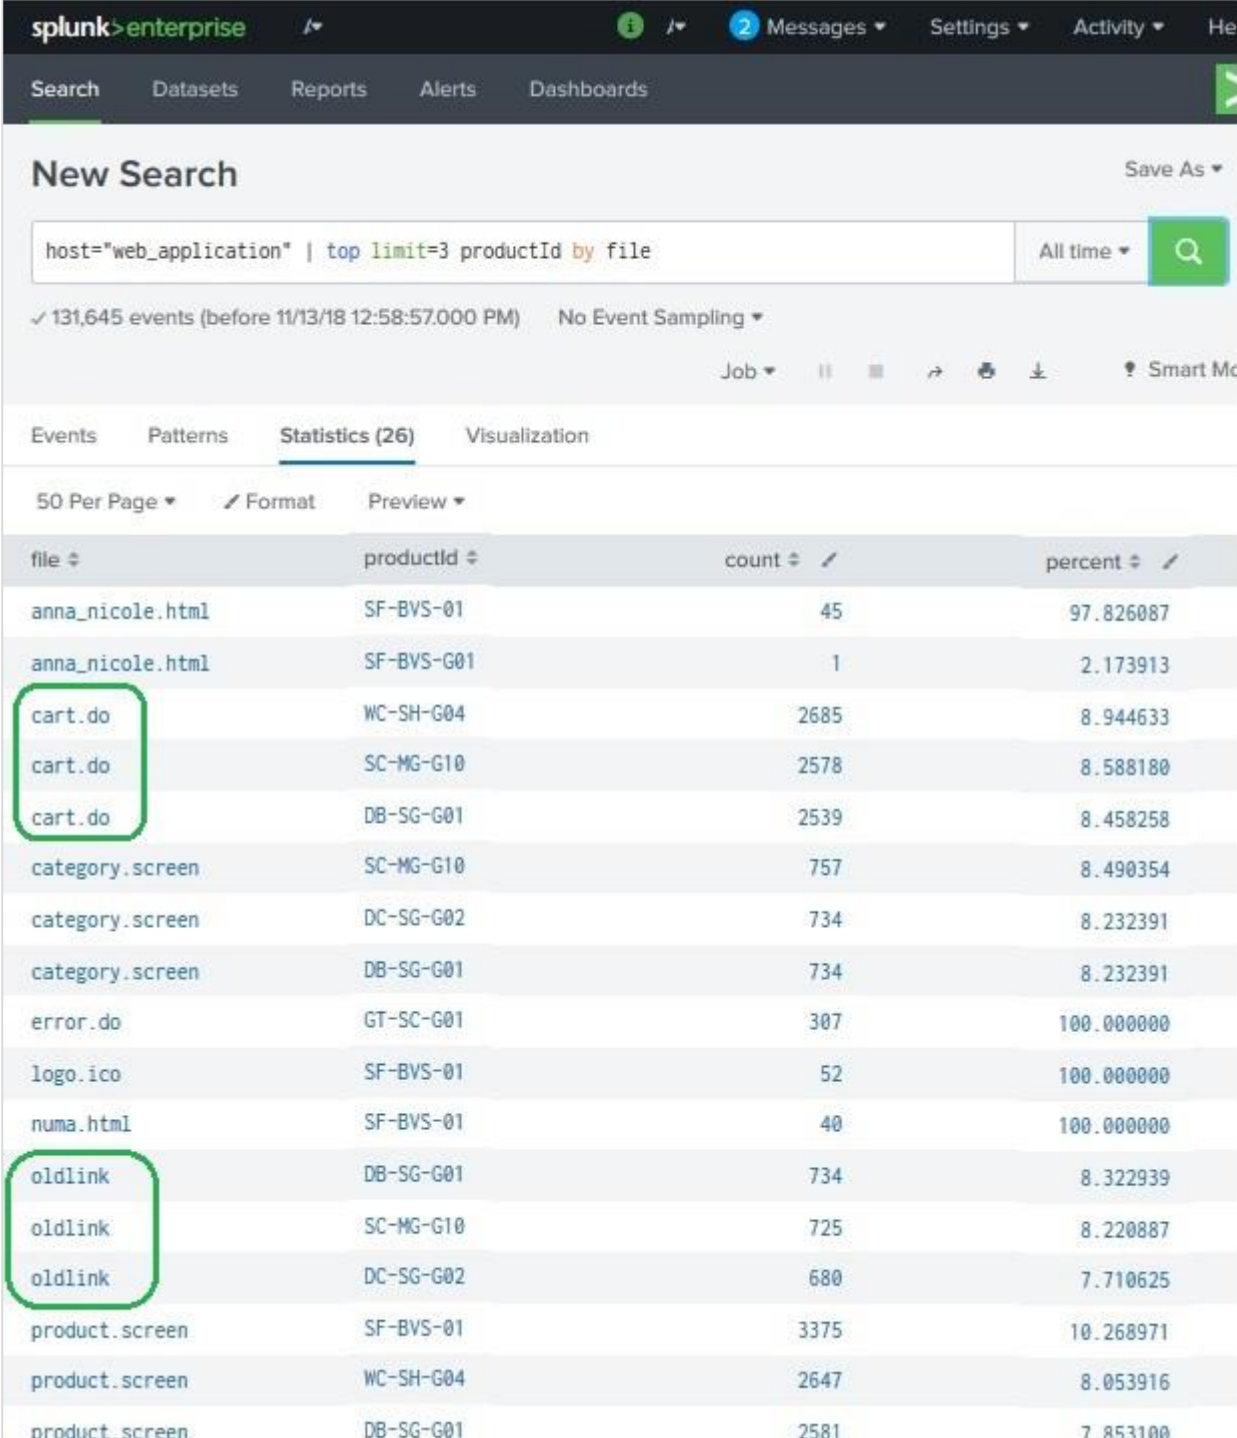

**New Search** Save As ▾

host="web\_application" | top limit=3 productId by file All time ▾ 🔍

✓ 131,645 events (before 11/13/18 12:58:57.000 PM) No Event Sampling ▾

Job ▾ || 🔄 📄 📌 📥 📤 🔔 Smart Monitor


Events Patterns **Statistics (26)** Visualization

50 Per Page ▾ 🔧 Format 👁 Preview ▾

| file             | productId  | count | percent    |
|------------------|------------|-------|------------|
| anna_nicole.html | SF-BVS-01  | 45    | 97.826087  |
| anna_nicole.html | SF-BVS-G01 | 1     | 2.173913   |
| cart.do          | WC-SH-G04  | 2685  | 8.944633   |
| cart.do          | SC-MG-G10  | 2578  | 8.588180   |
| cart.do          | DB-SG-G01  | 2539  | 8.458258   |
| category.screen  | SC-MG-G10  | 757   | 8.490354   |
| category.screen  | DC-SG-G02  | 734   | 8.232391   |
| category.screen  | DB-SG-G01  | 734   | 8.232391   |
| error.do         | GT-SC-G01  | 307   | 100.000000 |
| logo.ico         | SF-BVS-01  | 52    | 100.000000 |
| numa.html        | SF-BVS-01  | 40    | 100.000000 |
| oldlink          | DB-SG-G01  | 734   | 8.322939   |
| oldlink          | SC-MG-G10  | 725   | 8.220887   |
| oldlink          | DC-SG-G02  | 680   | 7.710625   |
| product.screen   | SF-BVS-01  | 3375  | 10.268971  |
| product.screen   | WC-SH-G04  | 2647  | 8.053916   |
| product.screen   | DB-SG-G01  | 2581  | 7.853100   |

## Show Options

We can also decide to show specific columns by using additional options available in Splunk with the Top Command. In the below command, we disable to show the percentage option and display only the top product ID by File name.

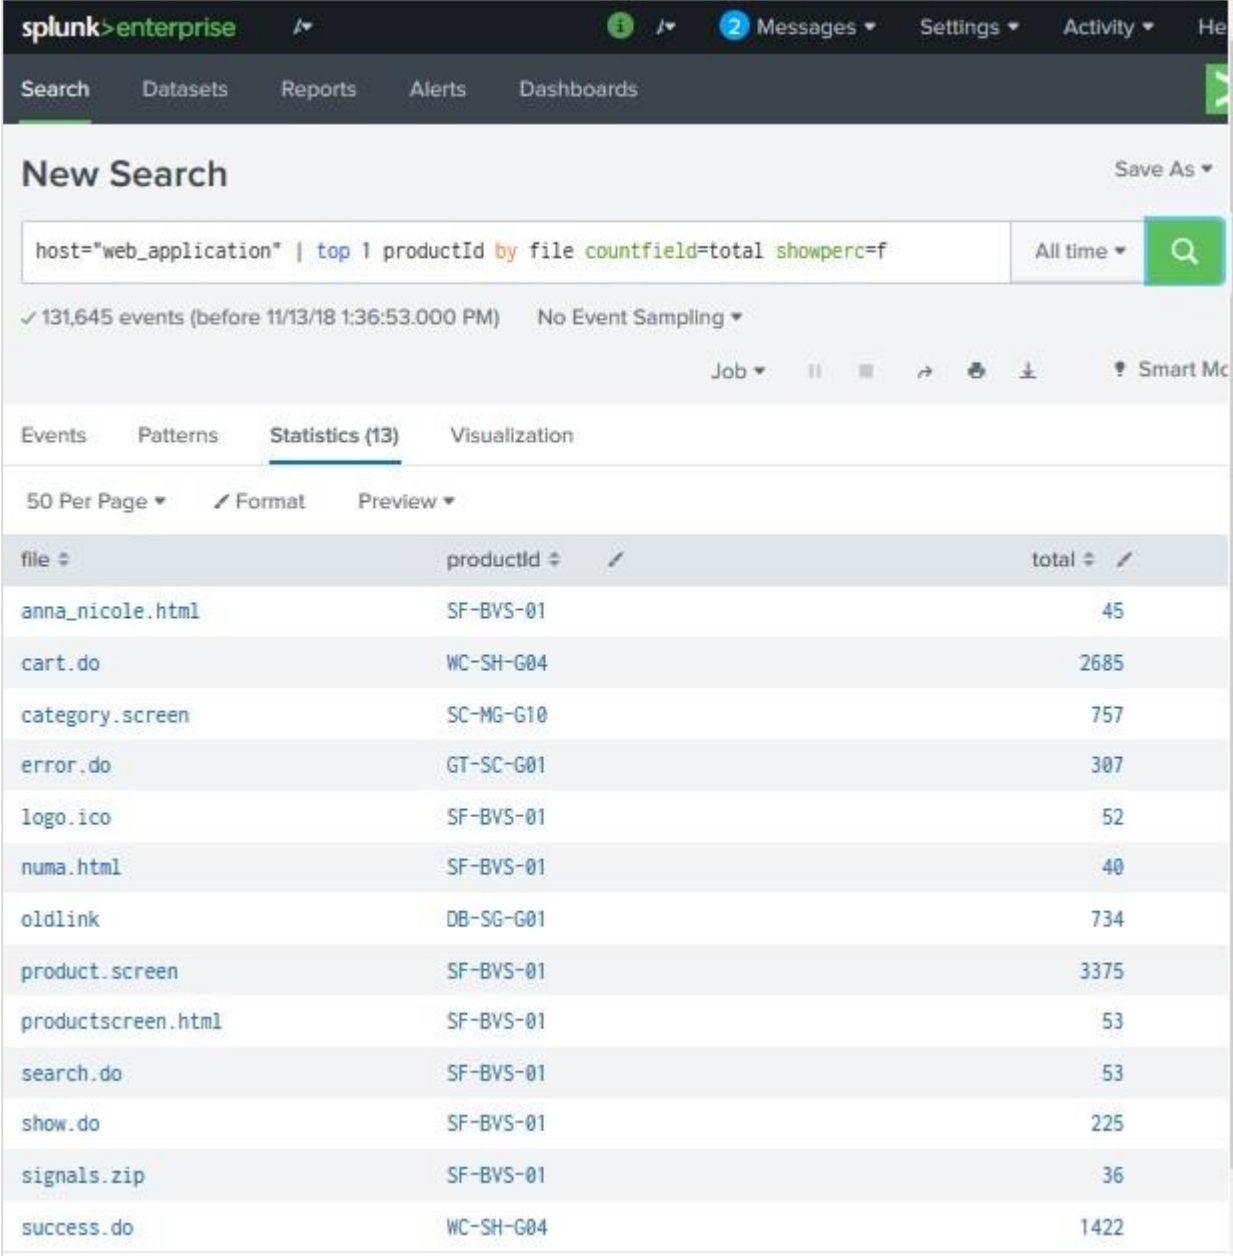

The screenshot shows the Splunk Search interface. The search bar contains the command: `host="web_application" | top 1 productId by file countfield=total showperc=f`. The search results are displayed in a table with the following columns: file, productId, and total. The table shows 13 results, with the top result being 'product.screen' with a total of 3375.

| file               | productId | total |
|--------------------|-----------|-------|
| anna_nicole.html   | SF-BVS-01 | 45    |
| cart.do            | WC-SH-G04 | 2685  |
| category.screen    | SC-MG-G10 | 757   |
| error.do           | GT-SC-G01 | 307   |
| logo.ico           | SF-BVS-01 | 52    |
| numa.html          | SF-BVS-01 | 40    |
| oldlink            | DB-SG-G01 | 734   |
| product.screen     | SF-BVS-01 | 3375  |
| productscreen.html | SF-BVS-01 | 53    |
| search.do          | SF-BVS-01 | 53    |
| show.do            | SF-BVS-01 | 225   |
| signals.zip        | SF-BVS-01 | 36    |
| success.do         | WC-SH-G04 | 1422  |

## 34. Splunk – Stats Command

The stats command is used to calculate summary statistics on the results of a search or the events retrieved from an index. The stats command works on the search results as a whole and returns only the fields that you specify.

Each time you invoke the stats command, you can use one or more functions. However, you can only use one BY clause. If the stats command is used without a BY clause, only one row is returned, which is the aggregation over the entire incoming result set. If a BY clause is used, one row is returned for each distinct value specified in the BY clause.

Below we see the examples on some frequently used stats command.

### Finding Average

---

We can find the average value of a numeric field by using the **avg()** function. This function takes the field name as input. Without a BY clause, it will give a single record which shows the average value of the field for all the events. But with a by clause, it will give multiple rows depending on how the field is grouped by the additional new field.

In the below example, we find the average byte size of the files grouped by the various http status code linked to the events associated with those files.

The screenshot shows the Splunk Enterprise web interface. At the top, there's a navigation bar with 'Search', 'Datasets', 'Reports', 'Alerts', and 'Dashboards'. Below this, the 'New Search' section displays the query `host="web_application" | stats avg(bytes) by status` and indicates that 131,645 events were found. The results are shown in a table with two columns: 'status' and 'avg(bytes)'. The table lists various HTTP status codes and their corresponding average byte sizes.

| status | avg(bytes)         |
|--------|--------------------|
| 200    | 2191.187422765344  |
| 400    | 2116.0206929740134 |
| 403    | 1823.4197828709289 |
| 404    | 2070.8220153340635 |
| 406    | 2098.6553537284894 |
| 408    | 2089.915982617093  |
| 500    | 2098.8101761252447 |
| 503    | 2092.354336283186  |
| 505    | 2083.1005917159764 |

## Finding Range

The stats command can be used to display the range of the values of a numeric field by using the **range** function. We continue the previous example but instead of average, we now use the **max()**, **min()** and **range** function together in the stats command so that we can see how the range has been calculated by taking the difference between the values of max and min columns.



splunk>enterprise

Search Datasets Reports Alerts Dashboards

## New Search

Save As New Table Close

host="web\_application" | stats mean(bytes) var(bytes) by status All time

✓ 131,645 events (before 11/19/18 9:14:30.000 PM) No Event Sampling

Job

Events Patterns **Statistics (9)** Visualization

50 Per Page Format Preview

| status | mean(bytes)        | var(bytes)         |
|--------|--------------------|--------------------|
| 200    | 2191.187422765344  | 5304807.372529001  |
| 400    | 2116.0206929740134 | 1179873.994275495  |
| 403    | 1823.4197828709289 | 1462459.2462748317 |
| 404    | 2070.8220153340635 | 1198257.665290402  |
| 406    | 2098.6553537284894 | 1217765.0810664936 |
| 408    | 2089.915982617093  | 1239566.6518748675 |
| 500    | 2098.8101761252447 | 1183659.0711445606 |
| 503    | 2092.354336283186  | 1185161.3265968058 |
| 505    | 2083.1005917159764 | 1200765.841835327  |